

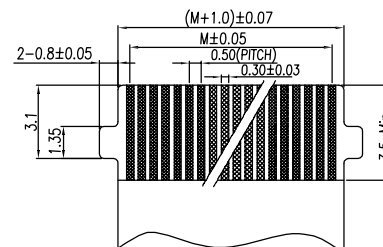
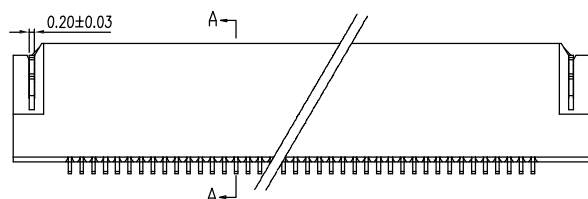



SECTION A-A(开合铁芯)

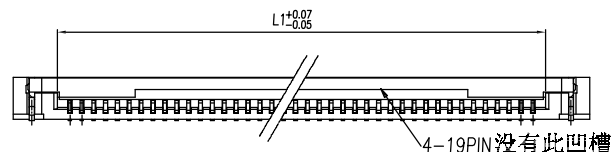

适用FPC寸法(带勾)

APPLICABLE FPC(+LOCK)

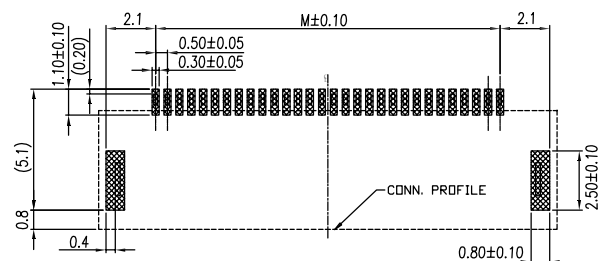

RECOMMENDED PCB LAYOUT

Specifications
Operating Temperature:-25°C to +85°C
Operating Voltage:50V AC/DC
Current Rating:0.5Amps
Dielectric Withstanding Volatge:500V AC/Minute
Insulation Resistance:500MQ Min.
Contact Resistance:0.03Ω Max.
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic,
UL 94V-0 LCP
All materials must meet GREENCONN hazardous
substances control standards.

PINS	M	L1	L	PINS	M	L1	L
04	1.5	2.56	6.3				
06	2.5	3.56	7.3				
08	3.5	4.56	8.3				
10	4.5	5.56	9.3				
12	5.5	6.56	10.3				
14	6.5	7.56	11.3				
15	7.0	8.06	11.8				
18	8.5	9.56	13.3				
20	9.5	10.56	14.3				
				50	24.5	25.56	29.3
30	14.5	15.56	19.3				
				60	29.5	30.56	34.3

Ordering Information

C FAD152 - XX XX A 004 C X S X

No. of Pins per Row
04,06,08,10,12,14
15,18,20,30,50,60

Standard Plating
02=Gold Flash
Selective Plating
05=Gold Flash/Tin

Color
2=White


Standard Packing
D=Tape&Reel



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X:±/
.X'±/
.XX'±/
.XXX'±/

X.±/
.X±0.25
.XX±0.15
.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CFAD152-CA004

PART NO.

CFAD152-XXXXA004CXSX

TITLE.

Pitch 0.5mm FFC CONN.ZIF SMT
FRONTFLIP 90° SMT