

F

E

D

C

B

A

F




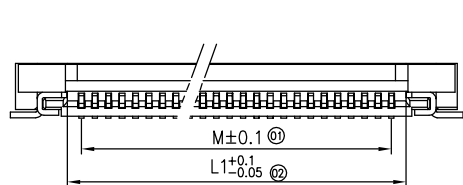
E

D

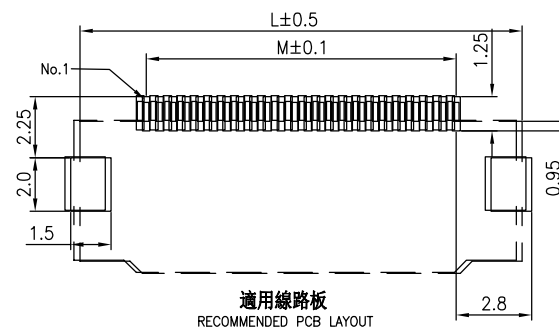
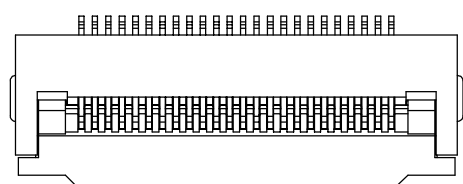
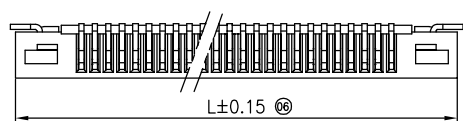
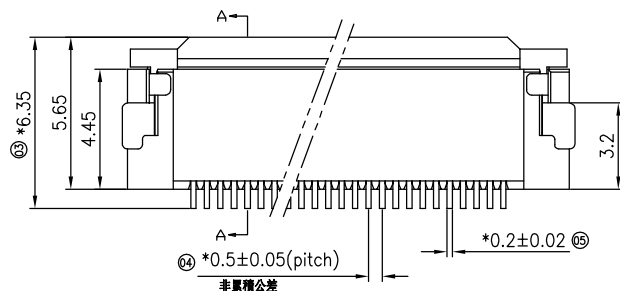
C

B

A



SECTION A-A

適用線路板
RECOMMENDED PCB LAYOUT

Ordering Information

CFAD153 - XX XX A001 C X A X

No. of Pins per Row
04-58, 60, 64, 68, 80Standard Plating
01=Tin
02=Gold FlashColor
1=Black
2=WhiteStandard Packing
C=Tube
Selective Packing
D=Tape Reel

Specifications

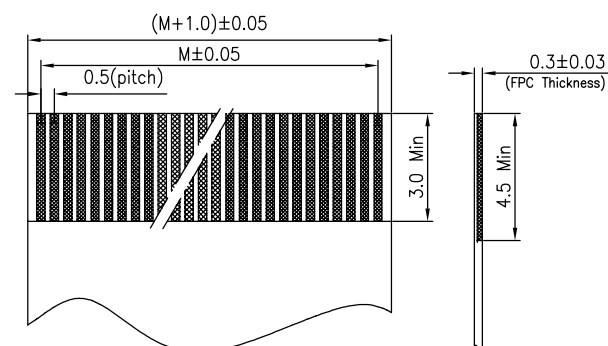
Operating Voltage: 50V AC/DC
Dielectric Withstanding: 500VAC
Insulation Resistance: 500MΩ Min.
Contact Resistance: 30mΩ Max.
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze

Fitting Nail: Phosphor Bronze

Actuator: PPS

Insulator Material: High Temperature,
Thermoplastic UL94V-0 LCPor the equivalent material
Test tape * marking dimensionsAll materials must meet Greenconn
requirement for environment protection.適用FPC尺法
APPLICABLE FPC

No. of PIN/ROW	Dimension	Information
M	L1	
04	1.50	2.56 6.40
05	2.00	3.06 6.90
06	2.50	3.56 7.40
07	3.00	4.06 7.90
08	3.50	4.56 8.40
09	4.00	5.06 8.90
10	4.50	5.56 9.40
11	5.00	6.06 9.90
12	5.50	6.56 10.40
13	6.00	7.06 10.90
14	6.50	7.56 11.40
15	7.00	8.06 11.90
16	7.50	8.56 12.40
17	8.00	9.06 12.90
18	8.50	9.56 13.40
19	9.00	10.06 13.90
20	9.50	10.56 14.40
21	10.00	11.06 14.90
22	10.50	11.56 15.40
23	11.00	12.06 15.90
24	11.50	12.56 16.40
25	12.00	13.06 16.90
26	12.50	13.56 17.40
27	13.00	14.06 17.90
28	13.50	14.56 18.40
29	14.00	15.06 18.90
30	14.50	15.56 19.40
31	15.00	16.06 19.90
32	15.50	16.56 20.40
33	16.00	17.06 20.90
34	16.50	17.56 21.40
35	17.00	18.06 21.90
36	17.50	18.56 22.40
37	18.00	19.06 22.90
38	18.50	19.56 23.40
39	19.00	20.06 23.90
40	19.50	20.56 24.40
41	20.00	21.06 24.90
42	20.50	21.56 25.40
43	21.00	22.06 25.90
44	21.50	22.56 26.40
45	22.00	23.06 26.90
46	22.50	23.56 27.40
47	23.00	24.06 27.90
48	23.50	24.56 28.40
49	24.00	25.06 28.90
50	24.50	25.56 29.40
51	25.00	26.06 29.90
52	25.50	26.56 30.40
53	26.00	27.06 30.90
54	26.50	27.56 31.40
55	27.00	28.06 31.90
56	27.50	28.56 32.40
57	28.00	29.06 32.90
58	28.50	29.56 33.40
60	29.50	30.56 34.40
64	31.50	32.56 36.40
68	33.50	34.56 38.40
80	39.50	40.56 44.40

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.*±3.0"	X.±
.X*±1.0"	.X±0.25
.XX*±	.XX±0.15
.XXX*±	.XXX±0.10

DESIGN:

DATE:

DWG. NO.

CFAD153-CA1CA

TITLE.

FPC 0.5Pitch connector.

CHECKED:

DATE:

PART NO.

CFAD153-XXXXA001CXAX

APPROVED:

DATE:

REV.	UNIT.	SCALE.	PAGE.
B4	mm	1:1	1/1

1

2

3

4

5

6

7

8

9