

1 2 3 4 5 6 7 8 9

F




E

D


C

B


A

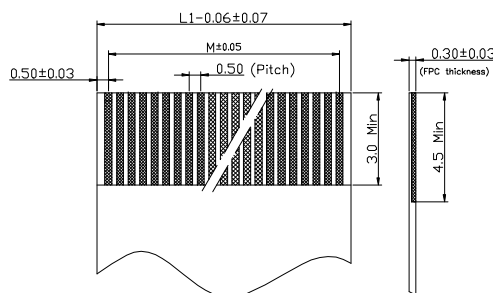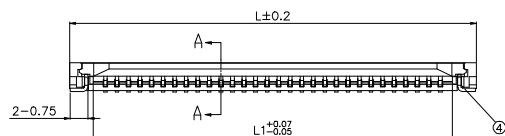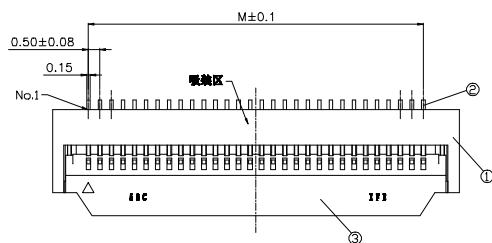

适用FPC寸法
APPLICABLE FPC

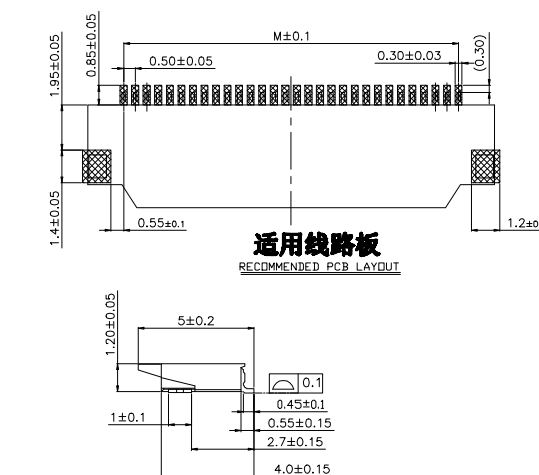

适用线路板
RECOMMENDED PCB LAYOUT



SECTION A-A(2:1)

技术指标:

- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
- 2、温度范围: -25° C~85° C;
- 3、额定电压: 50V, AC, DC(等效);
- 4、接触电阻: ≤0.03Ω;
- 5、绝缘电阻: ≥500MΩ;
- 6、耐压: 500V, AC/minute.
7. 所有材料必须满足GREENCONN有害物质管控标准。

PIN	M	L1	L
04	1.5	2.56	4.60
06	2.5	3.56	5.60
08	3.5	4.56	6.60
16	7.5	8.56	10.60
24	11.5	12.56	14.60
28	13.5	14.56	16.60
30	14.5	15.56	17.60
33	16.0	17.06	19.10
40	19.5	20.56	22.60
50	24.5	25.56	27.60
54	26.5	27.56	29.60

Ordering Information

C	FAD153	-	XX	XX	A	002	C	X	A	X
No. of Pins per Row		Standard Plating		Color		Standard Packing				
SEE TABLE		02=Gold Flash		2=White		C=Tube		Selective Packing		
						D=T&R				

4	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	整个表面镀底镍30u"MIN, 再镀锡 80u".MIN.
3	锁扣 Actuator	LCP(UL94V-0)	1	黑色/棕色
2	端子 Contact	磷青铜 Phosphor Bronze	n*1	整个表面镀底镍30u"MIN, 再镀金 2u".MIN.
1	基座 Housing	LCP(UL94V-0)	1	本色
序号	名称	材料	数量	附注

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE				DESIGN:	DATE:	DWG. NO.	TITLE.
REV.	UNIT.	SCALE.	PAGE.	APPROVED:	DATE:	CFAD153-CA2CA	PH0.5 FPC 下接 90度 SMT
01	mm	1:1	1/1			PART NO.	
						CFAD153-XXXXA002CXAX	

1 2 3 4 5 6 7 8 9