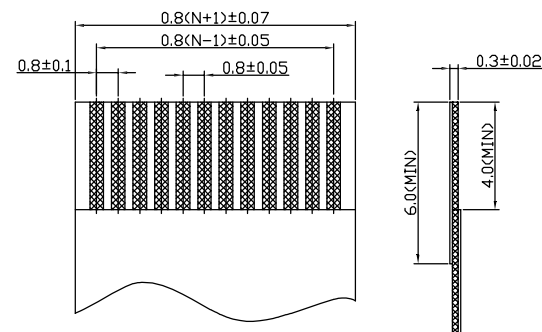

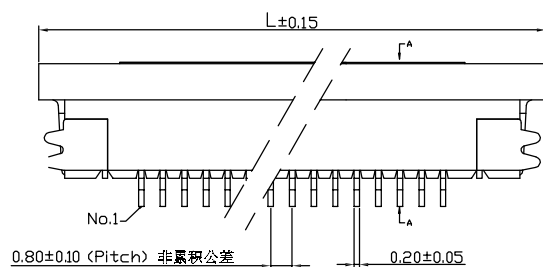

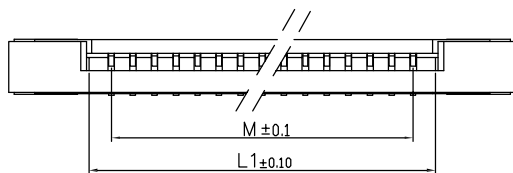


NOTES:

MATERIAL;
CONTACT: Phosphor Bronze
FITTING NAIL: Phosphor Bronze
HOUSING: LCP UL94V-0
ACTUATOR: LCP UL 94V-0
PLATING: SEE PART NUMBER

RATING

OPERATING TEMPERATURE: $-25\sim 85^{\circ}\text{C}$
 OPERATING VOLTAGE: 50V AC/DC
 CURRENT RATING: 0.5 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC/Minute;
 INSULATION RESISTANCE: 500M Ω Min;
 CONTACT RESISTANCE: 0.03 Ω Max;

適用FPC寸法
APPLICABLE FPC

Ordering Information

C FBD103 — XX XX A 002 C X A X

No. of Pins per Row
See table

Selective Plating
Q2=Gold Flash
Selective Plating
Q1=Tin

Color
1=Black
2=White


Standard Packing
D=Tape&Reel
Selective Packing
C=Tube



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

$$X^{\circ} \pm 5.0^{\circ}$$
$$Y^* \pm 3.0^\circ$$
$$\frac{.8 \pm 3.0}{.001 \pm 0.01}$$
$$\cdot XX \pm 2.0$$
$$XXX^{\circ} \pm 1.0^{\circ}$$

DESIGNED:

DATE:

CHECKED:

DATE:

~~APPROVED:~~

DATE:

DWG. NO.

CFBD103-CA002

PART NO.

CFBD103-XXXX A002CXAX

TITLE.

0.8mm FPC CONN. ZIF SMT DRAWER
H=2.0 UPPER CONTACT