

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A

F



E

D

C






B

A

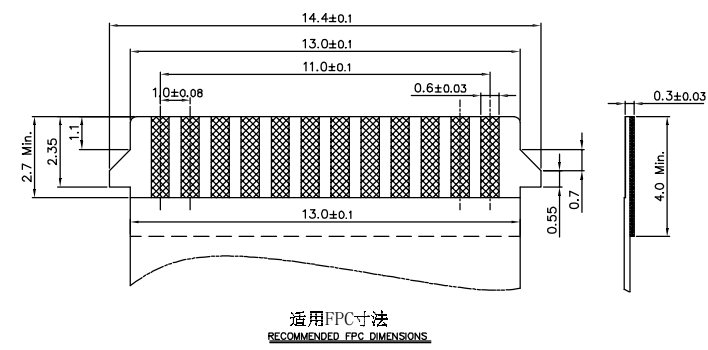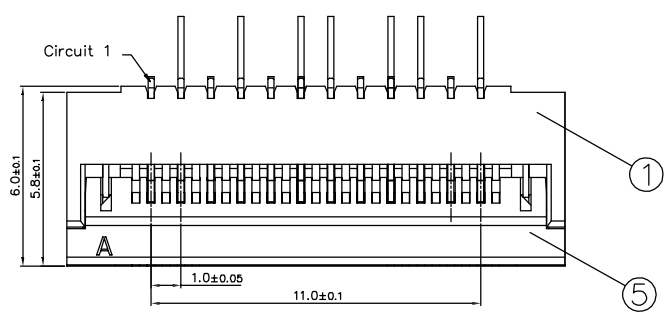

- NOTES.
1. MATERIAL SEE TABLE;
 2. PLATING SEE TABLE;
 3. RATING
 - 3-1. OPERATING TEMPERATURE: -40~105°C
 - 3-2. OPERATING VOLTAGE: 100V AC/DC
 - 3-3. CURRENT RATING: 1.0 AMPS
 - 3-4. DIELECTRIC WITHSTANDING VLTAGE: 500V AC/Minute;
 - 3-5. INSULATION RESISTANCE: 500MΩ Min;
 - 3-6. CONTACT RESISTANCE: 0.03Ω Max;

适用FPC寸法
RECOMMENDED FPC DIMENSIONS

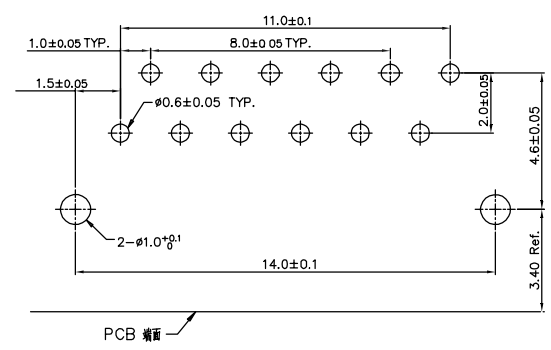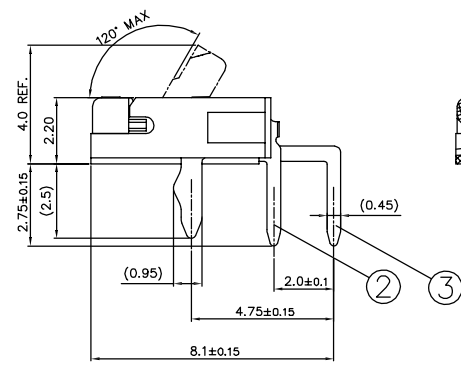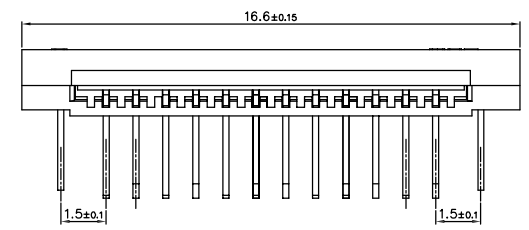

Ordering Information

C FCB126 - XX XX A 001 C X S X-06

No. of Pins per Row 12

Standard Plating
02=Gold Flash
Selective Plating
01=Tin

Color
2=White
1=Black

Standard Packing
C=Tube
Selective Packing
D=Tape&Reel

5	Actuator	LCP (UL94V-0)	1	黑色
4	Fitting Nail	磷青铜 Phosphor Bronze	2	鍍金 鍍金厚度30u"MIN, 鍍金30u".MIN.
3	B 接触 B Contact	磷青铜 Phosphor Bronze	6	鍍金 鍍金厚度30u"MIN, 鍍金GOLD FLASH..
2	A 接触 A Contact	磷青铜 Phosphor Bronze	6	鍍金 鍍金厚度30u"MIN, 鍍金GOLD FLASH..
1	Housing	LCP (UL94V-0)	1	棕色
序号	名称	材料	数量	附注

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X."±3.0"	X.±
.X"±0.5"	.X±0.25
.XX"±	.XX±0.15
.XXX"±	.XXX±0.05

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
CFCB126-CA1CS
PART NO.
CFCB126-12XXA001CX SX-06

TITLE.
1.0 FPC CONN. NON ZIF DIP FRONTAFLIP H=3.5 CONTACT

REV.	UNIT.	SCALE.	PAGE.
A	mm	1:1	1/1

1 2 3 4 5 6 7 8 9