

1 2 3 4 5 6 7 8 9

F




E

D





C

B


A

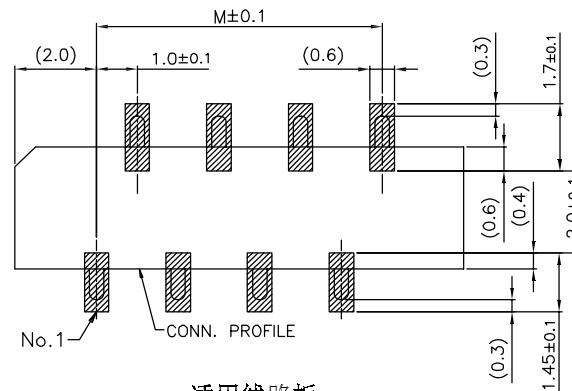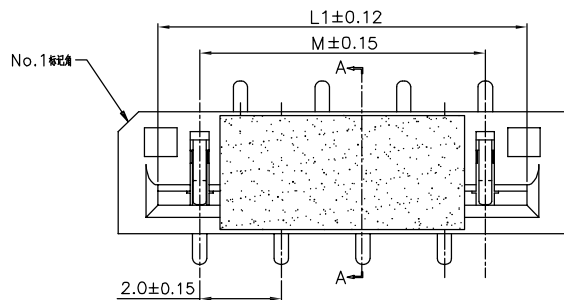

适用线路板
RECOMMENDED PCB LAYOUT

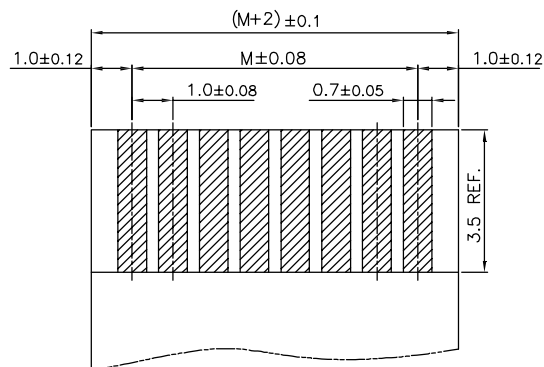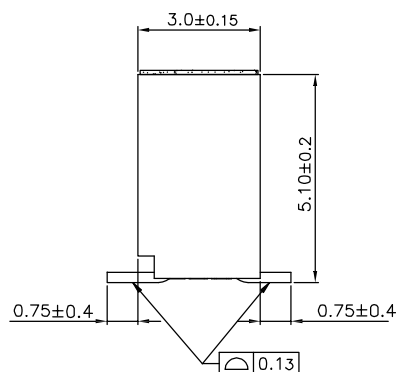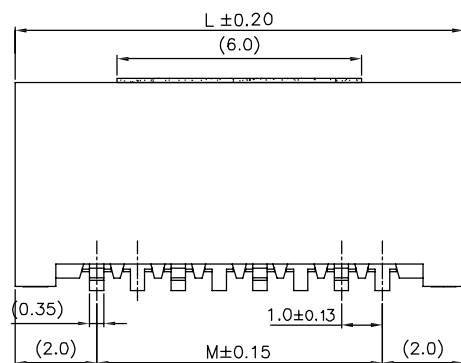

适用FPC尺寸
APPLICABLE FPC



NOTES:

1. MATERIAL ;
HOUSING: PA6T (UL94V-0)
CONTACT: PHOSPHOR BRONZE
2. PLATING SEE PART NUMBER
3. RATING
3-1. OPERATING TEMPERATURE: -25~85°C
3-2. OPERATING VOLTAGE: 125V AC/DC
3-3. CURRENT RATING: 0.5 AMPS
3-4. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/Minute;
3-5. INSULATION RESISTANCE: 100MΩ Min;
3-6. CONTACT RESISTANCE: 0.03Ω Max;

TABLE

No. of PIN/ROW	Dimension Information		
	Dim.M	Dim.L1	Dim.L
05	4.00	6.05	8.00
06	5.00	7.05	9.00
08	7.00	9.05	11.00
09	8.00	10.05	12.00
10	9.00	11.05	13.00
13	12.00	14.05	16.00
14	13.00	15.05	17.00
15	14.00	16.05	18.00
16	15.00	17.05	19.00
19	18.00	20.05	22.00
30	29.00	31.05	33.00

Ordering Information

C	FCC104	- XX	XX	A	003	B	X	A	X
No. of Pins per Row See Table			Standard Plating 01=Tin Selective Plating 02=Gold Flash 22=Matte Tin		Color 1=Black 2=White E=Beige		Standard Packing H=Mylar+Tape&Reel Selective Packing D=Tape&Reel		



3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X.*±3.0°	.X±0.25
.XX.*±2.0°	.XX±0.20
.XXX.*±1.0°	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
CFCC104-CA003
PART NO.
CFCC104-XXXXA003BXAX

TITLE.
1.00 FPC SMT VERTICAL
CONTACT CONNECTOR

1 2 3 4 5 6 7 8 9