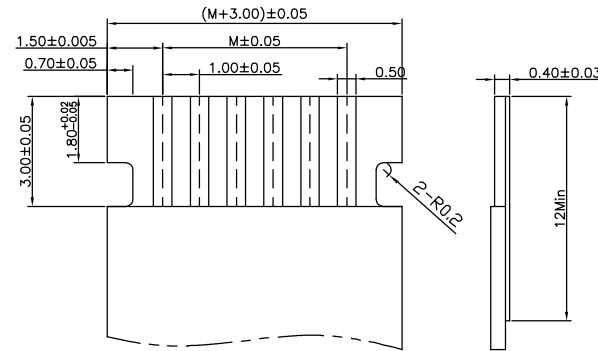
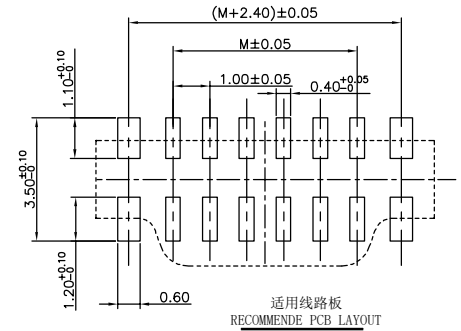
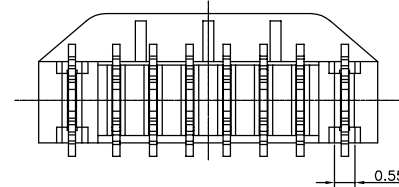

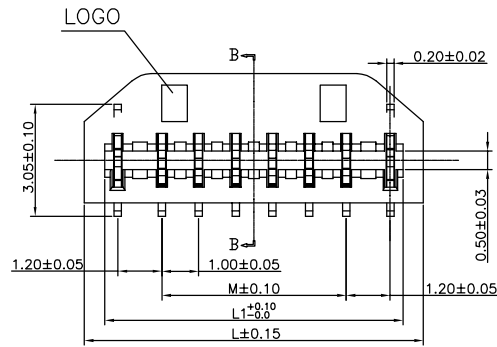
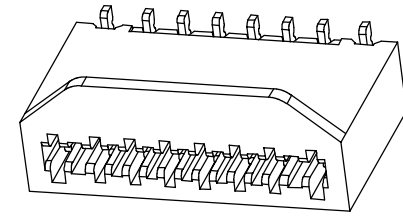


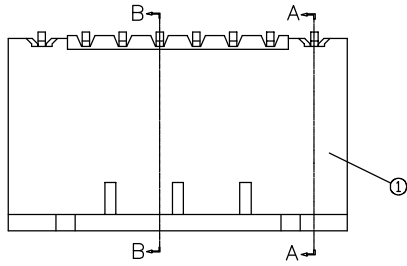


适用FPC寸法
APPLICABLE FPC

No. of PINS/ROW	M	L1	L
06	5.00	8.10	9.20
08	7.00	10.10	11.20
10	9.00	12.10	13.20
12	11.00	14.10	15.20


Specifications
Current Rating:1.0Amp
Operating Voltage:50V AC/DC
Insulation Resistance:100MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:0.03mΩMax.
Operating Temperature:-40°C to +85°C
Materials
Contact Material:Phosphor Bronze
Insulator Material: UL 94V-0 LCP
All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

CFCC104 - XX XX A 008 C X A X
No. Of Pins Per Row 06.08.10.12 Standard Plating XX Color 2=White Standard Packing D=T&R



3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX±0.15
.XXX.*±1.0°	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

CFCC104-CA008

TITLE.

1.0 FPC CONN NON-ZIF SMT
H=5.40 VERTICAL CONTACT

CHECKED:

DATE:

PART NO.

CFCC104-XXXXA008CXAX

APPROVED:

DATE:

REV.	UNIT.	SCALE.
A	mm	1:1