
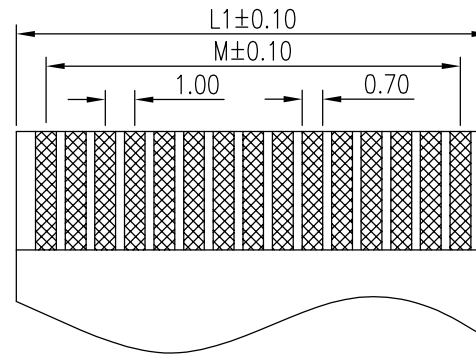

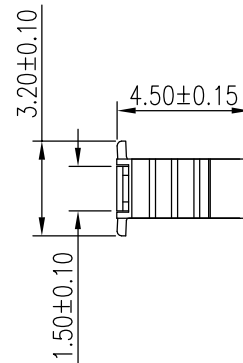


RECOMMENDED PCB LAYOUT

Specifications
 Voltage Rating: 50V(AC,DC)
 Current Rating: 0.5A(AC,DC)
 Insulation Resistance: 500MΩ Min.
 Dielectric Withstanding: 500V AC/minute
 Contact Resistance: 0.05mΩ Max.
 Operating Temperature: -25°C to +85°C
 Materials
 Terminal: Phosphor Bronze, Tin plated.
 Solder Tab: Phosphor Bronze, Tin Plated
 Housing: High Temperature Thermoplastic,
 UL 94V-0 LCP or the equivalent material.
 Loeker: PPS, UL 94V-0.
 All materials must meet Greenconn
 requirement for environment protection.

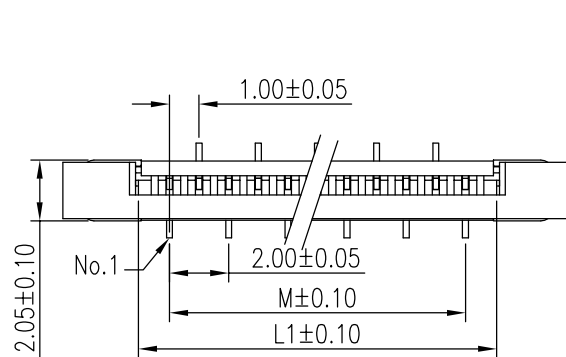

APPLICABLE FPC

Ordering Information

CFCC107 - XX XX A 001 C X A X

No. of Pins per Row
04~29

Standard Plating

02=Gold Flash

Selective Plating

01=Tin

05=Gold Flash /Tin

Color

E=Beige

...

Standard Packing

C=Tube

Selective Packing

D=Tape Reel

No. of PIN/ROW	Dimension Information		
	M	L1	L
04	3.00	5.10	10.20
05	4.00	6.10	11.20
06	5.00	7.10	12.20
07	6.00	8.10	13.20
08	7.00	9.10	14.20
09	8.00	10.10	15.20
10	9.00	11.10	16.20
11	10.00	12.10	17.20
12	11.00	13.10	18.20
13	12.00	14.10	19.20
14	13.00	15.10	20.20
15	14.00	16.10	21.20
16	15.00	17.10	22.20
17	16.00	18.10	23.20
18	17.00	19.10	24.20
19	18.00	20.10	25.20
20	19.00	21.10	26.20
21	20.00	22.10	27.20
22	21.00	23.10	28.20
23	22.00	24.10	29.20
24	23.00	25.10	30.20
25	24.00	26.10	31.20
26	25.00	27.10	32.20
27	26.00	28.10	33.20
28	27.00	29.10	34.20
29	28.00	30.10	35.20

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.* ± 1.5° X. ± 0.30

.X* ± 1.0° .X ± 0.20

.XX* ± 0.5° .XX ± 0.15

.XXX* ± 0.3° .XXX ± 0.10

DESIGN:

DATE:

CHECKED:

DATE:

AUDITED:

DATE:

DWG. NO.

CFCC107-CA1CA

PART NO.

CFCC107-XXXXA001CXAX

TITLE:

PITCH 1.00 FPC
 SMT TYPE

REV.	UNIT.	SCALE.	PAGE.	
03	mm	4:1	1/1	