



123456789

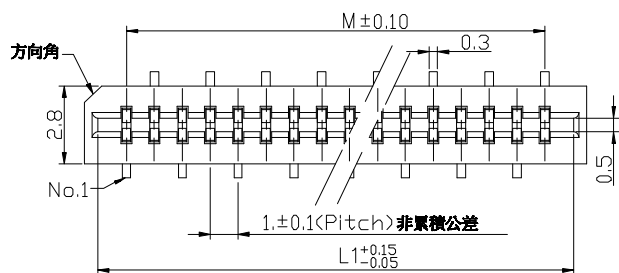

Specifications

Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 30mΩ Max.
Operating Temperature: -25~+85°



Voltage Rating: 50V AC/DC

Materials

Housing Material: High Temperature Thermoplastic,
UL 94V-0 NYLON 46 or the equivalent material.



Contact Material: Phosphor Bronze Tin Plated

All materials must meet Greenconn
requirement for environment protection

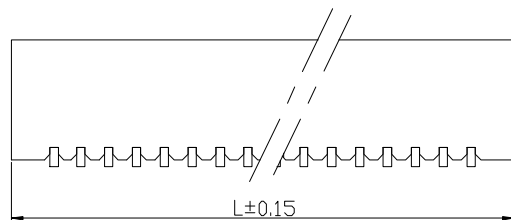

Ordering Information

C FCC119 - XX XX A 001 F X A X
No. of Pins per Row 04~40 Standard Plating 01=Tin Selective Plating 05=Gold Flash/Tin 02=Gold Flash
Color 1=BLACK Standard Packing C=Tube

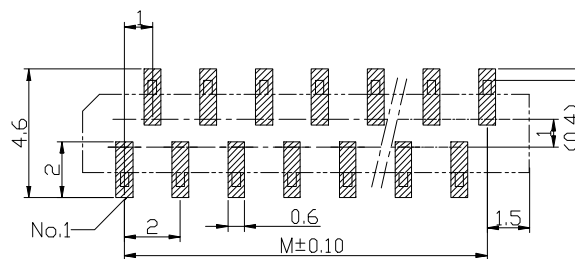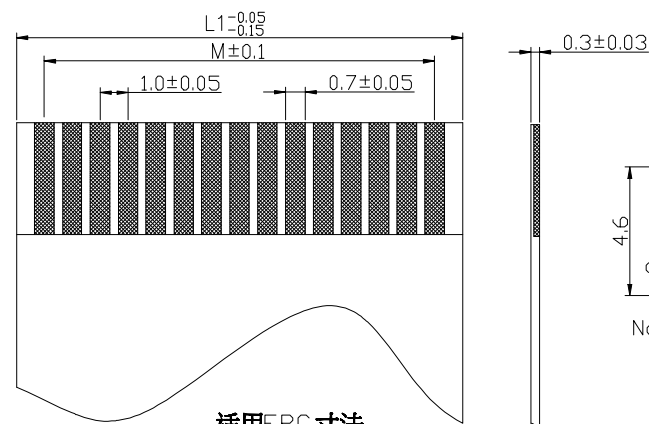

适用FPC寸法

APPLICABLE FPC

适用線路板

RECOMMENDED PCB LAYOUT

No. of PIN/ROW	Dimension Information			No. of PIN/ROW	Dimension Information		
	M	L1	L		M	L1	L
04	3.00	5.10	6.00	23	22.00	24.10	25.00
05	4.00	6.10	7.00	24	23.00	25.10	26.00
06	5.00	7.10	8.00	25	24.00	26.10	27.00
07	6.00	8.10	9.00	26	25.00	27.10	28.00
08	7.00	9.10	10.00	27	26.00	28.10	29.00
09	8.00	10.10	11.00	28	27.00	29.10	30.00
10	9.00	11.10	12.00	29	28.00	30.10	31.00
11	10.00	12.10	13.00	30	29.00	31.10	32.00
12	11.00	13.10	14.00	31	30.00	32.10	33.00
13	12.00	14.10	15.00	32	31.00	33.10	34.00
14	13.00	15.10	16.00	33	32.00	34.10	35.00
15	14.00	16.10	17.00	34	33.00	35.10	36.00
16	15.00	17.10	18.00	35	34.00	36.10	37.00
17	16.00	18.10	19.00	36	35.00	37.10	38.00
18	17.00	19.10	20.00	37	36.00	38.10	39.00
19	18.00	20.10	21.00	38	37.00	39.10	40.00
20	19.00	21.10	22.00	39	38.00	40.10	41.00
21	20.00	22.10	23.00	40	39.00	41.10	42.00
22	21.00	23.10	24.00				

A

格稜股份有限公司
Greenconn Corporation

REV. 02	UNIT. mm	SCALE. 4:1	PAGE. 1/1	
------------	-------------	---------------	--------------	--

GENERAL TOLERANCE

X.'±5.0'	X.±0.35
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGN:

DATE:

DWG. NO.

CFCC119-CA1FA

CHECKED:

DATE:

PART NO.

CFCC119-XXXXA001FXAX

AUDITED:

DATE:

TITLE.

1.0 Connector

123456789