

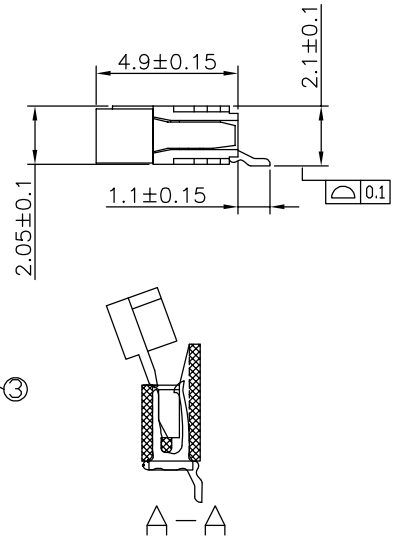
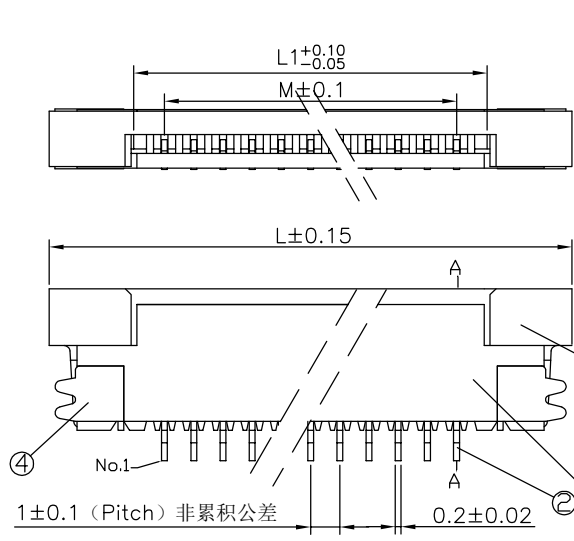


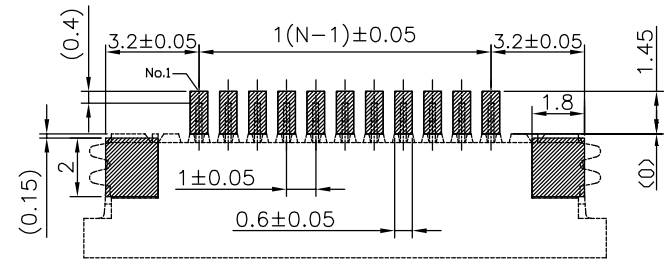

Specifications
Current Rating: 1.0Amp
Insulation Resistance: 500M Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 0.03 Max.
Operating Voltage: 50V AC/DC
Operating Temperature: -25°C to +85°C
Materials
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

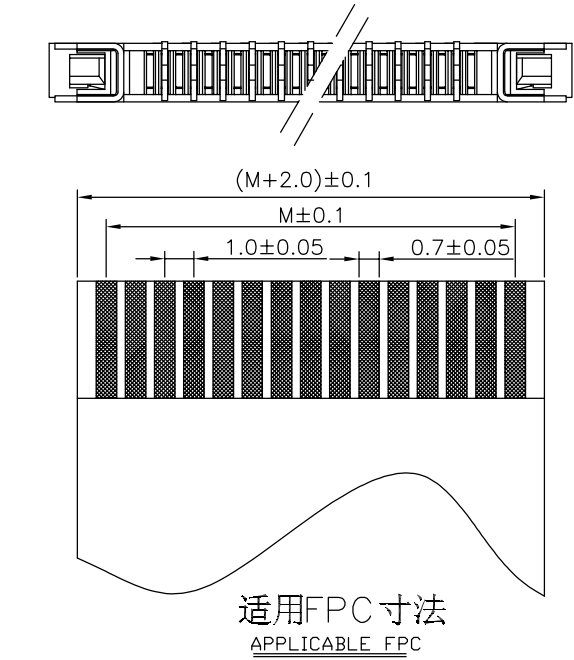

适用线路板
RECOMMENDED PCB LAYOUT

Ordering Information

CFCD108 - XX XX A 009 F X A X

No. of Pins per Row 02~19

Standard Plating
01=Tin
Selective Plating
22=Matte Tin

Color
2=White

Standard Packing
C=Tube
Selective Packing
A=Box

No. of PIN/ROW	Dimension Information		
	Dim.M	Dim.L1	Dim.L
02	1.00	3.06	8.20
03	2.00	4.06	9.20
04	3.00	5.06	10.20
05	4.00	6.06	11.20
06	5.00	7.06	12.20
07	6.00	8.10	13.20
08	7.00	9.06	14.20
09	8.00	10.06	15.20
10	9.00	11.06	16.20
11	10.00	12.06	17.20
12	11.00	13.06	18.20
13	12.00	14.06	19.20
14	13.00	15.06	20.20
15	14.00	16.06	21.20
16	15.00	17.06	22.20
17	16.00	18.06	23.20
18	17.00	19.06	24.20
19	18.00	20.06	25.20

适用FPC 寸法
APPLICABLE FPC

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±3°	X.±0.25
.X.*±0.5°	.X.±0.12
.XX.*±/'	.XX±0.05
.XXX.*±/'	.XXX±/'








DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO.	CFCD108-CA9FA
PART NO.	CFCD108-XXXXA009FXAX

TITLE.	1.0 FPC
--------	---------

F
E
D
C
B
A

F
E
D
C
B
A

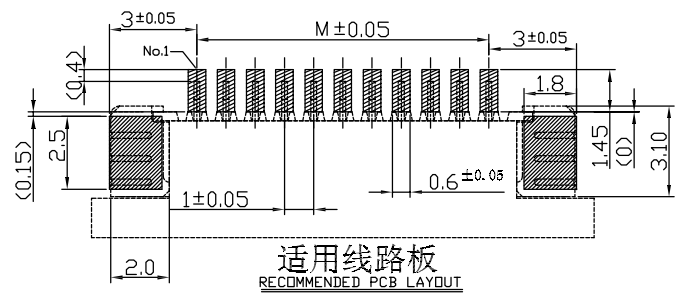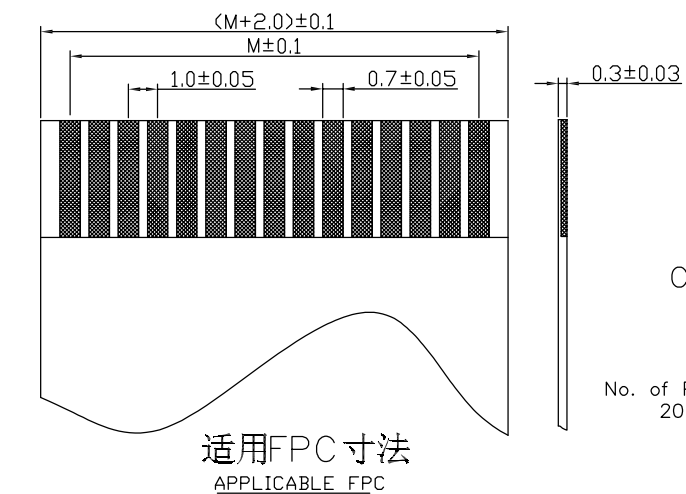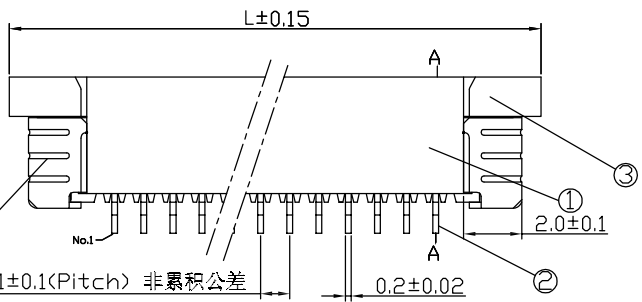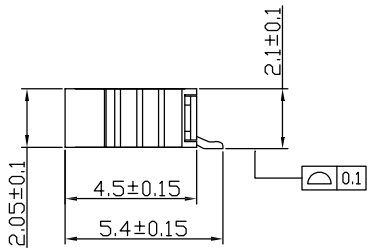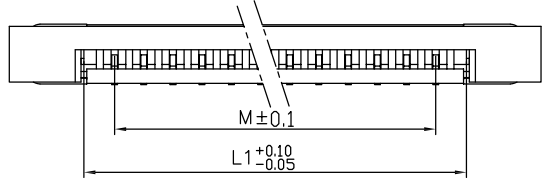

Specifications
Current Rating: 1.0Amp
Insulation Resistance: 500M Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 0.03 Max.
Operating Voltage: 50V AC/DC
Operating Temperature:-25°C to +85°C
Materials
Contact Material: Phosphor Bronze
Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

CFCD108 - XX XX A 009 F X A X
No. of Pins per Row 20~29
Standard Plating
01=Tin
Selective Plating
22=Matte Tin
Color
2=White
Standard Packing
C=Tube
Selective Packing
A=Box

No. of PIN/ROW	Dimension Information		
	Dim.M	Dim.L1	Dim.L
20	19.00	21.06	26.9
21	20.00	22.06	27.9
22	21.00	23.06	28.9
23	22.00	24.06	29.9
24	23.00	25.06	30.9
25	24.00	26.10	31.9
26	25.00	27.06	32.9
27	26.00	28.06	33.9
28	27.00	29.06	34.9
29	28.00	30.06	35.9

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±3°	X.±0.25
.X*±0.5°	.X±0.12
.XX*±/'	.XX±0.05
.XXX*±/'	.XXX±/'

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO.	CFCD108-CA9FA
PART NO.	CFCD108-XXXXA009FXAX

TITLE.	1.0 FPC
--------	---------