





Specifications

Insulation Resistance: 500MΩ Min.
Dielectric Withstanding: 500V AC
Contact Resistance: 0.05Ω Max.
Operating Temperature: -25°C to +85°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Thermoplastic
UL 94V-0 Nylon46 or the equivalent material
All materials must meet Greenconn requirement for environment protection

No. of PIN/ROW	Dimension Information		
	M	L1	L
04	3.00	5.10	6.00
05	4.00	6.10	7.00
06	5.00	7.10	8.00
07	6.00	8.10	9.00
08	7.00	9.10	10.00
09	8.00	10.10	11.00
10	9.00	11.10	12.00
11	10.00	12.10	13.00
12	11.00	13.10	14.00
13	12.00	14.10	15.00
14	13.00	15.10	16.00
15	14.00	16.10	17.00
16	15.00	17.10	18.00
17	16.00	18.10	19.00
18	17.00	19.10	20.00
19	18.00	20.10	21.00
20	19.00	21.10	22.00
21	20.00	22.10	23.00
22	21.00	23.10	24.00
23	22.00	24.10	25.00
24	23.00	25.10	26.00
25	24.00	26.10	27.00
26	25.00	27.10	28.00
27	26.00	28.10	29.00
28	27.00	29.10	30.00
29	28.00	30.10	31.00
30	29.00	31.10	32.00
31	30.00	32.10	33.00
32	31.00	33.10	34.00
33	32.00	34.10	35.00
34	33.00	35.10	36.00
35	34.00	36.10	37.00
36	35.00	37.10	38.00
37	36.00	38.10	39.00
38	37.00	39.10	40.00
39	38.00	40.10	41.00
40	39.00	41.10	42.00

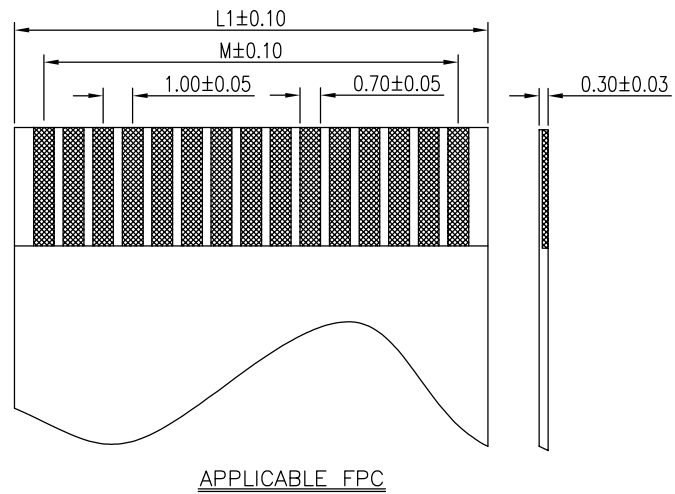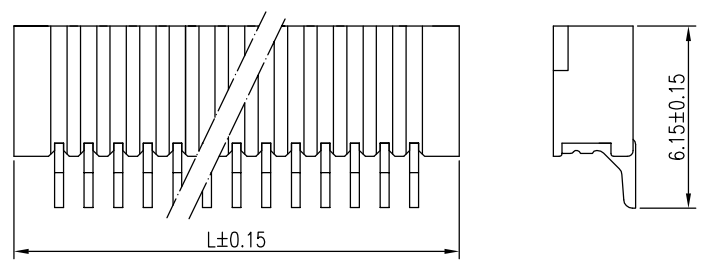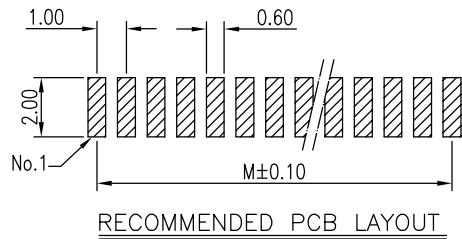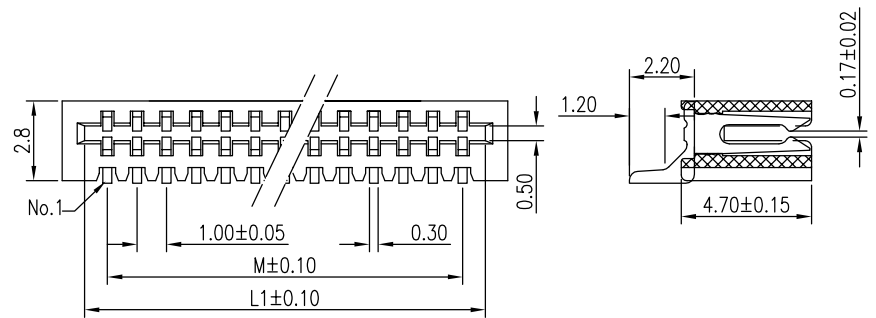

Ordering Information

CFCD112 - XX XX A 001 F X A X

No. of Pins per Row 04~40

Standard Plating 02=Gold Flash
Selective Plating 01=Tin
05=Gold Flash /Tin

Color 1=Black

Standard Packing C=Tube
Selective Packing D=Tape Reel

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.* ± 5.0°	X. ± 0.30
.X* ± 3.0°	.X ± 0.25
.XX* ± 2.0°	.XX ± 0.15
.XXX* ± 1.0°	.XXX ± 0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO. CFCD112-CA1FA
PART NO. CFCD112-XXXXA001FXAX

TITLE. PITCH 1.00mm FPC SMT TYPE
--

REV. 04	UNIT. mm	SCALE. 1:1	PAGE. 1/1	
------------	-------------	---------------	--------------	--