

1 2 3 4 5 6 7 8 9

F

F

E

E

D

D

C


C

B


B

A

A

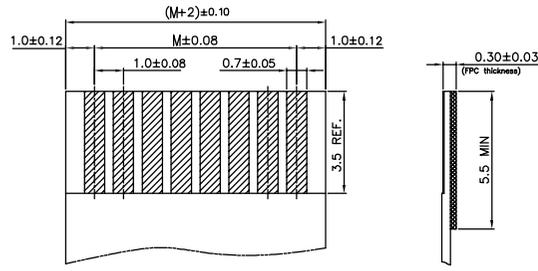

适用FPC寸法
APPLICABLE FPC

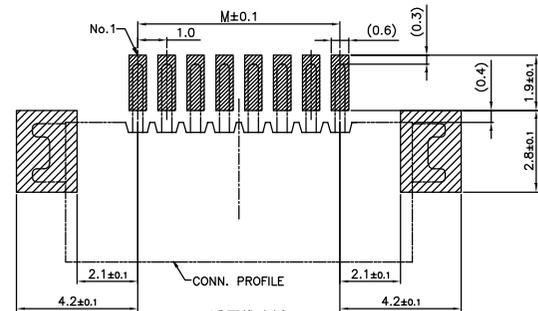

适用线路板
RECOMMENDED PCB LAYOUT






TABLE:

No. of Contacts	Dimension Information		
	M	L1	L
05	4.00	6.05	9.00
06	5.00	7.05	10.00
08	7.00	9.05	12.00
17	16.00	18.05	21.00
30	29.00	31.05	34.00



NOTES:

RATING
 OPERATING TEMPERATURE: -25~85°C
 OPERATING VOLTAGE: 125V AC/DC
 CURRENT RATING: 0.5 AMPS
 DIELECTRIC WITHSTANDING VOLTAGE:
 500V AC/Minute;
 INSULATION RESISTANCE: 100MΩ Min;
 CONTACT RESISTANCE: 0.03Ω Max;

MATERIAL;
 CONTACT MATERIAL: PHOSPHOR BRONZE
 FITTING NAIL: PHOSPHOR BRONZE
 HOUSING MATERIAL: PA6T UL94V-0

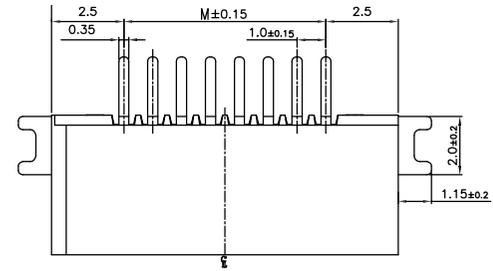

SECTION A-A

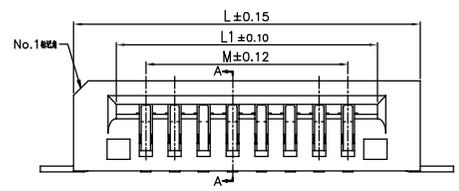

Ordering Information

CFCD114 - XX XX A 020 B X A X

No. of Pins per Row SEE TABLE
 Standard Plating 02=Gold Flash
 Selective Plating 01=Tin 05=Gold Flash /Tin
 Color 1=Black 2=White
 Standard Packing D=Tape Reel

3RD. ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0'	X.±/
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.10

DESIGNED: _____ DATE: _____
 CHECKED: _____ DATE: _____
 APPROVED: _____ DATE: _____

DWG. NO. CFCD114-CA020
 PART NO. CFCD114-XXXXA020BXAX

TITLE. 1.0 FPC CONN. NON ZIP SMT H=3.1 LOWER CONTACT

1 2 3 4 5 6 7 8 9