

F

E

D

C

B

A

F


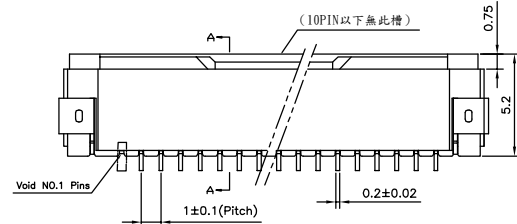
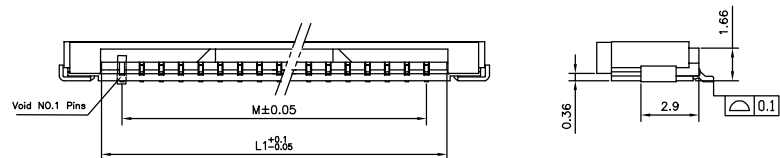
E

D

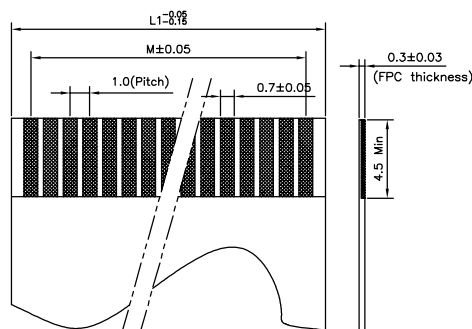
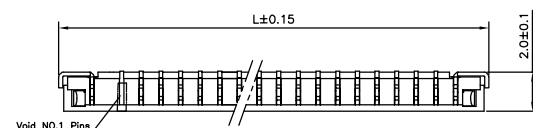

C

B

A



SECTION A-A

適用FPC寸法
Applicable FPC

Ordering Information

C FCD150 - XX XX A 650 X X A X

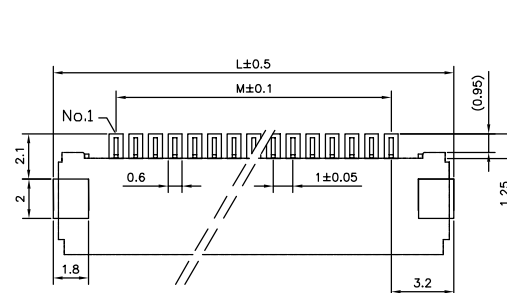
No. of Pins per Row
02~29

Selective Plating
01=Tin

Housing
D=Nylon 9T 含齒
J=Nylon 9T 無齒

Color
2=White

Standard Packing
C=Tube
Selective Packing
D=T&R

適用線路板
Recommended PCB Layout

Specifications

Voltage Rating:50V AC/DC
Contact Resistance:30 mΩ Max
Insulation Resistance: 500MΩ Min.
Dielectric Withstanding Voltage: 500V,AC/Minute
Temperature Range:-25°C~+85°C

Materials

Contact: Phosphor Bronze
Insulation: High Temperature Thermoplastic
UL 94V-0 PA9T or the equivalent material
Actuafor:PPS(UL94V-0)

All materials must meet Greenconn
requirement for environment protection

No. of Contact	Dimension Information		
	M	L1	L
02	1.00	3.10	7.40
03	2.00	4.10	8.40
04	3.00	5.10	9.40
05	4.00	6.10	10.40
06	5.00	7.10	11.40
07	6.00	8.10	12.40
08	7.00	9.10	13.40
09	8.00	10.10	14.40
10	9.00	11.10	15.40
11	10.00	12.10	16.40
12	11.00	13.10	17.40
13	12.00	14.10	18.40
14	13.00	15.10	19.40
15	14.00	16.10	20.40
16	15.00	17.10	21.40
17	16.00	18.10	22.40
18	17.00	19.10	23.40
19	18.00	20.10	24.40
20	19.00	21.10	25.40
21	20.00	22.10	26.40
22	21.00	23.10	27.40
23	22.00	24.10	28.40
24	23.00	25.10	29.40
25	24.00	26.10	30.40
26	25.00	27.10	31.40
27	26.00	28.10	32.40
28	27.00	29.10	33.40
29	28.00	30.10	34.40

格菱股份有限公司
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.	
A	mm	5:1	1/1	

GENERAL TOLERANCE	
X.*±5.0°	X.±0.38
.X*±3.0°	.X±0.30
.XX*±2.0°	.XX±0.25
.XXX*±1.0°	.XXX±0.20

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:

DWG. NO.	CFCD150-CA650XA
PART NO.	CFCD150-XXXX A650XXAX

TITLE.	1.0mm Pitch FPC (30P以下)
--------	-------------------------

1

2

3

4

5

6

7

8

9