
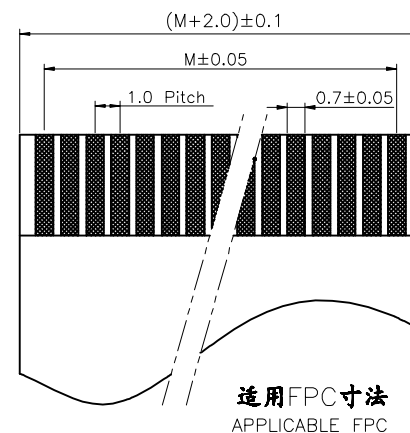
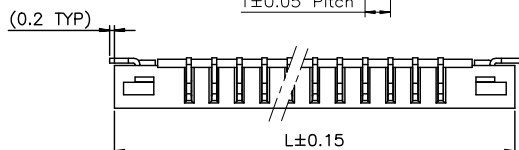

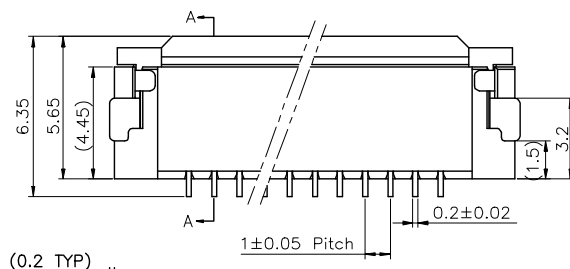
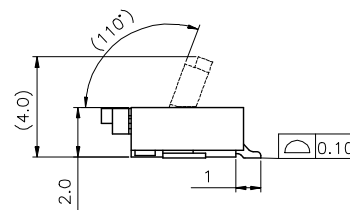
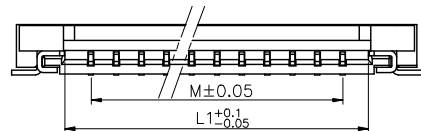
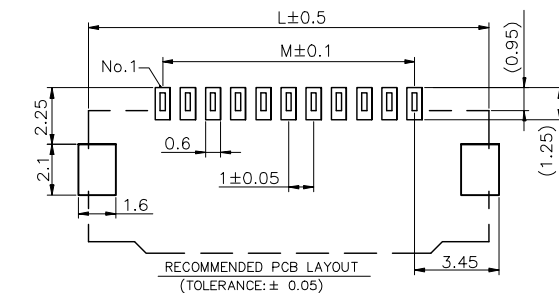


TABLE:

No. of PIN/ROW	M	L1	L
05	4.00	6.06	9.90
06	5.00	7.06	10.90
07	6.00	8.06	11.90
08	7.00	9.06	12.90
10	9.00	11.06	14.90
12	11.00	13.06	16.90
16	15.00	17.06	20.90
20	19.00	21.06	24.90
22	21.00	23.06	26.90
25	24.00	26.06	29.90
28	27.00	29.06	32.90
32	31.00	33.06	36.90

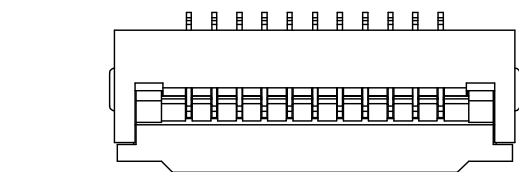

Specifications

Operating Voltage: 50V AC/DC

Current Rating: 1.0 Amps

Dielectric Withstanding Voltage: 500V AC/Minute;

Insulation Resistance: 500MΩ Min

Contact Resistance: 0.03Ω Max

Operating Temperature: -20°C ~ +85°C

Materials

Housing: LCP UL94V-0

Actuator: LCP UL94V-0

Contact: Phosphor Bronze

All materials must meet GREENCONN

hazardous substances control standards.

Ordering Information

C FCD155 - XX XX A 001 C X S X

No. of Pins per Row
SEE TABLEStandard Plating
01=TinColor
2=WhiteStandard Packing
D=Tape&ReelSelective Plating
02=Gold Flash

REV. 02 UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X'±5.0' X±0.30

.X'±3.0' .X±0.25

.XX'±2.0' .XX±0.12

.XXX'±1.0' .XXX±0.05

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CFCD155-CA1CS

PART NO.

CFCD155-XXXXA001CXSX

TITLE.

1.0mm FPC 掀蓋下接式