

F

E

D

C

B

A

F



E

D





C

B

A

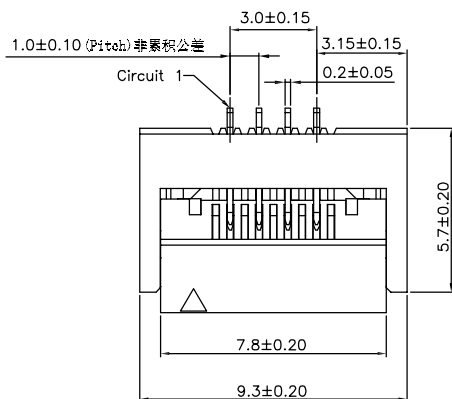


SECTION A-A

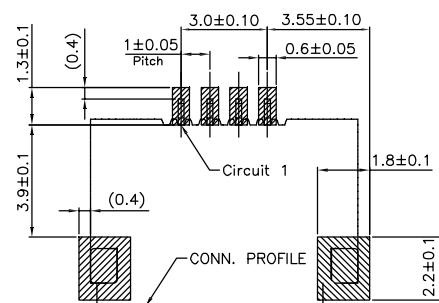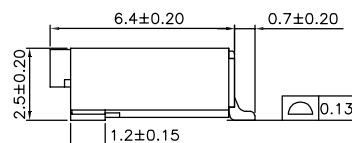

NOTES:


- MATERIAL:
 - 1-1. INSULATION MATERIAL: LCP (UL94V-0)
 - 1-2. CONTACT MATERIAL: PHOSPHOR BRONZE
 - 1-3. FITTING NAIL MATERIAL: PHOSPHOR BRONZE
 - 1-4. ACTUATOR MATERIAL: LCP (UL94V-0)
- PLATING: SEE PART NUMBER
- RATING:
 - 3-1. OPERATING TEMPERATURE: -40~105°C
 - 3-2. OPERATING VOLTAGE: 100V AC/DC
 - 3-3. CURRENT RATING: 0.5 AMPS
 - 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
 - 3-5. INSULATION RESISTANCE: 500MΩ Min;
 - 3-6. CONTACT RESISTANCE: 0.03Ω Max;

All materials must meet Greenconn requirement for environment protection



适用FPC寸法

APPLICABLE FPC

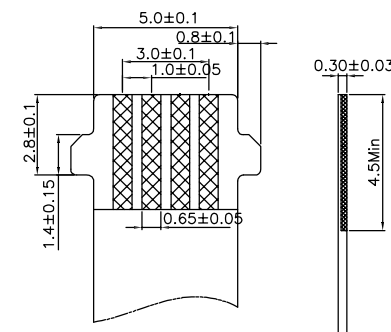

适用FPC寸法(带勾)

APPLICABLE FPC(+LOCK)

Ordering Information

C FCD163 - 04

XX

A

001

C

X

S

X

Standard Plating
09=Gold 3u"/Gold Flash
Selective Plating
02=Gold Flash

Color
1=Black
2=White


Standard Packing
D=Tape&Reel



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD. ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.20
.XXX*±/	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CFCD163-CA001

PART NO.

CFCD163-04XXA001CXSX

TITLE.

1.00 FPC CONNECTOR SMT
FRONTFLIP H=2.5 LOWER
CONTACT