
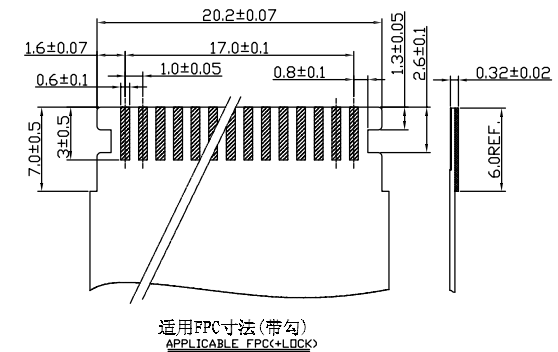



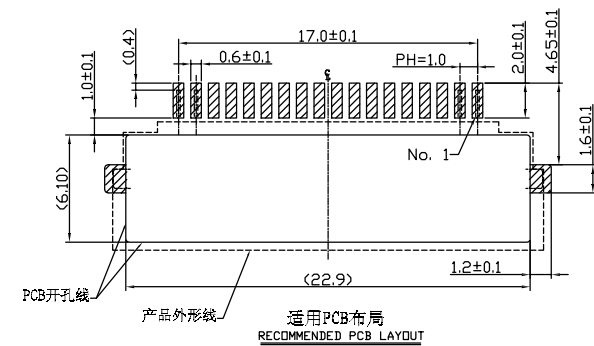

NOTES:

RATING
OPERATING TEMPERATURE: -40~105°C
OPERATING VOLTAGE: 125V AC/DC
CURRENT RATING: 1.0 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/Minute;
INSULATION RESISTANCE: 100MΩ Min;
CONTACT RESISTANCE: 0.03Ω Max;

MATERIAL;
CONTACT MATERIAL: PHOSPHOR BRONZE
FITTING NAIL: PHOSPHOR BRONZE
HOUSING MATERIAL: LCP UL94V-0
CAP MATERIAL: LCP UL94V-0
ACTUATOR MATERIAL: LCP UL94V-0

Ordering Information

CFCD164 - 18 XX A 001 C X A X

No. of Pins per Row
18

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash

Color
1=Black
2=White


Standard Packing
D=Tape Reel



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG
PROJ.



PAGE. 1 / 1

GENERAL TOLERANCE

$$X.\pm 5.0^{\circ}$$
$$.X^{\circ} \pm 3.0^{\circ}$$
$$.XX^{\circ} \pm 2.0^{\circ}$$
$$XXX^{\circ} \pm 1.0^{\circ}$$
 $X, \pm /$

	$X \pm 0.2$
--	-------------

	.XX±0.2
--	---------

.XXX±0.1

~~DESIGNED:~~

DATE:

CHECKED:

DATE:

~~APPROVED:~~

DATE:

DWG. NO.

CFCD164-CA001

PART NO.

CFCD164-18XXA001CXAX

TITLE.

1. 0 FPC CONN. ZIF SMT BACKFLIP E=5.9 DOUBLE LOWER CONTACT