





适用PCB布局
RECOMMENDED PCB LAYOUT



开合状态

NOTES:
RATING
OPERATING TEMPERATURE:-40~85°C
OPERATING VOLTAGE: 125V AC/DC
CURRENT RATING: 0.5 AMPS
DIELECTRIC WITHSTANDING VOLTAGE:
500V AC/Minute;
INSULATION RESISTANCE:500MΩ Min;
CONTACT RESISTANCE:0.03Ω Max;

MATERIAL;
CONTACT MATERIAL: PHOSPHOR BRONZE
FITTING NAIL: PHOSPHOR BRONZE
HOUSING MATERIAL: LCP UL94V-0
ACTUATOR MATERIAL: LCP UL94V-0

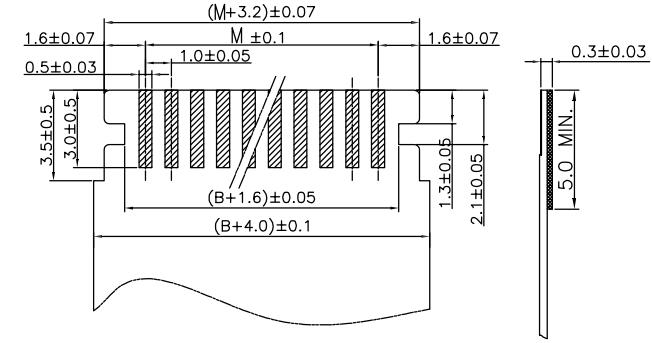

适用FPC寸法
APPLICABLE FPC

No. of Contacts	Dimension Information			
	L	M	L1	L2
06	10.50	5.00	8.26	10.30
08	12.50	7.00	10.26	12.30
10	14.50	9.00	12.26	14.30
15	19.50	14.00	17.26	19.30
20	24.50	19.00	22.26	24.30

Ordering Information

CFCD165 - XX XX A 001 C X A X

No. of Pins per Row SEE TABLE

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash /Tin

Color
1=Black
2=White

Standard Packing
D=Tape Reel



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.
A	mm	1:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0'	X.±/
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.20
.XXX'±1.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
CFCD165-CA001
PART NO.
CFCD165-XXXXA001CXAX

TITLE.
1.0 FPC CONN. ZIP SMT BACKFLIP H=2.7 DOUBLE LOWER CONTACT