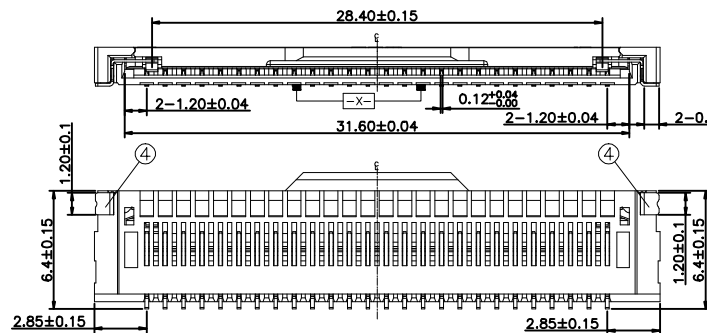
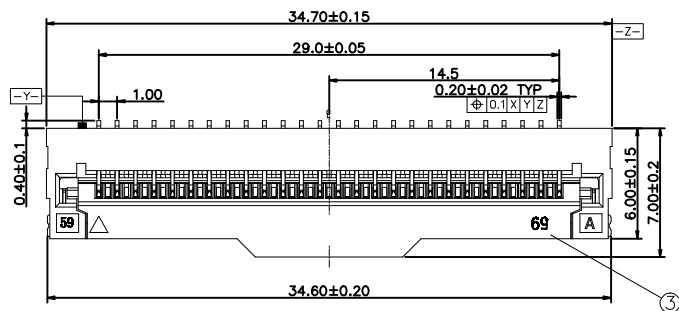


Specifications
 Current Rating:1Amp
 Insulation Resistance:500MΩ Min.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:0.03Ω Max.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:PHOSPHOR BRONZE
 Insulation Material:High Temperature
 Thermoplastic UL94V-0 LCP
 All materials must meet GREENCONN
 hazardous substances control standards.

Ordering Information

C FCD168 - XX XX A 001 C X A X

No. of Pins per Row 30
 Standard Plating
 01=Tin
 05=Gold Flash/Tin
 Color
 2=White
 Standard Packing
 C=Tube
 D=T&R

4	122-0122-001	菲 Fitting Nail	材料 Phosphor Bronze	2	规格 0.12±0.05mm MIN, 0.80±0.1mm MIN.
3	142-0122-100	菲 Actuator	PA9T(UL94V-0)	1	规格 1.00±0.1mm MIN.
2	112-0119-001	菲 Contact	材料 Phosphor Bronze	30	规格 0.12±0.05mm MIN, 0.80±0.1mm MIN, 0.80±0.1mm MIN.
1	122-0142-000	菲 Housing	LCP(UL94V-0)	1	规格 1.00±0.1mm MIN.
序号	图号	名称	材料	数量	备注



Website:www.greenconn.com
 E-mail:sales@greenconn.com

REV.	UNIT.	SCALE.	PAGE.
A	mm	1:1	1/1



GENERAL TOLERANCE

X'±3.0'	X.±/
.X'±0.5'	.X±0.25
.XX'±/	.XX±0.12
.XXX'±/	.XXX±0.05

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CFCD168-CA001CA

PART NO.

CFCD168-XXXX A001CXAX

TITLE.

1.0 FPC CONN.ZIF SMT
 FRONTFLIP H=2.1 DOUBLE
 LOWER CONTACT