

Ordering Information

C GAC201 - XX XX B 002 C 1 9 X


No. Of Pins Per Row

Standard Plating
02=Gold Flash
06=6u*Au/Gold Flash
09=3u*Au/Gold Flash

Color
1=Black

Standard Packing
H=Acetate tape+Tape&Reel

本國紙	80	46.40	44.50	38.50	28.50	42.60	42.00	47.20
本國紙	70	41.40	39.50	34.50	28.50	37.60	37.00	42.20
本國紙	60	36.40	34.50	29.50	28.50	32.60	32.00	37.20
本國紙	50	31.40	29.50	24.50	28.50	27.60	27.00	32.20
本國紙	40	26.40	24.50	19.50	11.00	22.60	22.00	27.20
本國紙	30	21.40	19.50	14.50	11.00	17.60	17.00	22.20
本國紙	20	16.40	14.50	9.50	11.00	12.60	12.00	17.20
本國紙	15	13.80	12.00	7.00	11.00	10.10	9.50	14.70
備注	No. of	A	B	C	D	E	F	G
	Pin/Row							

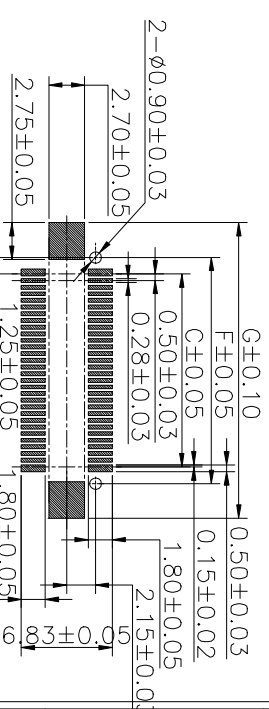

Specifications

Current Rating:0.4Amp

Insulation Resistance:100MΩMin.

Dielectric Withstanding Voltage:250VAC

Contact Resistance: 80mΩ Max.

Operating Temperature: -40°C to $+105^{\circ}\text{C}$

Materials

Contact Material:copper alloy

Insulator Material: High Temperature Thermoplastic,

UL 94V-0 LCP or the equivalent material

All materials must meet GREENCONN hazardous

☆ substances control standards.

★TM: Critical Characteristics.

indicates product characteristics, functionalities, and

manufacturing processes regarding to customer's

specifications

- ☆: Safety Features

indicates product characteristics, functionalities, and

manufacturing processes complying to legal

regulations stated by local government

Recommended P.C.Board Layout

(Tolerance: ± 0.05)

Greenpoint

 Website: www.greenconn.com E-moltsales@greenconn.com		 Website: www.greenconn.com E-moltsales@greenconn.com	
REV. A	UNIT. mm	SCALE. 2:1	PAGE. 1/1
 3RD. ANG PROJ.		 3RD. ANG PROJ.	
GENERAL TOLERANCE		GENERAL TOLERANCE	
X: $\pm 5.0^{\circ}$		X: $\pm 5.0^{\circ}$	
X: $\pm 3.0^{\circ}$		X: ± 0.35	
XX $\pm 2.0^{\circ}$		XX ± 0.20	
XXX $\pm 1.0^{\circ}$		XXX ± 0.10	
DESIGNED:		DESIGNED:	
CHECKED:		CHECKED:	
APPROVED:		APPROVED:	
DATE:		DATE:	
DATE:		DATE:	

DWG. NO.
CGAC201-CB002

DWG. NO.	TITLE.
CGAC201-CB002	0.5mm PITCH BTB FLOATING CONNECTOR
PART NO. CGAC201-XXXXB002C19X	