

1 2 3 4 5 6 7 8 9

F



E

D

C


B

A

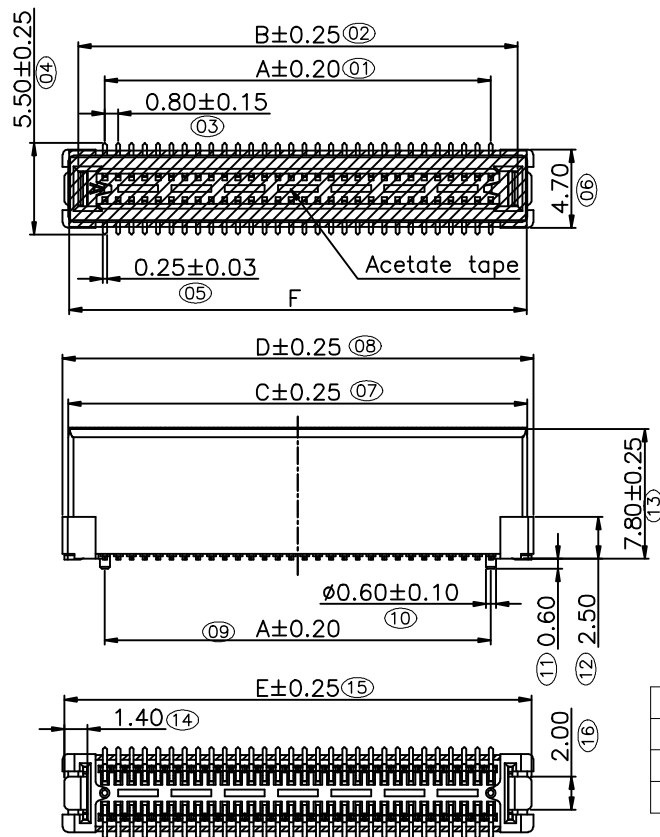

Pin NO.	A	B	C	D	E	F
2x5	3.20	6.40	7.60	8.30	8.10	7.50
2x30	23.20	26.40	27.60	28.30	28.10	27.50
2x40	31.20	34.40	35.60	36.30	36.10	35.50

Recommended P.C.Board
Layout
(Tolerance:±0.05)

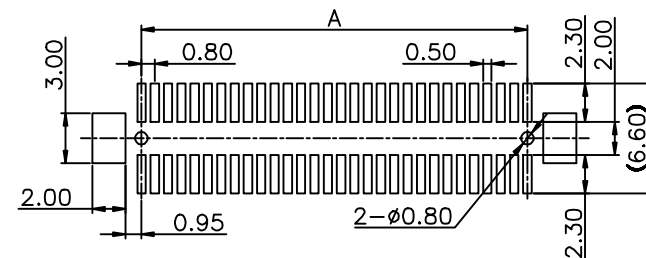

Ordering Information

C GBC201 - XX XX B 001 C 1 N H

No. Of Pins Per Row
5,30,40

Standard Plating
02=Gold Flash
Selective Plating
09=3u"AU/Gold Flash

Color
1=Black

Standard Packing
H=Acetate tape
+Tape&Reel



REV. 02 UNIT. mm SCALE. 3:1

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
CGBC201-CB1CN
PART NO.
CGBC201-XXXXB001C1NX

TITLE.
0.80mm PITCH BTB
FLOATING CONNECTOR

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A