
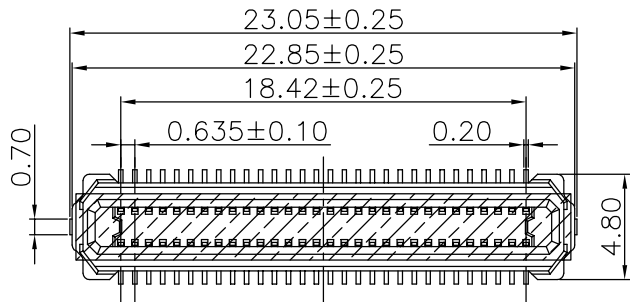
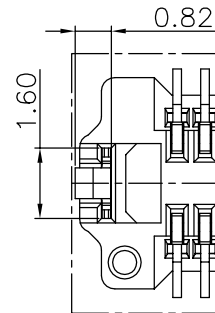
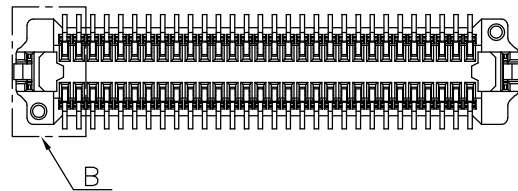




SECTION A-A

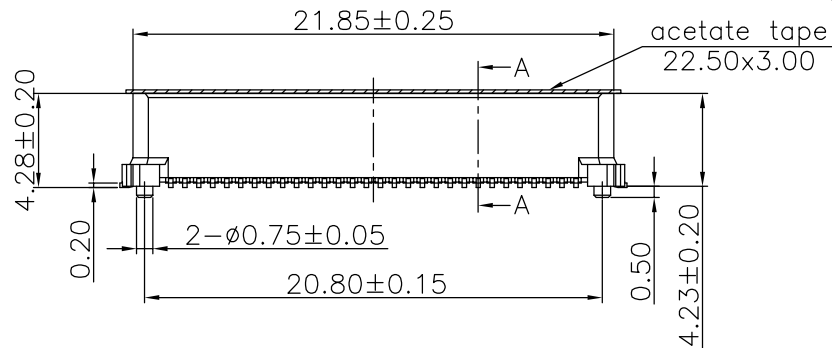

DETAIL B
2:1

Specifications
 Current Rating:0.5Amp
 Insulation Resistance:500MΩMin.
 Dielectric Withstanding Voltage:200VAC
 Contact Resistance:120mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 LCP or the
 equivalent material
 All materials must meet GREENCONN
 hazardous substances control standards.

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

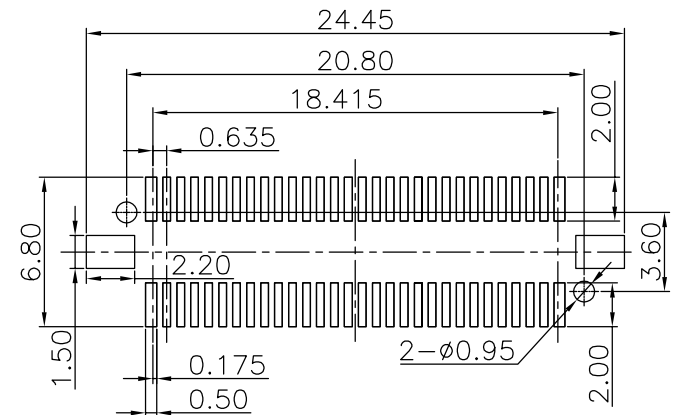

Ordering Information

C GZC201 - XX XX B 001 C 1 S X

No. Of Pins Per Row 30
 Standard Plating 02=Gold Flash
 09=3u"Au/Gold Flash
 Color 1=Black
 Standard Packing H=Acetate tape+Tape&Reel



3RD.ANG
 PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:
 CHECKED:
 APPROVED:

DATE:
 DATE:
 DATE:

DWG. NO.
 CGZC201-CB1CS
 PART NO.
 CGZC201-30XXB001C1SX

TITLE.
 0.635mm PITCH BTB
 FLOATING CONNECTOR