
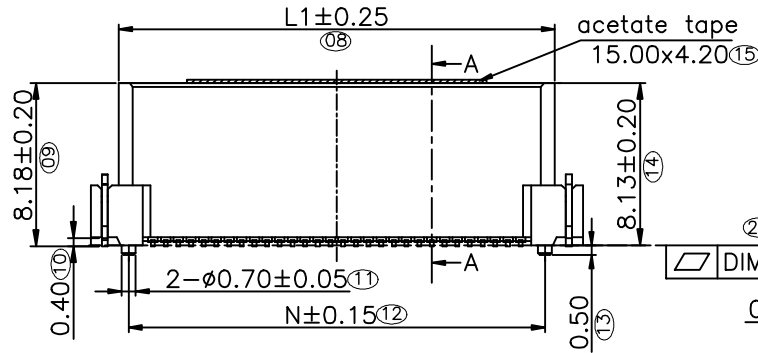

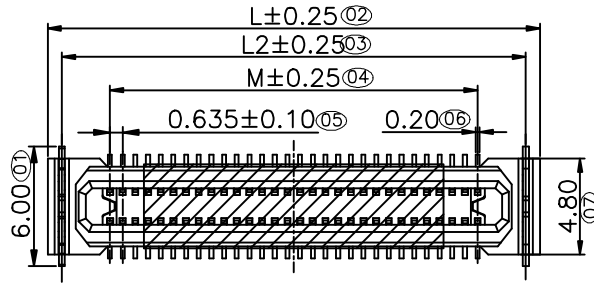


Specifications
 Current Rating:0.5Amp
 Insulation Resistance:500MΩMin.
 Dielectric Withstanding Voltage:200VAC
 Contact Resistance:100mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

備注	No. of PIN/ROW	Dimension Information					
		L	L2	M	L1	N	F
●同様	2x20	18.30	16.90	12.07	15.50	14.45	0.12
●同様	2x30	24.65	23.25	18.42	21.85	20.80	0.12
●同様	2x40	31.00	29.60	24.77	28.20	27.15	0.15

Recommended P.C.Board Layout
 (Tolerance:±0.05)

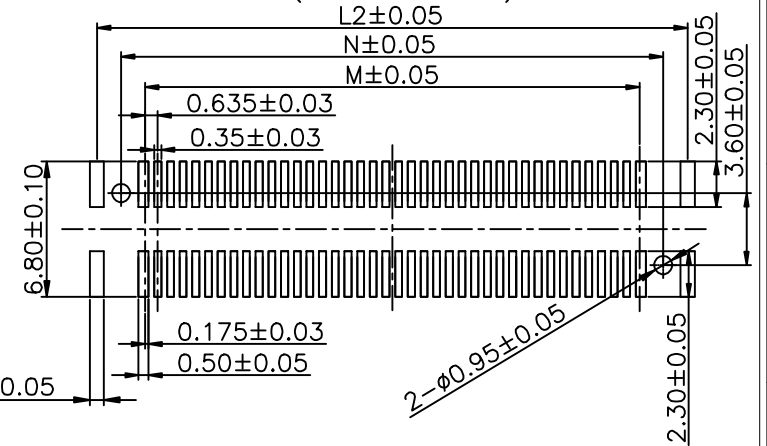

Ordering Information

C GZC202 - XX XX B 001 C 1 A X

No. Of Pins Per Row
20,30,40

Standard Plating

02=Gold Flash (All gold)

09=3u"AU/Gold Flash

J8=0.6u"AU/Gold Flash (Half-gold nickel)

Color
1=Black

Standard Packing
H=Acetate tape
+Tape&Reel



REV. 04 UNIT. mm SCALE. 3:1

3RD.ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X'±5.0'	X±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CGZC202-CB001

PART NO.

CGZC202-XXXXB001C1AX

TITLE.

0.635mm PITCH BTB
FLOATING CONNECTOR