

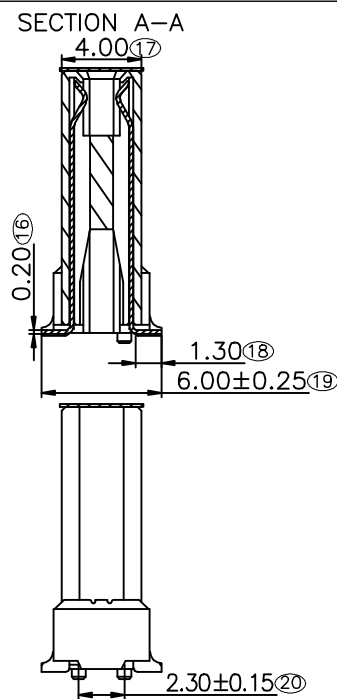
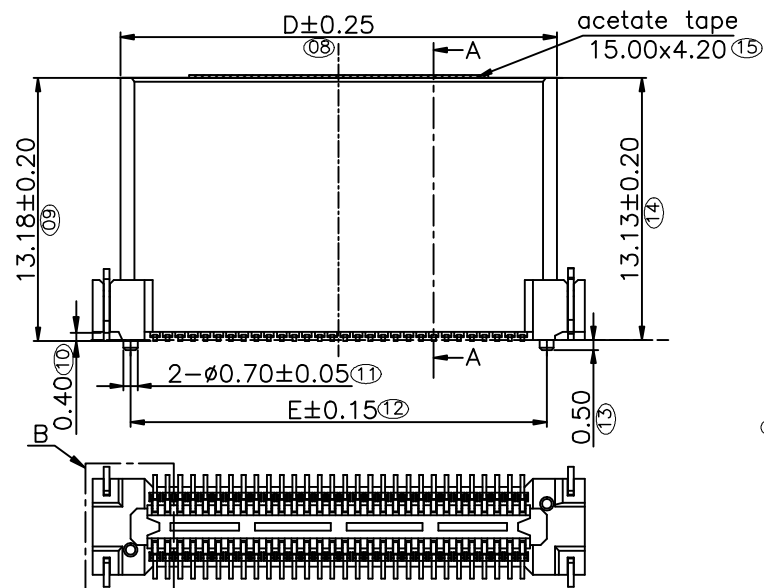
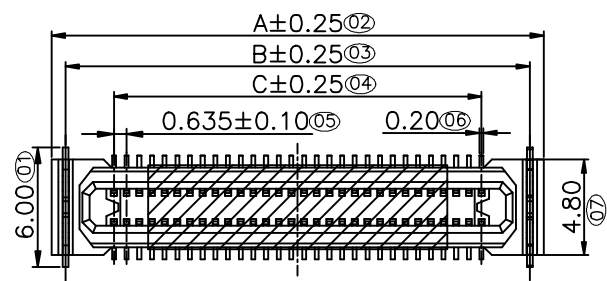


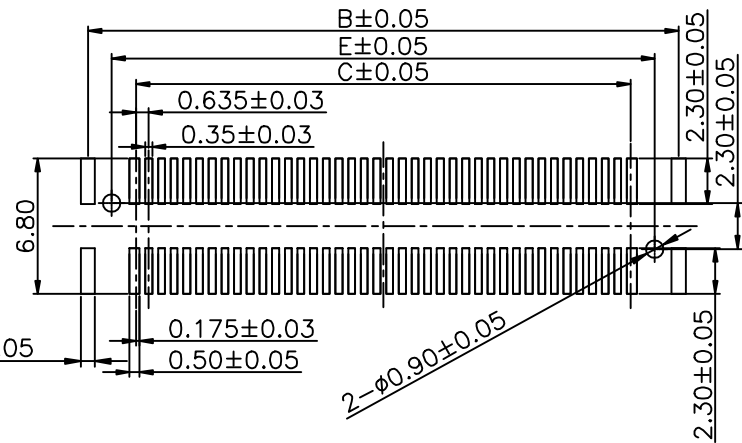

Specifications
 Current Rating: 0.5Amp
 Insulation Resistance: 500MΩMin.
 Dielectric Withstanding Voltage: 200VAC
 Contact Resistance: 100mΩMax.
 Operating Temperature: -40°C to +105°C
Materials
 Contact Material: Phosphor Bronze
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 All materials must meet GREENCONN hazardous substances control standards.

No. of PIN/ROW	Dimension Information				
	A	B	C	D	E
2x20	18.30	16.90	12.07	15.50	14.50
2x30	24.65	23.25	18.42	21.85	20.85
2x40	31.00	29.60	24.77	28.20	27.20

Recommended P.C.Board Layout
 (Tolerance: ± 0.05)



Ordering Information

C GZC203 - XX XX B 001 C 1
 No. Of Pins Per Row: 20, 30, 40
 Standard Plating: 02=Gold Flash, 09=3u"AU/Gold Flash
 Color: 1=Black
 Standard Packing: H=Acetate tape + Tape&Reel



REV.	UNIT.	SCALE.	PAGE.
02	mm	3:1	1/1

GENERAL TOLERANCE	
X' ± 5.0	X ± 0.30
.X' ± 3.0	.X ± 0.25
.XX' ± 2.0	.XX ± 0.15
.XXX' ± 1.0	.XXX ± 0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	CGZC203-CB001
PART NO.	CGZC203-XXXXB001C1AX

TITLE.
 0.635mm PITCH BTB FLOATING CONNECTOR