

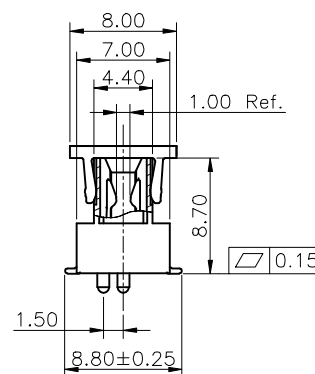


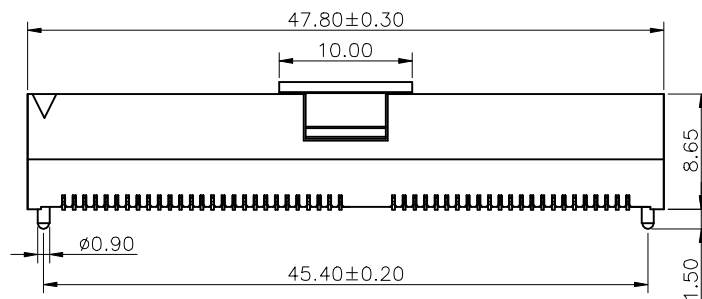

Recommended P.C.Board
Layout
(Tolerance: ± 0.05)

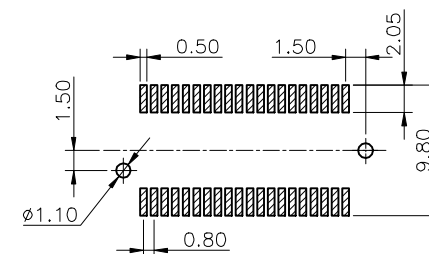

C LBC203 - 50 XX B XXX C 1 A X
 Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple
 Water code
 No. of Pins per Row
 50
 Positioning column information
 B=Round post
 Plating code
 02=Gold Flash
 05=Gold Flash/Tin
 38=Gold 10u"/Matte Tin 100u"
 Pin length
 See the drawing
 Insulator Material
 C=LCP
 Color
 1=Black
 2=White
 3=Yellow
 E=Beige
 Contact Material
 A/S/K/T=Phosphor Bronze
 Packing code
 C=Tube
 D=Tape&Reel
 E=Cap+Tube
 F=Cap+Tape&Reel

格稜股份有限公司
Greenconn Corporation

格稜股份有限公司 Greenconn Corporation					GENERAL TOLERANCE X: $\pm 5.0'$ X: ± 0.30 .X: $\pm 3.0'$.X: ± 0.25 .XX: $\pm 2.0'$.XX: ± 0.15 .XXX: $\pm 1.0'$.XXX: ± 0.10		DESIGNED: CHECKED: CO SIGEND: APPROVED:		DATE: DATE: DATE: DATE:		DWG. NO. CLBC203-CBXX PART NO. CLBC203-50XX BXXX C1AX		TITLE. 0.8mm PITCH PCI SMT TYPE	
REV.	01	UNIT.	mm	SCALE.	2:1	PAGE.	1/1							