

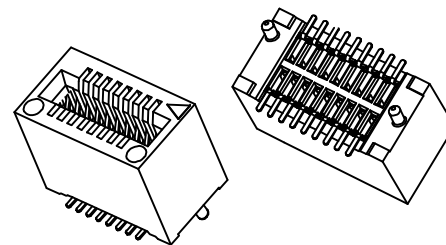
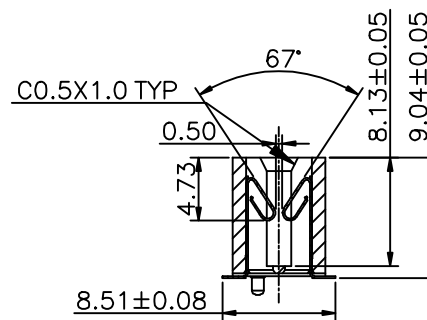


8PIN

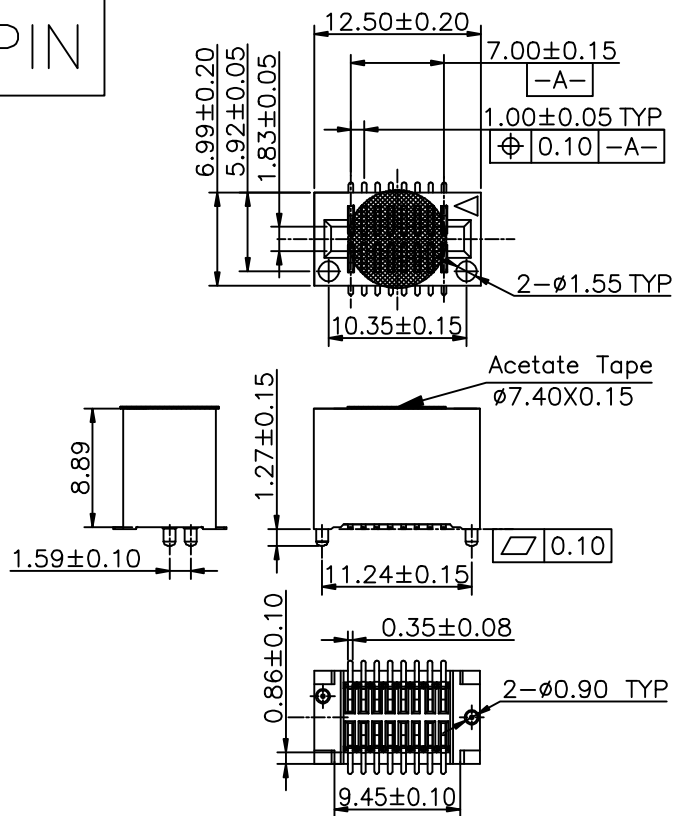

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 LCP
or the equivalent material
All materials must meet GREENCONN
hazardous substances control standards.

Recommended P.C.Board
Layout
(Tolerance:±0.05)

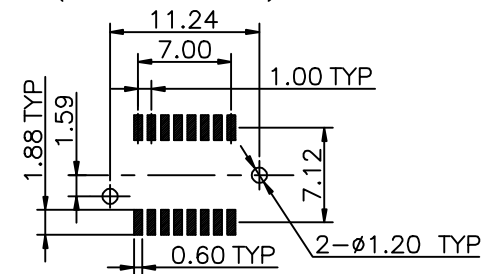

Ordering Information

C SCC215 - 08 XX

B

001

C

1

A

X

No. of Pins per Row
08

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin
45=10u" Gold on conatct point ,
Matte Tin on tail(Matte Tin 80~160u")

Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=Box
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel
D=Tape&Reel

格稜股份有限公司
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.
01	mm	2:1	1/1


GENERAL TOLERANCE	
X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.
CSCC215-CB1CA
PART NO.
CSCC215-08XX B001C1AX


TITLE.
1.00 FEMALE HEADER
DAUL ROWS SMT TYPE
CONNECTOR

20PIN

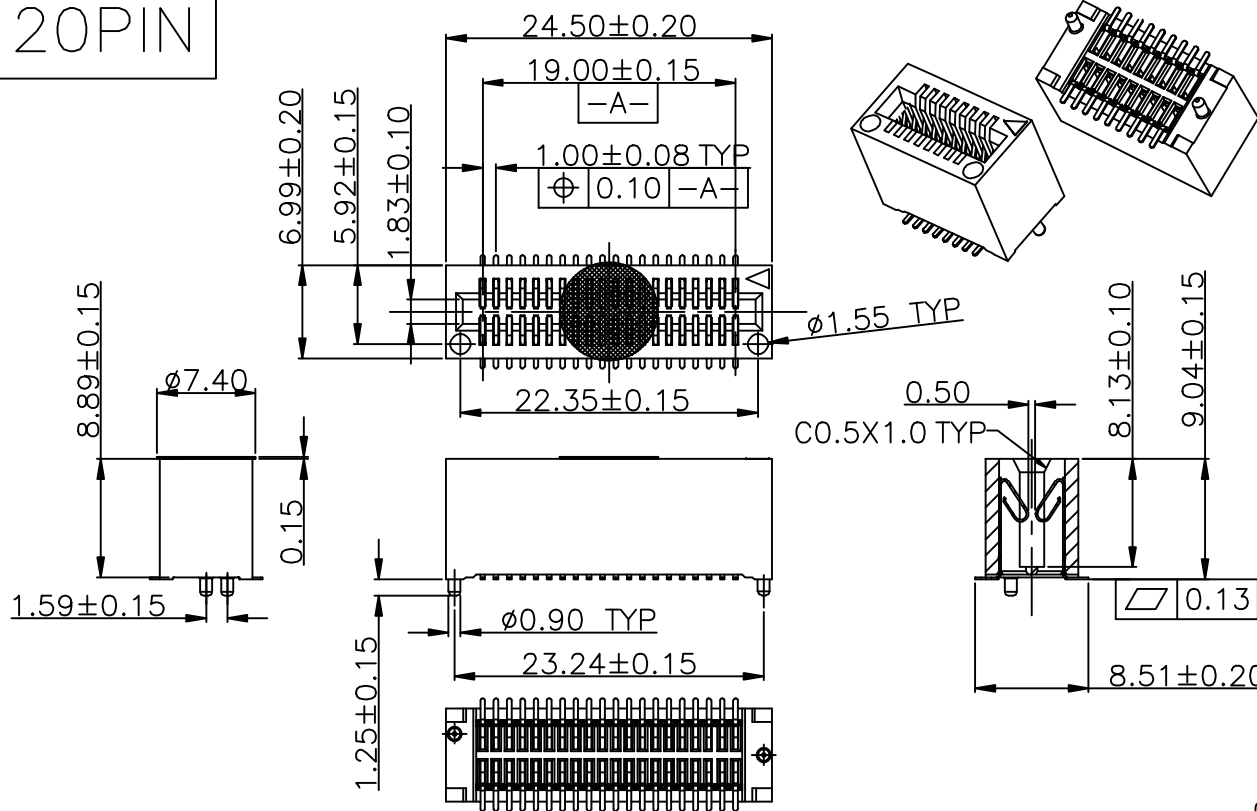

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 LCP
or the equivalent material
All materials must meet GREENCONN
hazardous substances control standards.

Recommended P.C.Board
Layout
(Tolerance:±0.05)

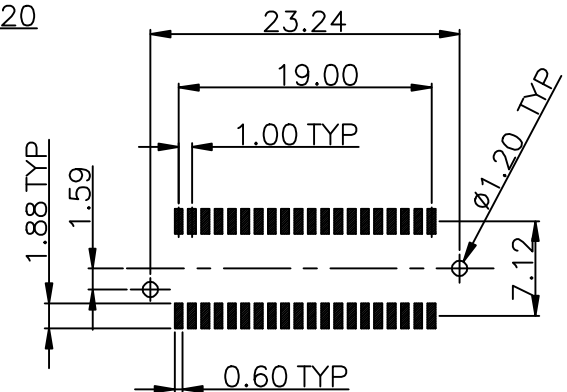

Ordering Information

C SCC215 - 20 XX B 001 C 1 A X

No. of Pins per Row
20

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin
45=10u" Gold on contact point,
Matte Tin on tail(Matte Tin 80~160u")

Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=Box
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel
D=Tape&Reel

格菱股份有限公司
Greenconn Corporation

REV. 01 UNIT. mm SCALE. 2:1 PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

CSCC215-CB1CA

TITLE.

1.00 FEMALE HEADER
DAUL ROWS SMT TYPE
CONNECTOR

CHECKED:

DATE:

PART NO.

CSCC215-20XX B001C1AX


CO SIGNED:

DATE:




APPROVED:

DATE:


30PIN

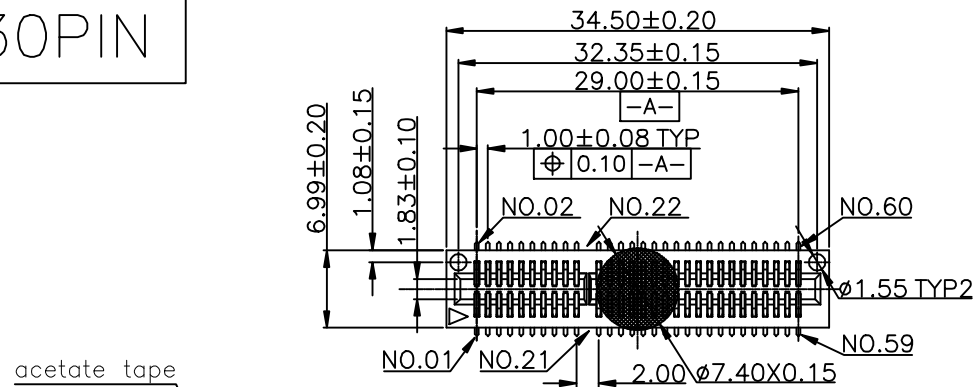

acetate tape
 $\phi 7.40 \times 0.15$

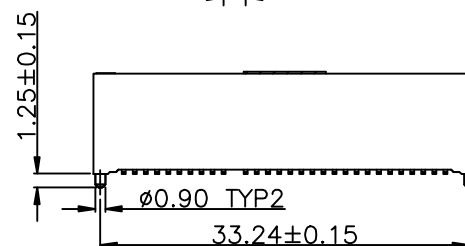

SECTION A-A

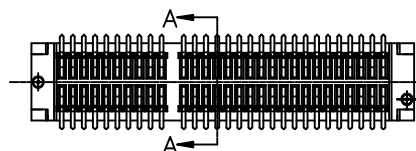

Ordering Information

C SCC215 - 30 XX B 001 C X S X

No. of Pins per Row
30


Standard Plating
01=Tin
Selective Plating
45=10u"Au/80u"~160u"Matte Tin

Color
1=Black

Standard Packing
C=Tube
Selective Packing
G=acetate tape +Tube
H=acetate tape +Tape&Reel

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

Recommended P.C.Board
Layout
(Tolerance:±0.05)

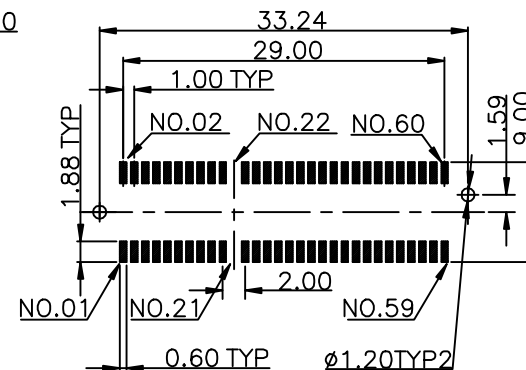

格菱股份有限公司
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.	
01	mm	5:3	1/1	

GENERAL TOLERANCE	
X.'±3.0'	X.±0.25
.X'±2.0'	.X±0.20
.XX'±1.0'	.XX±0.13
.XXX'±0.5'	.XXX±0.08

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.
CSCC215-CB1CS
PART NO.
CSCC215-30XXB001C1SX

TITLE.
Pitch 1.00 Fmale Connector
MINI PCI 30PIN SMT
TYPE

F



C

B

No. of Pins per Row
49

Color
1=Black

B



A

1