


Specifications
Current Rating:1Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 LCP or the
equivalent material
All materials must meet Greenconn
requirement for environment protection.

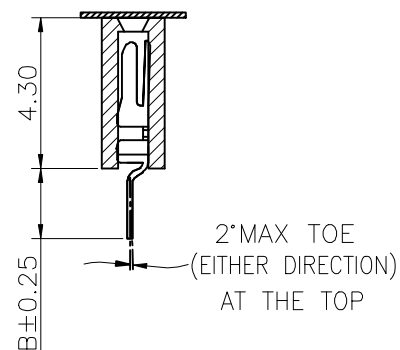

No. of PIN/ROW	Dimension Information	
	A	B
02	1.27	2.89
03	2.54	4.16
04	3.81	5.43
05	5.08	6.70
06	6.35	7.97
07	7.62	9.24
08	8.89	10.51
09	10.16	11.78
10	11.43	13.05
11	12.70	14.32
12	13.97	15.59
13	15.24	16.86
14	16.51	18.13
15	17.78	19.40
16	19.05	20.67
17	20.32	21.94
18	21.59	23.21
19	22.86	24.48
20	24.13	25.75
21	25.40	27.02
22	26.67	28.29
23	27.94	29.56
24	29.21	30.83
25	30.48	32.10
26	31.75	33.37
27	33.02	34.64
28	34.29	35.91
29	35.56	37.18
30	36.83	38.45
31	38.10	39.72
32	39.37	40.99
33	40.64	42.26
34	41.91	43.53
35	43.18	44.80
36	44.45	46.07
37	45.72	47.34
38	46.99	48.61
39	48.26	49.88
40	49.53	51.15

Ordering Information

C SEA102 - XX XX A XXX C
 Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple
 Water code
 No. of Pins per Row
 02~40
 Positioning column information
 A=No locating post
 B=Round post
 C=Square post
 Pin length
 See the drawing
 Insulator Material
 C=LCP
 Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

1
├── Color
│ 1=Black
│ 2=White
│ 3=Yellow
│ E=Beige
├── A
│ ├── Contact
│ │ A/S/K/T=Phosphor Bronze
│ └── Material
└── X
 ├── Packing code
 │ C=Tube
 │ D=Tape&Reel
 │ E=Cap+Tube
 │ F=Cap+Tape&Reel
 │ G=Acetate Tape+Tube
 │ H=Acetate Tape+Tape&Reel

格稜股份有限公司
Greenconn Corporation

格菱股份有限公司 Greenconn Corporation					GENERAL TOLERANCE X.±5.0'X.±0.30 .X'±3.0'.X±0.25 .XX'±2.0'.XX±0.15 .XXX'±1.0'.XXX±0.10		DESIGN: CHECKED: AUDITED: APPROVED:		DATE: DATE: DATE: DATE:		DWG. NO. CSEA102-CAXX PART NO. CSEA102-XXXX AXXXC1AX		TITLE. 1.27 FEMALE HEADER SINGLE ROW DIP TYPE	
REV.	UNIT.	SCALE.	PAGE.											
01	mm	3:1	1/1											

1.27 FEMALE HEADER
SINGLE ROW DIP TYPE