

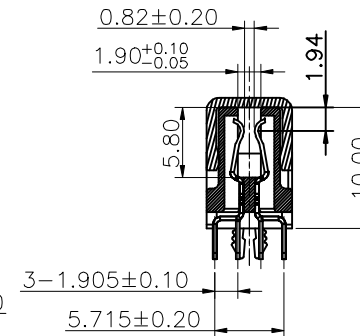


20Pin

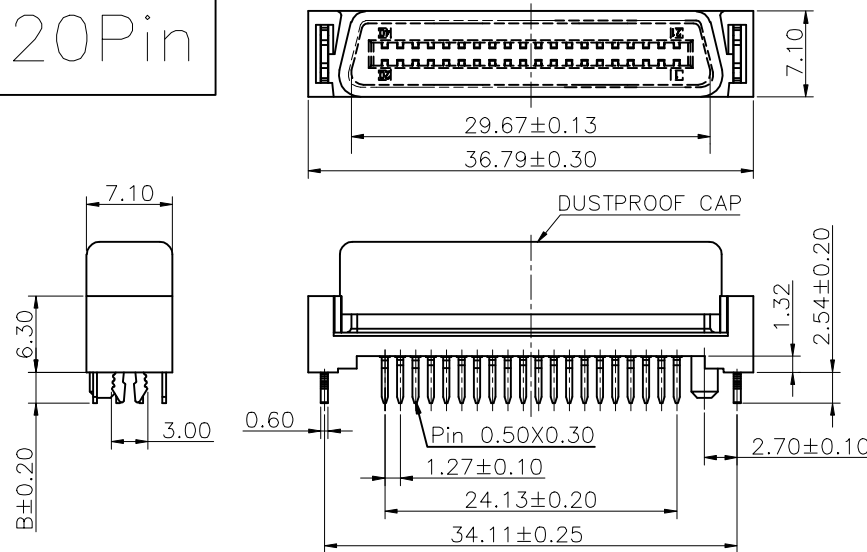

Specifications
 Current Rating:1Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
Materials
 Contact Material:Phosphor Bronze
 Insulator Material:
 PBT(Not resistant to high temperature),
 Nylon(High temperature resistance),
 LCP(High temperature resistance),
 UL 94V-0
 All materials must meet Greenconn
 requirement for environment protection.

**Recommended P.C.Board
 Layout**
 (Tolerance:±0.05)

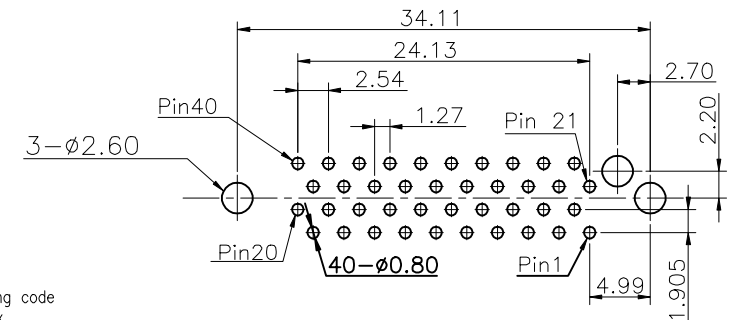

Ordering Information

C SEA263 - 20 XX F XXX R

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

Water code
 No. of Pins per Row
 20

Positioning column information
 A=No locating post
 F=Positioning fork

Pin length
 See the drawing

Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

Insulator Material
 A=PBT
 R=Nylon(Halogen Free)
 C=LCP

Color
 1=Black
 2=White
 3=Yellow
 E=Beige

Contact Material
 A/S/K/T=Phosphor Bronze






Packing code
 A=Box
 B=Tray
 C=Tube
 D=Tape&Reel
 E=Cap+Tube
 F=Cap+Tape&Reel
 G=Acetate Tape+Tube
 H=Acetate Tape+Tape&Reel

格稜股份有限公司
Greenconn Corporation

格菱股份有限公司 Greenconn Corporation					GENERAL TOLERANCE X'±5.0" X.±0.30 .X'±3.0" .X±0.25 .XX'±2.0" .XX±0.15 .XXX'±1.0" .XXX±0.10		DESIGN: CHECKED: AUDITED: APPROVED:		DATE: DATE: DATE: DATE:		DWG. NO. CSEA263-CFXX PART NO. CSEA263-20XX FXXX X1AX		TITLE. PITCH 1.27 SCSI FEMALE DIP SERIES			
REV.	01	UNIT.	mm	SCALE.	2:1	PAGE.	1/1									


REV.	UNIT.	SCALE.	PAGE.	
01	mm	2:1	1/1	

34Pin

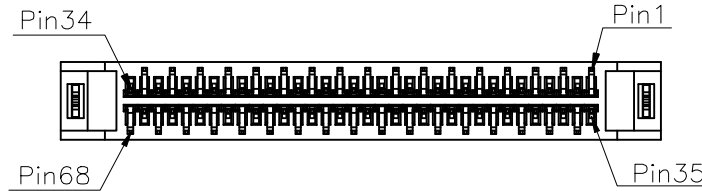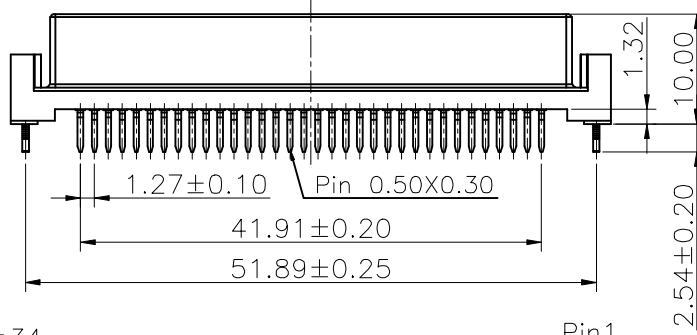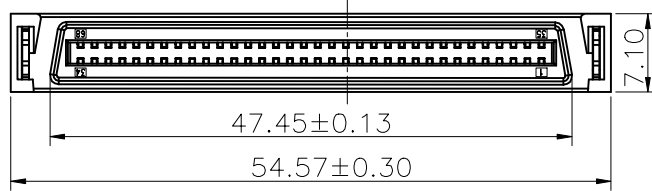

Specifications
 Current Rating:1Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:300VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
Materials
 Contact Material:Phosphor Bronze
 Insulator Material:
 PBT(Not resistant to high temperature),
 Nylon(High temperature resistance),
 LCP(High temperature resistance),
 UL 94V-0
 All materials must meet Greenconn
 requirement for environment protection.

**Recommended P.C.Board
 Layout**
 (Tolerance:±0.05)

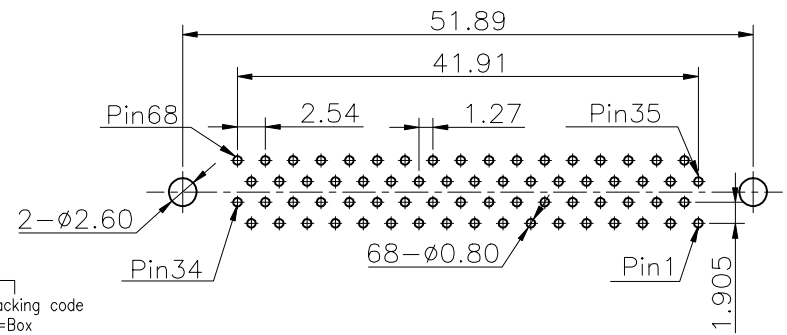

Ordering Information

C SEA263 - 34 XX F XXX R 1 A X

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

Water code
 No. of Pins per Row
 34

Positioning column information
 A=No locating post
 F=Positioning fork

Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

Pin length
 See the drawing

Insulator Material
 A=PBT
 R=Nylon(Halogen Free)
 C=LCP

Color
 1=Black
 2=White
 3=Yellow
 E=Beige

Contact Material
 A/S/K/T=Phosphor Bronze

Packing code
 A=Box
 B=Tray
 C=Tube
 D=Tape&Reel
 E=Cap+Tube
 F=Cap+Tape&Reel
 G=Acetate Tape+Tube
 H=Acetate Tape+Tape&Reel

格菱股份有限公司
Greenconn Corporation

REV. 01 UNIT. mm SCALE. 2:1 PAGE. 1/1

GENERAL TOLERANCE	
X'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGN:	DATE:
CHECKED:	DATE:
AUDITED:	DATE:
APPROVED:	DATE:

DWG. NO.	CSEA263-CFXX
PART NO.	CSEA263-34XX FXXX X1AX

TITLE.
 PITCH 1.27 SCSI
 FEMALE DIP SERIES