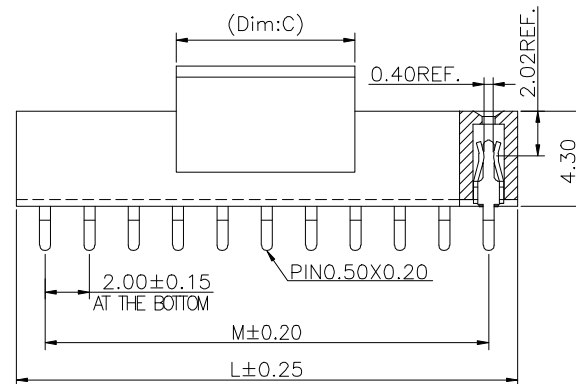


Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:(PBT)−40°C to +105°C,(LCP, Nylon)−55°C to +125°C
Materials
Contact Material:Copper alloy
High Temperature Thermoplastic: Suitable for Reflow Soldering Process (LCP, Nylon HTN, Nylon9T)
Regular Thermoplastic: Only Suitable for Wave Soldering Process (PBT).
All materials must meet Greenconn hazardous substances control standards.

No. of PIN/ROW	Dimension Information	
	M	L
02	2.00	4.60
03	4.00	6.60
04	6.00	8.60
05	8.00	10.60
06	10.00	12.60
07	12.00	14.60
08	14.00	16.60
09	16.00	18.60
10	18.00	20.60
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60
17	32.00	34.60
18	34.00	36.60
19	36.00	38.60
20	38.00	40.60
21	40.00	42.60
22	42.00	44.60
23	44.00	46.60
24	46.00	48.60
25	48.00	50.60
26	50.00	52.60
27	52.00	54.60
28	54.00	56.60
29	56.00	58.60
30	58.00	60.60
31	60.00	62.60
32	62.00	64.60
33	64.00	66.60
34	66.00	68.60
35	68.00	70.60
36	70.00	72.60
37	72.00	74.60
38	74.00	76.60
39	76.00	78.60
40	78.00	80.60

Ordering Information

 **Greenconn**
Website: www.greenconn.com
E-mail: sales@greenconn.com

3RD.ANG
PROJ.

PAGE. 1 / 1

GENERAL TOLERANCE	
X.±5.0°	X.±0.30
.X°±3.0°	.X±0.25
.XX°±2.0°	.XX±0.15
XXX°±1.0°	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:	
DATE:	
DATE:	

DWG. NO.	CSFA208-Series
PART NO.	CSFA208-Series

TITLE.	2.00 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR
--------	---