


1 2 3 4 5 6 7 8 9

F


F

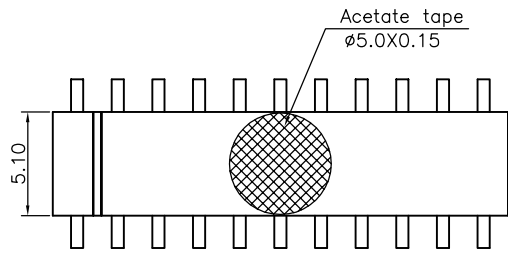


Specifications  
 Current Rating:2.0Amp  
 Insulation Resistance:1000MΩMin.  
 Dielectric Withstanding Voltage:500VAC  
 Contact Resistance:20mΩMax.  
 Operating Temperature:-40°C to +105°C  
 Materials  
 Contact Material:Phosphor Bronze  
 Insulator Material:  
 Nylon(High temperature resistance),  
 LCP(High temperature resistance),  
 UL 94V-0  
 All materials must meet Greenconn  
 hazardous substances control standards.

E

E

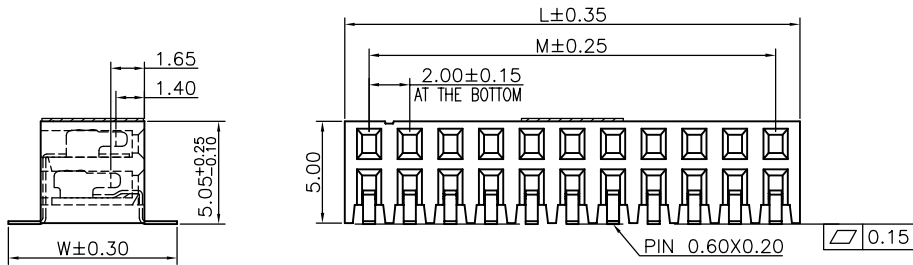

Recommended P.C.Board  
 Layout  
 (Tolerance:±0.05)



No. of PIN/ROW	Dimension Information	
	M	L
02	2.00	4.40
03	4.00	6.40
04	6.00	8.40
05	8.00	10.40
06	10.00	12.40
07	12.00	14.40
08	14.00	16.40
09	16.00	18.40
10	18.00	20.40
11	20.00	22.40
12	22.00	24.40
13	24.00	26.40
14	26.00	28.40
15	28.00	30.40
16	30.00	32.40
17	32.00	34.40
18	34.00	36.40
19	36.00	38.40
20	38.00	40.40
21	40.00	42.40
22	42.00	44.40
23	44.00	46.40
24	46.00	48.40
25	48.00	50.40

D

D

C

C

### Ordering Information

CSFC204 - XX XX X XXX C 1 S X

Plastic specifications  
 1=Single row  
 2=Dual row  
 3=Tripe row  
 4=Quadruple

Water code

Positioning column information  
 A=No locating post  
 B=Round post  
 C=Square post

Pin length  
 See the drawing

Plating code  
 01=Tin  
 02=Gold Flash  
 05=Gold Flash/Tin  
 22=Matte Tin

No. of Pins per Row  
 02~25

Insulator Material  
 R=Nylon(Halogen Free)  
 C=LCP

Color  
 1=Black  
 2=White  
 3=Yellow  
 E=Beige

Contact Material  
 A/S/K/T=Phosphor Bronze

Packing code  
 A=Box  
 B=Tray  
 C=Tube  
 D=Tape&Reel  
 G=Acetate Tape+Tube  
 H=Acetate Tape+Tape&Reel

B

B

A

A

<b>格稜股份有限公司</b> <b>Greenconn Corporation</b>					GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. CSFC204-CXX	TITLE. 2.00 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR
					X.*±5.0*	X.±0.30	CHECKED:	DATE:		
REV.	UNIT.	SCALE.	PAGE.		.XX*±2.0*	.XX±0.15	CO SIGNED:	DATE:	PART NO. CSFC204-XXXX XXXX X1SX	
01	mm	4:1	1/1		.XXX*±1.0*	.XXX±0.10	APPROVED:	DATE:		

1 2 3 4 5 6 7 8 9