




Acetate tape
ø4.00X0.15




Dim.D	NOTE
4.00mm	03PIN
8.05mm	04~40PIN

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet Greenconn
hazardous substances control standards.

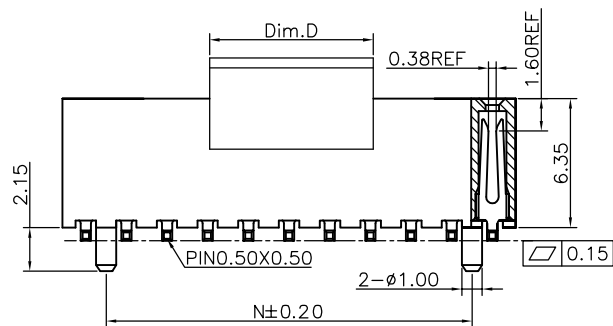

Recommended P.C.Board
Layout
(Tolerance:±0.05)

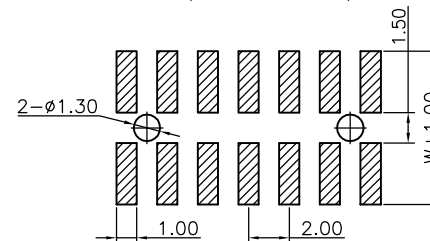

No. of PIN/ROW	Dimension Information			
	M	L	N	
03	4.00	6.30	2.00	
04	6.00	8.30	4.00	
05	8.00	10.30	6.00	
06	10.00	12.30	8.00	
07	12.00	14.30	10.00	
08	14.00	16.30	12.00	
09	16.00	18.30	14.00	
10	18.00	20.30	16.00	
11	20.00	22.30	18.00	
12	22.00	24.30	20.00	
13	24.00	26.30	22.00	
14	26.00	28.30	24.00	
15	28.00	30.30	26.00	
16	30.00	32.30	28.00	
17	32.00	34.30	30.00	
18	34.00	36.30	32.00	
19	36.00	38.30	34.00	
20	38.00	40.30	36.00	
21	40.00	42.30	38.00	
22	42.00	44.30	40.00	
23	44.00	46.30	42.00	
24	46.00	48.30	44.00	
25	48.00	50.30	46.00	
26	50.00	52.30	48.00	
27	52.00	54.30	50.00	
28	54.00	56.30	52.00	
29	56.00	58.30	54.00	
30	58.00	60.30	56.00	
31	60.00	62.30	58.00	
32	62.00	64.30	60.00	
33	64.00	66.30	62.00	
34	66.00	68.30	64.00	
35	68.00	70.30	66.00	
36	70.00	72.30	68.00	
37	72.00	74.30	70.00	
38	74.00	76.30	72.00	
39	76.00	78.30	74.00	
40	78.00	80.30	76.00	

Ordering Information

CSFC215 - XX XX X XXX C 1 S X

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code

Positioning column information
A=No locating post
B=Round post
C=Square post

Pin length
See the drawing

Insulator Material
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze

Packing code
A=Box
B=Tray
C=Tube
D=Tape&Reel
E=Cap+Tube
F=Cap+Tape&Reel
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

No. of Pins per Row
02~40

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

格稜股份有限公司
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.	
01	mm	4:1	1/1	

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DATE:	DATE:
DATE:	DATE:
DATE:	DATE:
DATE:	DATE:

DWG. NO.
CSFC215-Cxxxx
PART NO.
CSFC215-XXXX XXX X1SX

TITLE.
2.00 FEMALE HEADER DUAL ROWS SMT TYPE CONNECTOR