

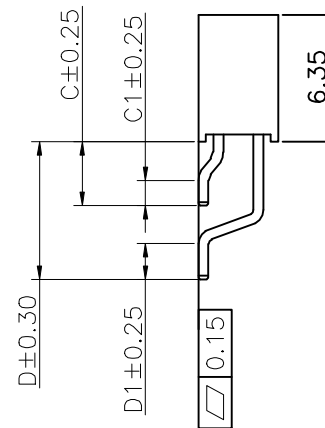
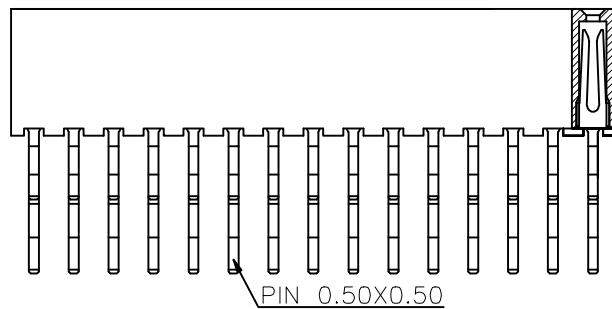


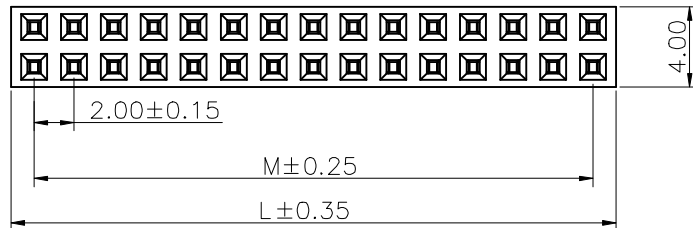

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet Greenconn
hazardous substances control standards.

Recommended P.C.B. Layout
(Tolerance:0.05mm)



No. of PIN/ROW	Dimension Information	
	M	L
02	2.00	4.30
03	4.00	6.30
04	6.00	8.30
05	8.00	10.30
06	10.00	12.30
07	12.00	14.30
08	14.00	16.30
09	16.00	18.30
10	18.00	20.30
11	20.00	22.30
12	22.00	24.30
13	24.00	26.30
14	26.00	28.30
15	28.00	30.30
16	30.00	32.30
17	32.00	34.30
18	34.00	36.30
19	36.00	38.30
20	38.00	40.30
21	40.00	42.30
22	42.00	44.30
23	44.00	46.30
24	46.00	48.30
25	48.00	50.30
26	50.00	52.30
27	52.00	54.30
28	54.00	56.30
29	56.00	58.30
30	58.00	60.30
31	60.00	62.30
32	62.00	64.30
33	64.00	66.30
34	66.00	68.30
35	68.00	70.30
36	70.00	72.30
37	72.00	74.30
38	74.00	76.30
39	76.00	78.30
40	78.00	80.30

Ordering Information

CSFD218		-	XX	XX	A	XXX	C	1	A	X			
Plastic specifications		Water code		Positioning column information		Pin length		Color			Packing code		
1=Single row				A=No locating post		See the drawing		1=Black			A=Box		
2=Dual row				B=Round post				2=White			C=Tube		
3=Tripe row				C=Square post				3=Yellow			D=Tape&Reel		
4=Quadruple								E=Beige			G=Acetate	Tape+Tube	
		No. of Pins per Row	Plating code			Insulator Material		Contact Material			H=Acetate	Tape+Tape&Reel	
		02~40	01=Tin			R=Nylon(Halogen Free)		A=Phosphor Bronze					
			02=Gold Flash			C=LCP							
			05=Gold Flash/Tin										
			22=Matte Tin										