

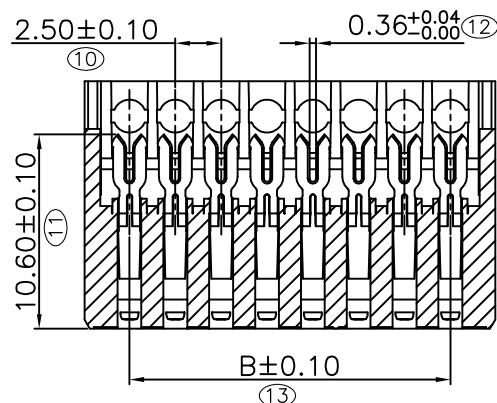
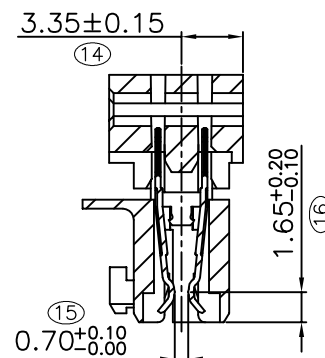
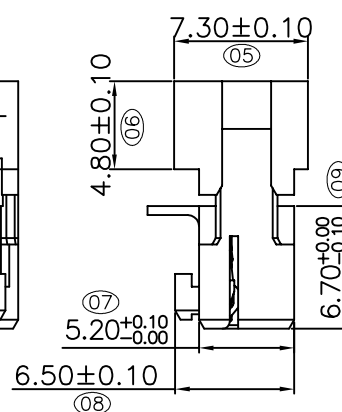



Shipping Arrangement: 50 sets per strip
Shipped in carton box

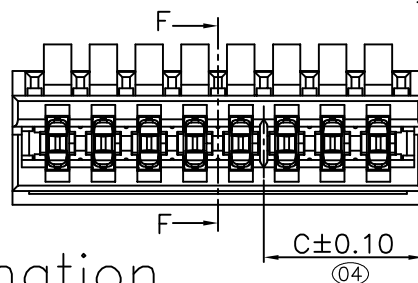

SECTION E-E

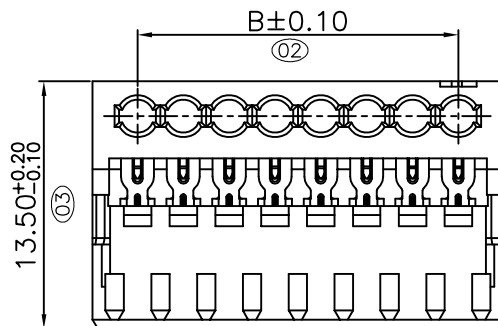

SECTION F-F



Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:10mΩMax.
Operating Temperature:-40°C to +130°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:Thermoplastic,
UL 94V-0 PBT or the equivalent material
☆All materials must meet Greenconn
hazardous substances control standards.
"★": Critical Characteristics.
indicates product characteristics, functionalities,
and manufacturing processes regarding to
customer's specifications
"☆": Safety Features
indicates product characteristics, functionalities,
and manufacturing processes complying to
legal regulations stated by local government

Ordering Information

C SGA106 - XX XX A 001 A 4 N X

No. Of Pins Per Row 02~15
Standard Plating 97=100~200u" Bright tin over
50~100u" Ni underplate overall.
Color 4=Natural
Standard Packing B=Tray

Pin NO.	A	B	C
02	7.40	2.50	
03	9.90	5.00	6.20
04	12.40	7.50	3.70
05	14.90	10.00	11.20
06	17.40	12.50	6.20
07	19.90	15.00	6.20
08	22.40	17.50	8.70
09	24.90	20.00	21.20
10	27.40	22.50	6.20
11	29.90	25.00	11.20
12	32.40	27.50	11.20
13	34.90	30.00	6.20
14	37.40	32.50	3.70
15	39.90	35.00	6.20

Fully Loaded

Greenconn
Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 5:2

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX.±0.15
.XXX.*±1.0°	.XXX.±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.


CSGA106-CA1AN

PART NO.




CSGA106-XXXXA001A4NX

TITLE.





RASTLink 2.5mm
Single Row
Female Connector

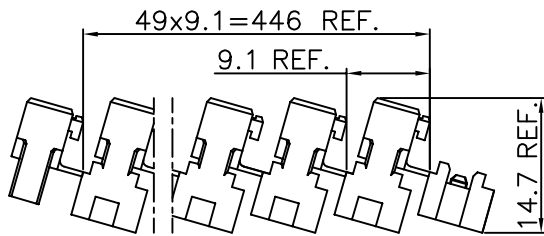

Shipping Arrangement: 50 sets per strip
Shipped in carton box

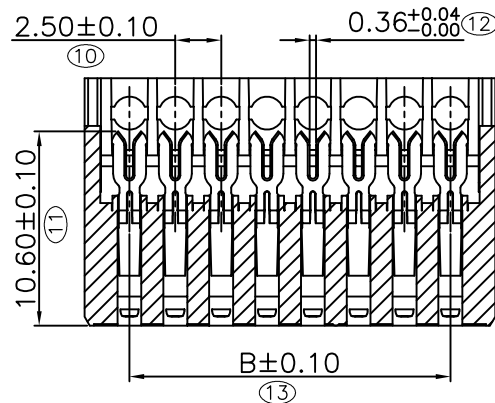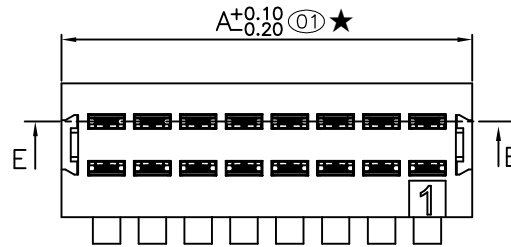

SECTION E-E

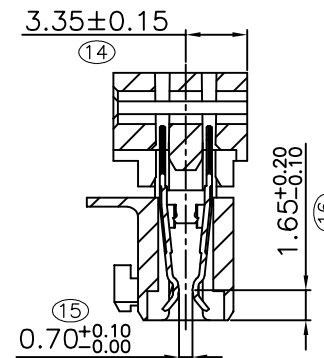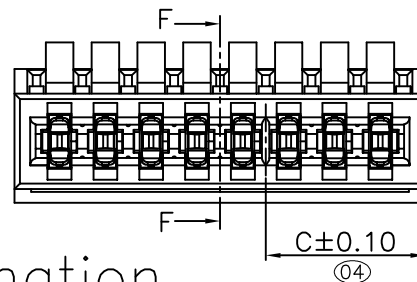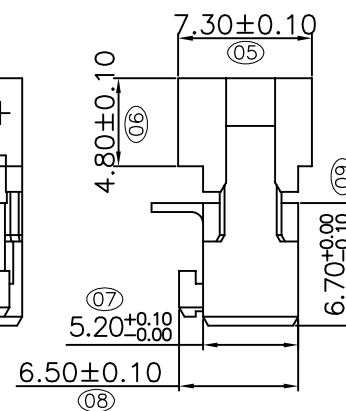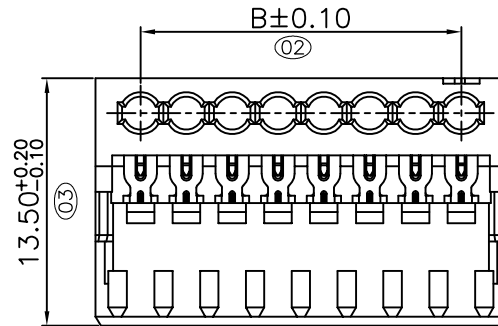

SECTION F-F

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:10mΩMax.
Operating Temperature:-40°C to +130°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:Thermoplastic,
UL 94V-0 PBT or the equivalent material
☆All materials must meet Greenconn
hazardous substances control standards.
"★": Critical Characteristics.
indicates product characteristics, functionalities,
and manufacturing processes regarding to
customer's specifications
"☆": Safety Features
indicates product characteristics, functionalities,
and manufacturing processes complying to
legal regulations stated by local government

Ordering Information

C SGA106 - XX XX A 002 A 4 N X
No. Of Pins Per Row 02~15
Standard Plating 97=100~200u" Bright tin over
50~100u" Ni underplate overall.
Color 4=Natural
Standard Packing B=Tray

Pin NO.	A	B	C
02	7.40	2.50	3.70
03	9.90	5.00	8.70
04	12.40	7.50	11.20
05	14.90	10.00	13.70
06	17.40	12.50	16.20
07	19.90	15.00	18.70
08	22.40	17.50	21.20
09	24.90	20.00	23.70
10	27.40	22.50	26.20
12	32.40	27.50	31.20
15	39.90	35.00	38.70

Fully Loaded

Greenconn
Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 5:2


3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX.±0.15
.XXX.*±1.0°	.XXX.±0.10


DESIGNED:
CHECKED:
APPROVED:
DATE:
DATE:
DATE:

DWG. NO.
CSGA106-CA2AN
PART NO.
CSGA106-XXXXA002A4NX

TITLE.
RASTLink 2.5mm
Single Row
Female Connector

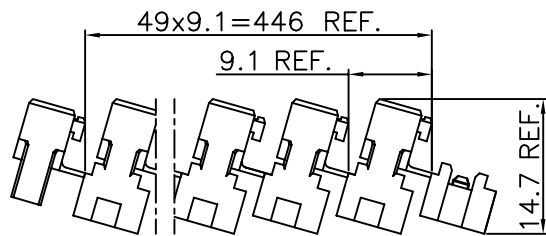

Shipping Arrangement: 50 sets per strip
Shipped in carton box



Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:10mΩMax.
Operating Temperature:-40°C to +130°C
Materials

Contact Material:Phosphor Bronze
Insulator Material:Thermoplastic,
UL 94V-0 PBT or the equivalent material


☆All materials must meet Greenconn
hazardous substances control standards.

"★": Critical Characteristics.





indicates product characteristics, functionalities,
and manufacturing processes regarding to
customer's specifications

"☆": Safety Features


indicates product characteristics, functionalities,
and manufacturing processes complying to
legal regulations stated by local government

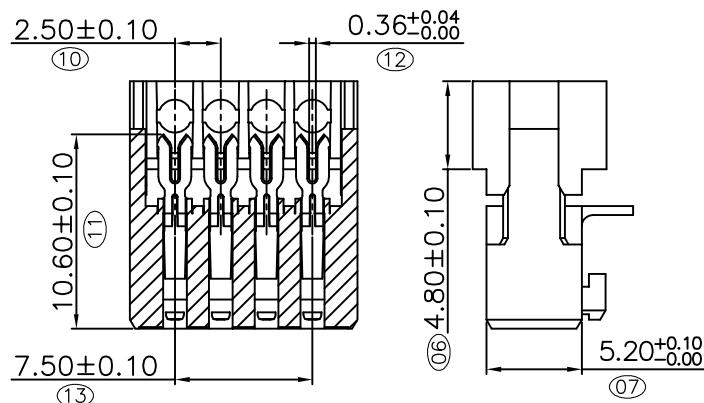

SECTION E-E

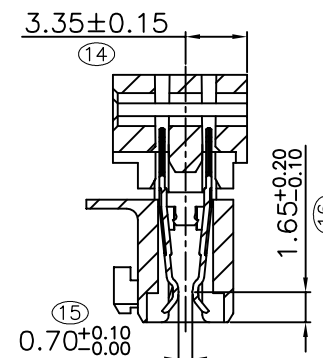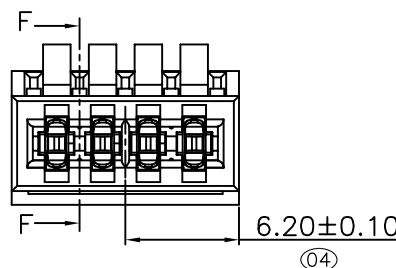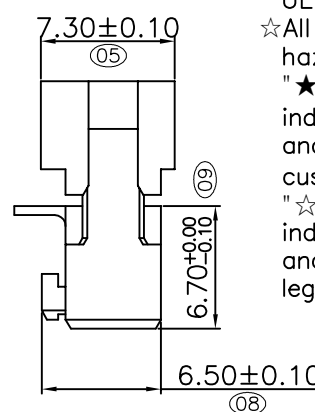

SECTION F-F



Fully Loaded

Ordering Information

C SGA106 - XX XX A 003 A 4 N X

No. Of Pins Per Row
04

Standard Plating
97=100~200u" Bright tin over
50~100u" Ni underplate overall.

Color
4=Natural

Standard Packing
B=Tray

Greenconn
Website:www.greenconn.com
E-mail:sales@greenconn.com


3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10



DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.
CSGA106-CA3AN
PART NO.
CSGA106-04XXA003A4NX





TITLE.
RASTLink 2.5mm
Single Row
Female Connector

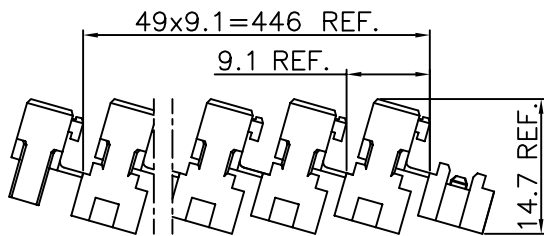

Shipping Arrangement: 50 sets per strip
Shipped in carton box

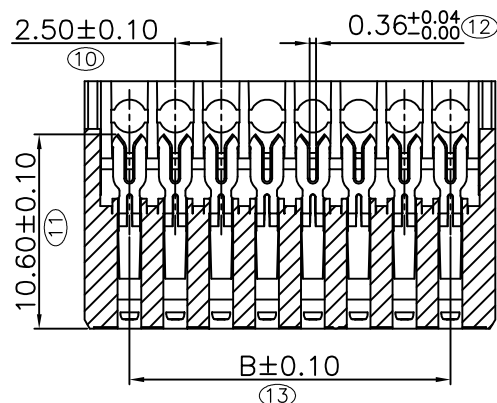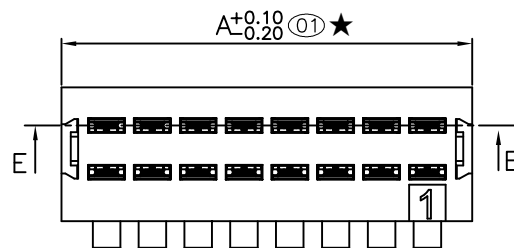

SECTION E-E

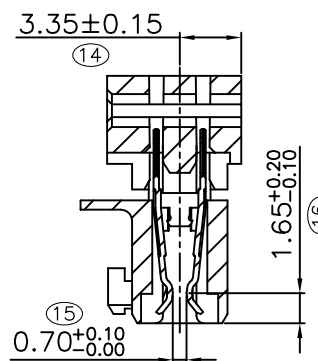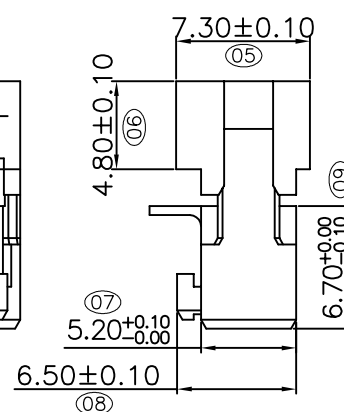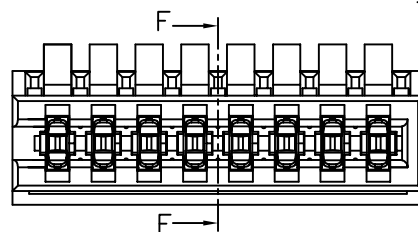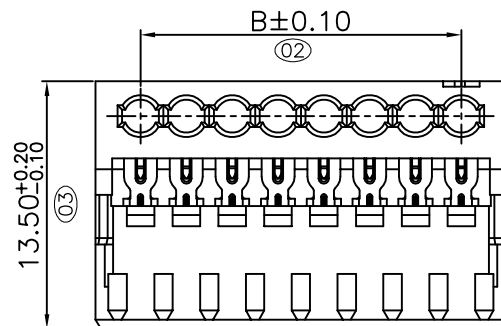

SECTION F-F

Specifications
 Current Rating: 2.0Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 500VAC
 Contact Resistance: 10mΩMax.
 Operating Temperature: -40°C to +130°C
Materials
 Contact Material: Phosphor Bronze
 Insulator Material: Thermoplastic, UL 94V-0 PBT or the equivalent material
 ☆All materials must meet Greenconn hazardous substances control standards.
 "★": Critical Characteristics.
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 "☆": Safety Features
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Ordering Information

C SGA106 - XX XX A 004 A 4 N X

No. Of Pins Per Row
02~15

Standard Plating
97=100~200u" Bright tin over
50~100u" Ni underplate overall.

Color
4=Natural

Standard Packing
B=Tray

Pin NO.	A	B
02	7.40	2.50
03	9.90	5.00
04	12.40	7.50
05	14.90	10.00
06	17.40	12.50
07	19.90	15.00
08	22.40	17.50
09	24.90	20.00
10	27.40	22.50
11	29.90	25.00
12	32.40	27.50
13	34.90	30.00
14	37.40	32.50
15	39.90	35.00

Fully Loaded



REV. A UNIT. mm SCALE. 5:2


3RD. ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX.±0.15
.XXX.*±1.0°	.XXX.±0.10



DESIGNED: DATE:
 CHECKED: DATE:
 APPROVED: DATE:

DWG. NO.
CSGA106-CA4AN
 PART NO.
CSGA106-XXXXA004A4NX





TITLE.
RASTLink 2.5mm
Single Row
Female Connector

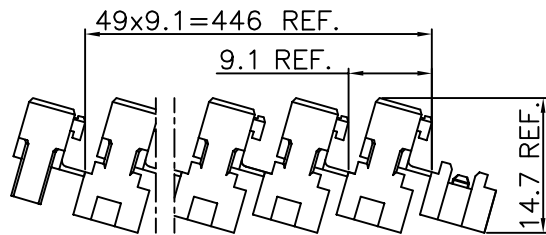

Shipping Arrangement: 50 sets per strip
Shipped in carton box

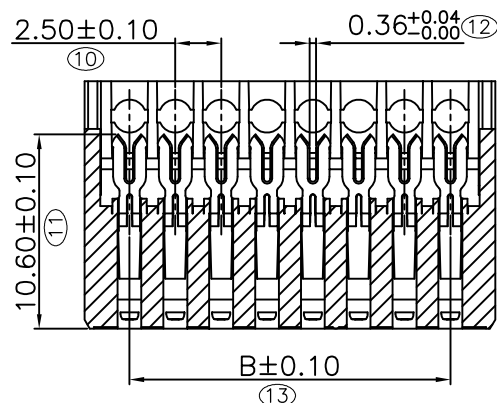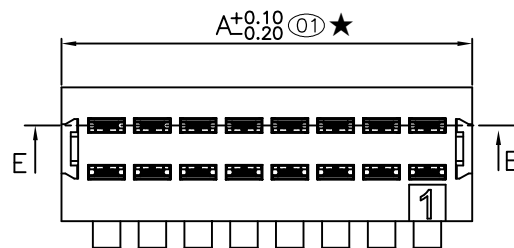

SECTION E-E

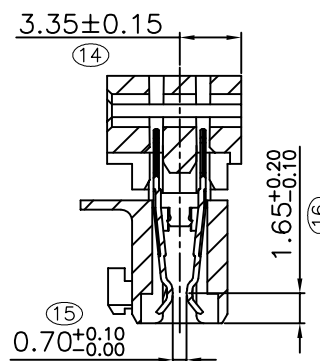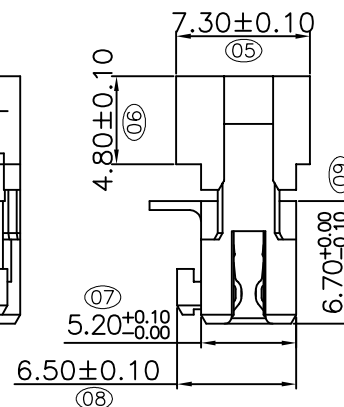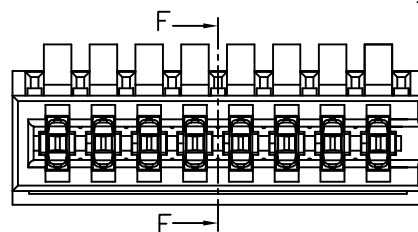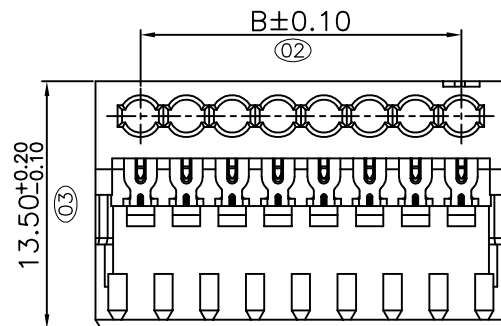

SECTION F-F

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:10mΩMax.
Operating Temperature:-40°C to +130°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:Thermoplastic,
UL 94V-0 PBT or the equivalent material
☆All materials must meet Greenconn
hazardous substances control standards.
"★": Critical Characteristics.
indicates product characteristics, functionalities,
and manufacturing processes regarding to
customer's specifications
"☆": Safety Features
indicates product characteristics, functionalities,
and manufacturing processes complying to
legal regulations stated by local government

Ordering Information


C SGA106 - XX XX A 005 A 4 N X

No. Of Pins Per Row
02~15

Standard Plating
97=100~200u" Bright tin over
50~100u" Ni underplate overall.

Color
4=Natural

Standard Packing
B=Tray



Fully Loaded

Pin NO.	A	B
02	7.40	2.50
03	9.90	5.00
04	12.40	7.50
05	14.90	10.00
06	17.40	12.50
07	19.90	15.00
08	22.40	17.50
09	24.90	20.00
10	27.40	22.50
11	29.90	25.00
12	32.40	27.50
13	34.90	30.00
14	37.40	32.50
15	39.90	35.00

Greenconn
Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 5:2

3RD.ANG
PROJ.
PAGE. 1/1


GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X.*±3.0°	.X.±0.25
.XX.*±2.0°	.XX.±0.15
.XXX.*±1.0°	.XXX.±0.10

DESIGNED:
CHECKED:
APPROVED:




DATE:
DATE:
DATE:

DWG. NO.
CSGA106-CA5AN
PART NO.
CSGA106-XXXXA005A4NX





TITLE.
RASTLink 2.5mm
Single Row
Female Connector

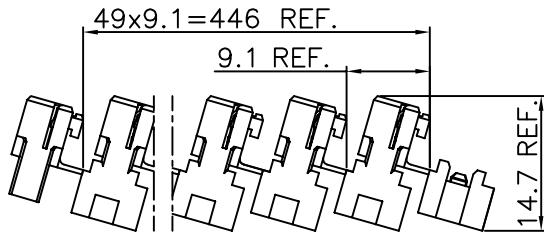

Shipping Arrangement: 50 sets per strip
Shipped in carton box

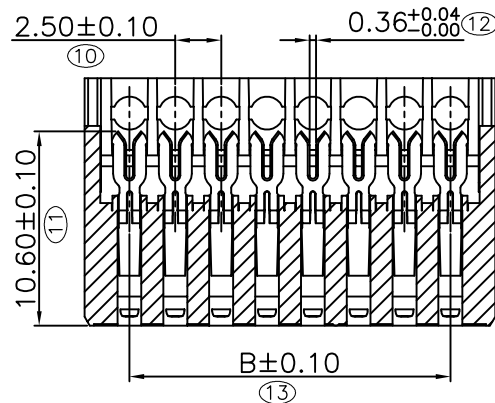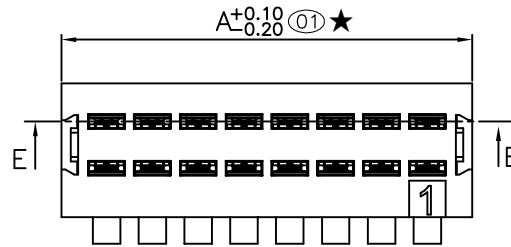

SECTION E-E

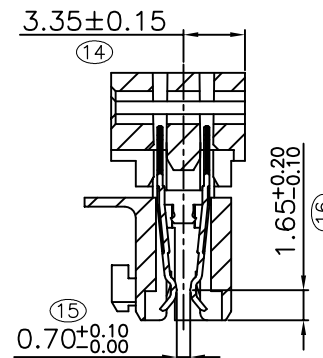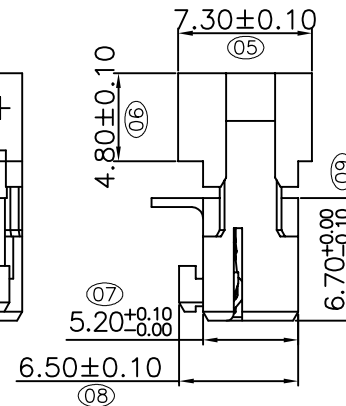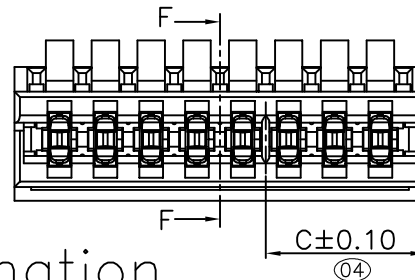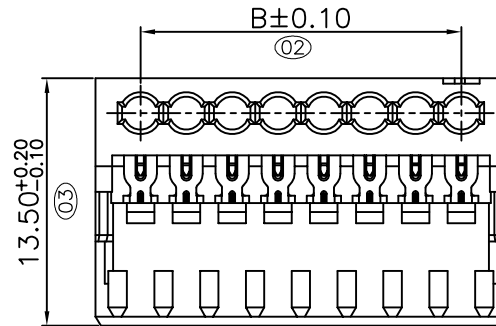


SECTION F-F

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:10mΩMax.
Operating Temperature:-40°C to +130°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:Thermoplastic,
UL 94V-0 PBT or the equivalent material
☆All materials must meet Greenconn
hazardous substances control standards.
"★": Critical Characteristics.
indicates product characteristics, functionalities,
and manufacturing processes regarding to
customer's specifications
"☆": Safety Features
indicates product characteristics, functionalities,
and manufacturing processes complying to
legal regulations stated by local government

Ordering Information

C SGA106 - XX XX A 006 A 4 N X
No. Of Pins Per Row 02~15
Standard Plating 97=100~200u" Bright tin over
50~100u" Ni underplate overall.
Color 4=Natural
Standard Packing B=Tray

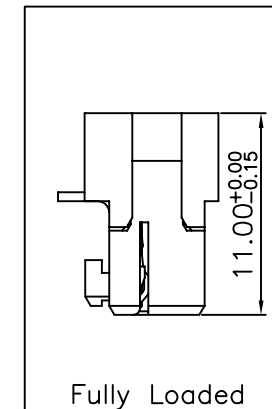

Fully Loaded

Pin NO.	A	B	C
03	9.90	5.00	3.70
08	22.40	17.50	6.20

Greenconn
Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 5:2

3RD.ANG
PROJ.
PAGE. 1/1

GENERAL TOLERANCE
X.*±5.0° X.±0.30
.X.*±3.0° .X.±0.25
.XX.*±2.0° .XX±0.15
.XXX.*±1.0° .XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
CSGA106-CA6AN
PART NO.
CSGA106-XXXXA006A4NX

TITLE.

RASTLink 2.5mm
Single Row
Female Connector