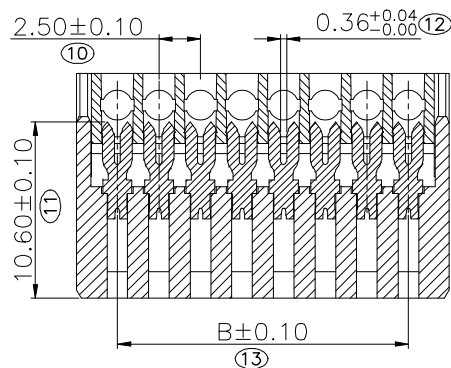
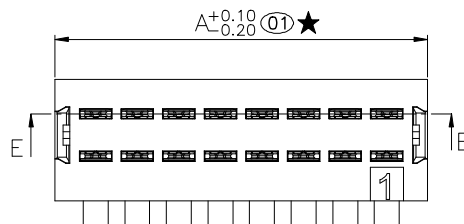
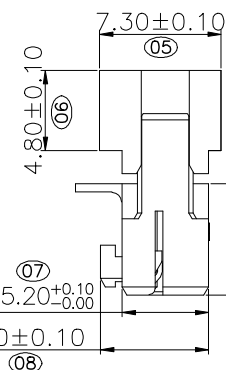
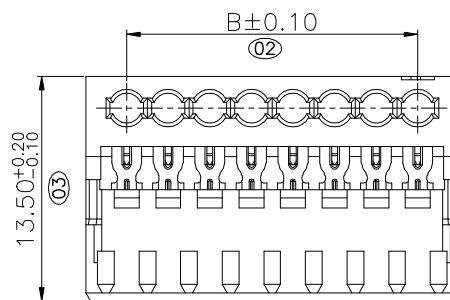



Shipping Arrangement: 50 sets per strip
Shipped in carton box





SECTION E-E



Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:10mΩMax.
Operating Temperature:-40°C to +130°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:Thermoplastic,
UL 94V-0 PBT or the equivalent material
★All materials must meet Greenconn
hazardous substances control standards.
"★": Critical Characteristics.
indicates product characteristics, functionalities,
and manufacturing processes regarding to
customer's specifications.
"☆": Safety Features.
indicates product characteristics, functionalities,
and manufacturing processes complying to
legal regulations stated by local government.



Fully Loaded

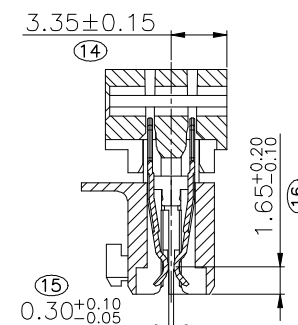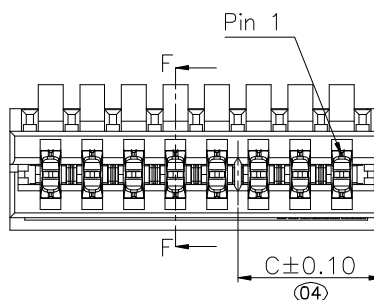

SECTION F-F

Pin NO	A	B	Mold
02	7.40	2.50	×
03	9.90	5.00	×
04	12.40	7.50	×
05	14.90	10.00	✓
06	17.40	12.50	×
07	19.90	15.00	✓
08	22.40	17.50	✓
09	24.90	20.00	×
10	27.40	22.50	×
11	29.90	25.00	×
12	32.40	27.50	×
13	34.90	30.00	×
14	37.40	32.50	×
15	39.90	35.00	×
16	42.40	37.50	×
17	44.90	40.00	×

Spacer bar	C
00	
12	3.70
23	6.20
34	8.70
45	11.20
56	13.70
67	16.20
78	18.70
89	21.20
9A	23.70
AB	26.20
BC	28.70
CD	31.20
DE	33.70
EF	36.20
FG	38.70
GH	41.20



REV.	UNIT.	SCALE.
01	mm	5:2









3RD.ANG PROJ.	PAGE.
1/2	

GENERAL TOLERANCE	
X.'±5.0'	X.±0.30
.X'±3.0'	.X±0.25
.XX'±2.0'	.XX±0.15
.XXX'±1.0'	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO.	PART NO.
CSGA107-CAAXX	CSGA107-XXXXAAXXA4AB

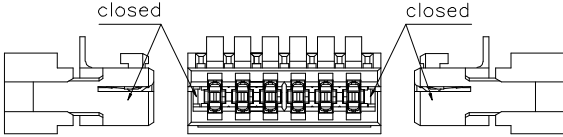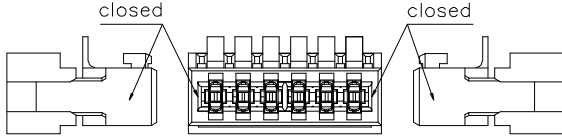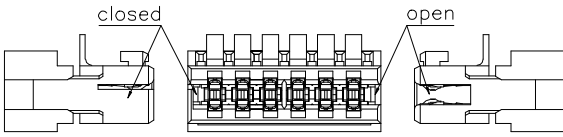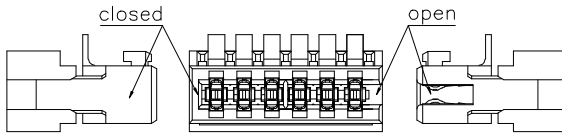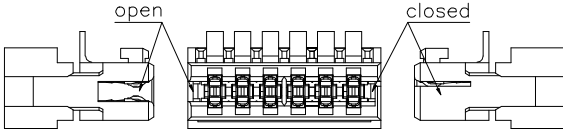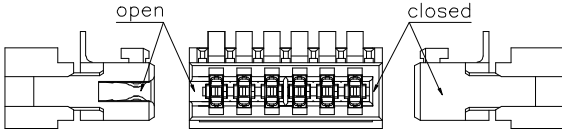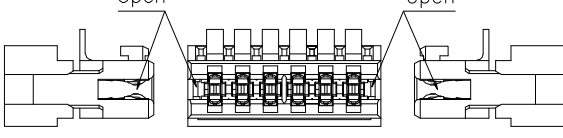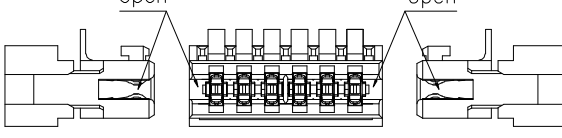TITLE.
RASTLink 2.5mm
Single Row
Female Connector
(1mm PCB THK)

	1	2	3	4	5	6	7	8	9	
F	Ordering Information C SGA107 - XX XX A A XX A 4 A B No. Of Pins Per Row 05&07&08 Standard Plating 97=100~200u" Bright tin over 50~100u" Ni underplate overall. Spacer bar Code explanation: 00: No keying 12: Keying between pin 1 and pin 2 23: Keying between pin 2 and pin 3 ...and so on (When the pin number is above 10, use the letters A, B, C... A for 10, B for 11... and so on, for example, when the code is AB, it means there is a key between the 10th Pin and the 11th Pin) Color 4=Natural Standard Packing B=Tray									F
E										E
D	PART NO.		Product form (buckle)			PART NO.		Product form (without buckle)		D
C	CSGA107-XXXXA A XXA4AB					CSGA107-XXXXA E XXA4AB				C
B	CSGA107-XXXXA B XXA4AB					CSGA107-XXXXA F XXA4AB				B
A	CSGA107-XXXXA C XXA4AB					CSGA107-XXXXA G XXA4AB				A
	CSGA107-XXXXA D XXA4AB					CSGA107-XXXXA H XXA4AB				
 3RD.ANG PROJ.  PAGE. 2/2		GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.	TITLE. RASTLink 2.5mm Single Row Female Connector (1mm PCB THK)			
		X:±5.0°	X:±0.30			CSGA107-CAAXX				
		.X'±3.0°	.X:±0.25			PART NO.				
		.XX'±2.0°	.XX:±0.15			CSGA107-XXXXAAXXA4AB				
REV. 01	UNIT. mm	SCALE. 5:3		.XXX'±1.0°	.XXX:±0.10	APPROVED:	DATE:			
1	2	3	4	5	6	7	8	9		