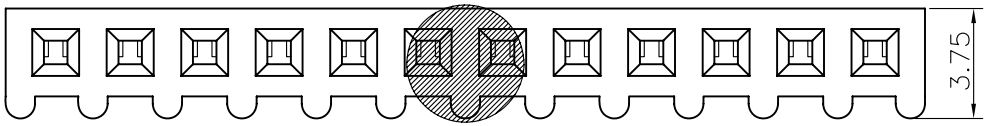

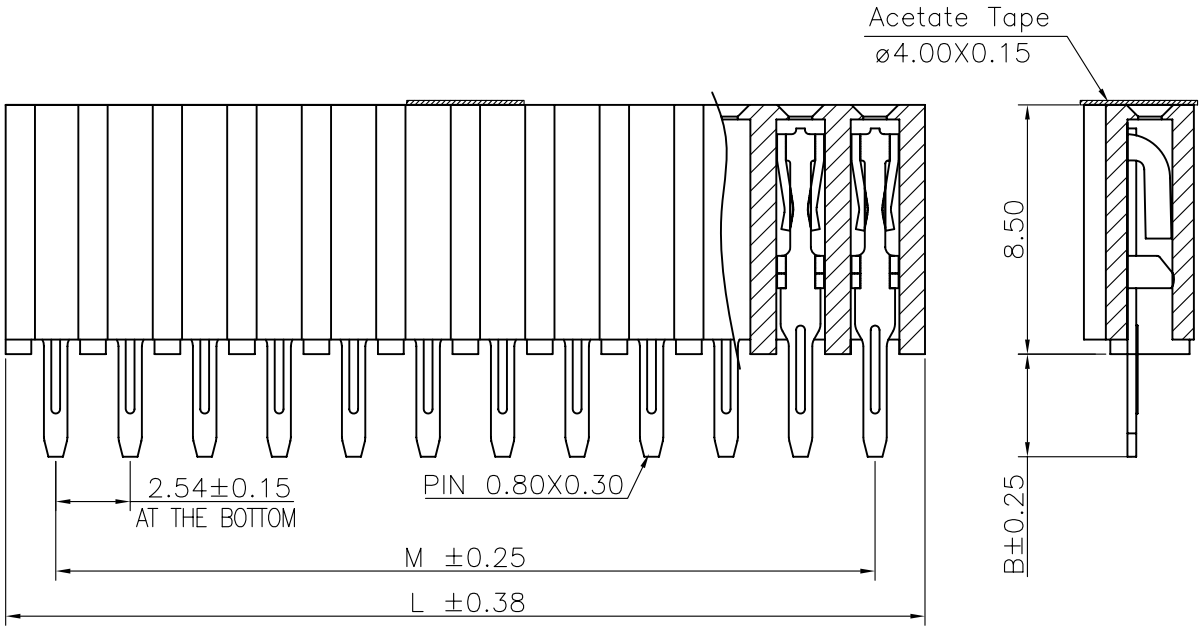

Specifications
Current Rating:3.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
PBT(Not resistant to high temperature),
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V−0
All materials must meet Greenconn hazardous substances control standards.

No. of PIN/ROW	Dimension Information M	L
02	2.54	5.88
03	5.08	8.42
04	7.62	10.96
05	10.16	13.50
06	12.70	16.04
07	15.24	18.58
08	17.78	21.12
09	20.32	23.66
10	22.86	26.20
11	25.40	28.74
12	27.94	31.28
13	30.48	33.82
14	33.02	36.36
15	35.56	38.90
16	38.10	41.44
17	40.64	43.98
18	43.18	46.52
19	45.72	49.06
20	48.26	51.60
21	50.80	54.14
22	53.34	56.68
23	55.88	59.22
24	58.42	61.76
25	60.96	64.30
26	63.50	66.84
27	66.04	69.38
28	68.58	71.92
29	71.12	74.46
30	73.66	77.00
31	76.20	79.54
32	78.74	82.08
33	81.28	84.62
34	83.82	87.16
35	86.36	89.70
36	88.90	92.24
37	91.44	94.78
38	93.98	97.32
39	96.52	99.86
40	99.06	102.40

Ordering Information

C SHA107 − XX XX A XXX X 1 A X

- Plastic specifications: 1=Single row, 2=Dual row, 3=Tripe row, 4=Quadruple
- Water code
- No. of Pins per Row: 02~40
- Plating code: 01=Tin, 02=Gold Flash, 05=Gold Flash/Tin, 22=Matte Tin
- Positioning column information: A=No locating post, B=Round post, C=Square post
- Pin length: See the drawing
- Insulator Material: A=PBT, R=Nylon(Halogen Free), C=LCP
- Color: 1=Black, 2=White, 3=Yellow, E=Beige
- Contact Material: A/S/K/T=Phosphor Bronze
- Packing code: A=Box, B=Tray, C=Tube, D=Tape&Reel, E=Cap+Tube, F=Cap+Tape&Reel, G=Acetate Tape+Tube, H=Acetate Tape+Tape&Reel

Recommended P.C.Board Layout
(Tolerance:±0.05)



格稜股份有限公司
Greenconn Corporation

REV.	UNIT.	SCALE.	PAGE.
01	mm	4:1	1/1

GENERAL TOLERANCE	
X.°±5.0°	X.±0.30
.X°±3.0°	.X±0.25
.XX°±2.0°	.XX±0.15
.XXX°±1.0°	.XXX±0.10

DWG. NO. CSHA107−CAXX

PART NO. CSHA107−XXXX AXXX A1XX

TITLE. 2.54 FEMALE HEADER SINGLE ROW DIP TYPE CONNECTOR