

Technical drawing of a vertical assembly. The drawing shows a central vertical component with a flange at the top and a base. Dimensions are indicated as follows:


- Top flange width: 8.15 REF.
- Overall height: 8.50
- Height from base to top flange: 3.76 REF.
- Base width: 2.54 ± 0.20
- Bottom flange width: $B \pm 0.25$

Note: 2° MAX SWAY (EITHER DIRECTION AT THE TOP)

Acetate tape
(ø5.0X0.15)

No. of PIN/ROW	Dimension	Information
	M	L
02	2.54	5.58
03	5.08	8.12
04	7.62	10.66
05	10.16	13.20
06	12.70	15.74
07	15.24	18.28
08	17.78	20.82
09	20.32	23.36
10	22.86	25.90
11	25.40	28.44
12	27.94	30.98
13	30.48	33.52
14	33.02	36.06
15	35.56	38.60
16	38.10	41.14
17	40.64	43.68
18	43.18	46.22
19	45.72	48.76
20	48.26	51.30
21	50.80	53.84
22	53.34	56.38
23	55.88	58.92
24	58.42	61.46
25	60.96	64.00
26	63.50	66.54
27	66.04	69.08
28	68.58	71.62
29	71.12	74.16
30	73.66	76.70
31	76.20	79.24
32	78.74	81.78
33	81.28	84.32
34	83.82	86.86
35	86.36	89.40
36	88.90	91.94
37	91.44	94.48
38	93.98	97.02
39	96.52	99.56
40	99.06	102.10

Recommended P.C.Board
Layout
(Tolerance:±0.05)

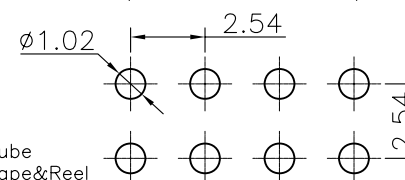

C SHA201 - XX XX A XXX X
 Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple
 Water code
 No. of Pins per Row
 02~40
 Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin
 Positioning column information
 A=No locating post
 B=Round post
 C=Square post
 Pin length
 See the drawing
 Insulator Material
 A=PBT
 R=Nylon(Halogen Free)
 C=CP

格 稜 股 份 有 限 公 司
Greenconn Corporation

格稜股份有限公司 Greenconn Corporation					GENERAL TOLERANCE			DWG. NO.	TITLE.
					X.*±5.0°	X.±0.30		CSHA201-CAXX	
					.X*±3.0°	.X±0.25		PART NO.	
					.XX*±2.0°	.XX±0.15			
					.XXX*±1.0°	.XXX±0.10			
REV. 01	UNIT. mm	SCALE. 4:1	PAGE. 1/1		CSHA201-XXXX AXXX X1XX			2.54 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR	

TITLE.	2.54 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR
--------	---