

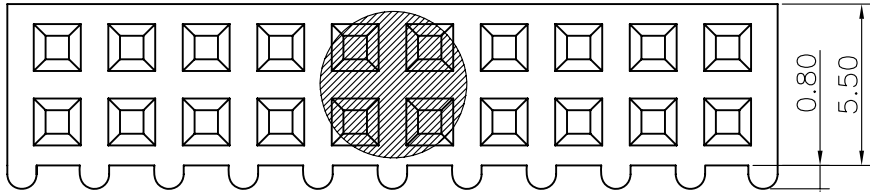


1 2 3 4 5 6 7 8 9

F



E

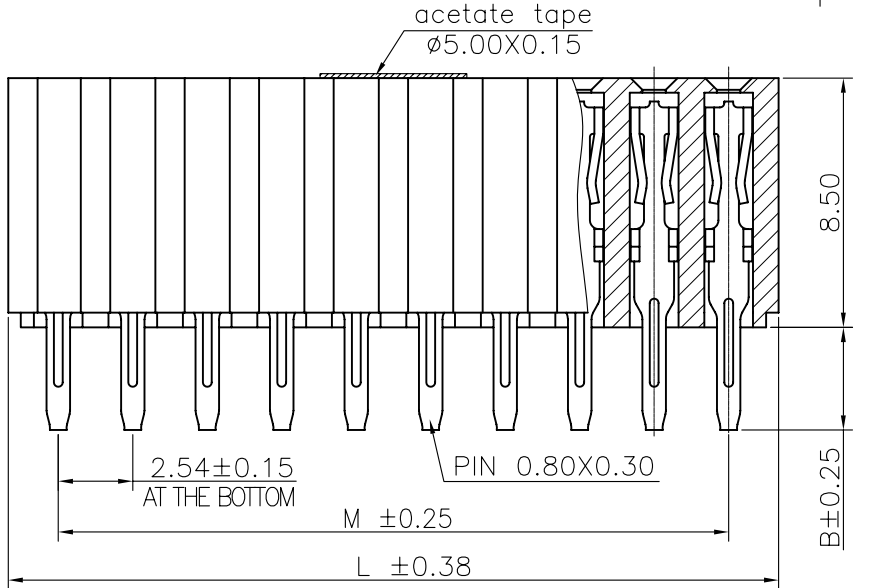

2.54±0.20 AT THE BOTTOM

Specifications
 Current Rating:3.0Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:600VAC
 Contact Resistance:20mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:
 PBT(Not resistant to high temperature),
 Nylon(High temperature resistance),
 LCP(High temperature resistance),
 UL 94V-0
 All materials must meet Greenconn
 hazardous substances control standards.

D


C

No. of PIN/ROW	Dimension Information	
	M	L
02	2.54	5.88
03	5.08	8.42
04	7.62	10.96
05	10.16	13.50
06	12.70	16.04
07	15.24	18.58
08	17.78	21.12
09	20.32	23.66
10	22.86	26.20
11	25.40	28.74
12	27.94	31.28
13	30.48	33.82
14	33.02	36.36
15	35.56	38.90
16	38.10	41.44
17	40.64	43.98
18	43.18	46.52
19	45.72	49.06
20	48.26	51.60
21	50.80	54.14
22	53.34	56.68
23	55.88	59.22
24	58.42	61.76
25	60.96	64.30
26	63.50	66.84
27	66.04	69.38
28	68.58	71.92
29	71.12	74.46
30	73.66	77.00
31	76.20	79.54
32	78.74	82.08
33	81.28	84.62
34	83.82	87.16
35	86.36	89.70
36	88.90	92.24
37	91.44	94.78
38	93.98	97.32
39	96.52	99.86
40	99.06	102.40

Ordering Information

C SHA207 - XX XX A XXX X
 Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple
 Water code
 No. of Pins per Row 02~40
 Positioning column information
 A=No locating post
 B=Round post
 C=Square post
 Pin length
 See the drawing
 Insulator Material
 A=PBT
 R=Nylon(Halogen Free)
 C=LCP
 Color
 1=Black
 2=White
 3=Yellow
 E=Beige
 Contact Material
 A/S/K/T=Phosphor Bronze
 Packing code
 A=Box
 B=Tray
 C=Tube
 D=Tape&Reel
 E=Cap+Tube
 F=Cap+Tape&Reel
 G=Acetate Tape+Tube
 H=Acetate Tape+Tape&Reel

Recommended P.C.Board Layout

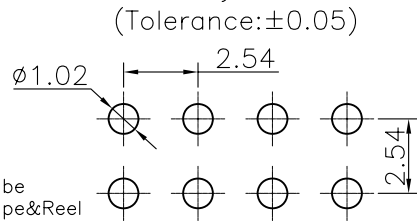

A

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DWG. NO.
 CSHA207-CAXX
 PART NO.
 CSHA207-XXXX AXXX X1XX

TITLE.
 2.54 FEMALE HEADER
 DUAL ROWS DIP TYPE
 CONNECTOR

REV.	UNIT.	SCALE.	PAGE.
01	mm	4:1	1/1

1 2 3 4 5 6 7 8 9