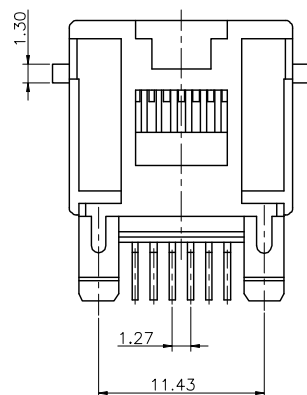

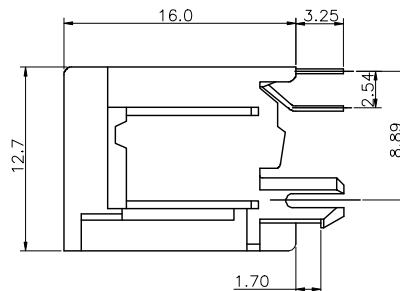



MATERIAL:
HOUSING: PBT,UL94V-0,Black
TERMINAL: PHOSPHOR BRONZE
MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG
OPERATING TEMPERATURE: -40°C~+85°C
STORAGE TEMPERATURE: -40°C~+85°C.
ELECTRICAL:
VOLTAGE: 125 VOLTS AC
CURRENT RATING:1.5AMP
DIELECTRIC STRENGTH:1000 VAC RMS 50HZ OR 60HZ,1 MIN
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL 500V DC FOR 1 MINUTE
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.
All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

C TEA117 - 08

XX

B

001

A

X

S

X

Standard Plating
05=Gold Flash/Tin
64=Gold 3u"/Tin

Color
1=Black

Standard Packing
B=Tray

格獲股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.'±3.0'	X.±0.35
.X'±2.0'	.X±0.30
.XX'±1.5'	.XX±0.25
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

TITLE.

CHECKED:

DATE:

PART NO.

RJ45 1*1 180'
TAB-UP

APPROVED:

DATE:

CTEA117-08XXB001AXSX

REV.	UNIT.	SCALE.	PAGE.
01	mm	1:1	1/1

