

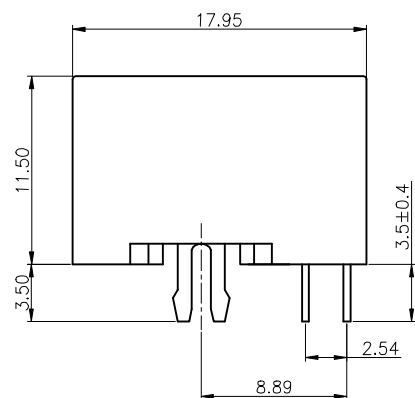
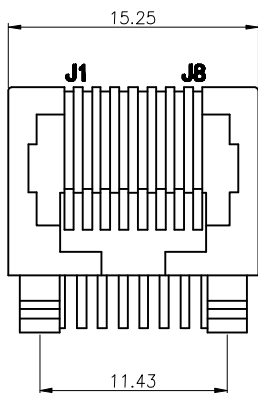


CABLE SIDE

MATERIAL:
HOUSING: PA46, UL94V-0, BLACK
TERMINAL: PHOSPHOR BRONZE
MACHANICAL:
DURABILITY: 750 CYCLES MIN, 12.5MM/MINUTE
INSERTION FORCE: 2.2KG.F MAX
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG
OPERATING TEMPERATURE: -40°C~+85°C
STORAGE TEMPERATURE: -40°C~+85°C.
ELECTRICAL:
VOLTAGE: 125 VOLTS AC
CURRENT RATING: 1.5AMP
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ, 1 MIN
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL 500V DC FOR 1 MINUTE
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.
All materials must meet GREENCONN hazardous substances control standards.



BOTTOM VIEW

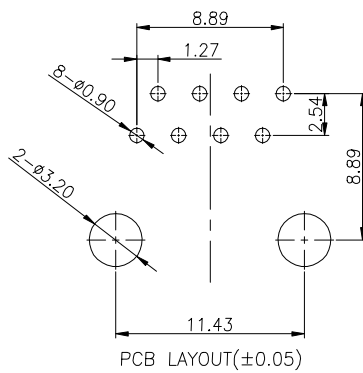

Ordering Information

C TEB112 - 08

XX

B

001

F

X

S

X

Standard Plating
02=Gold Flash
Selective Plating

Color
1=Black

Standard Packing
B=Tray

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.'±3.0'	X.±0.35
.X'±2.0'	.X±0.30
.XX'±1.5'	.XX±0.25
.XXX'±1.0'	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

CTEB112-CB1FS

TITLE.

RJ45 8P8C 1*1

CHECKED:

DATE:

PART NO.

CTEB112-08XXB001FXSX

APPROVED:

DATE:

REV.
02

UNIT.
mm

SCALE.
1:1

PAGE.
1/1



1

2

3

4

5

6

7

8

9