



FRONT VIEW

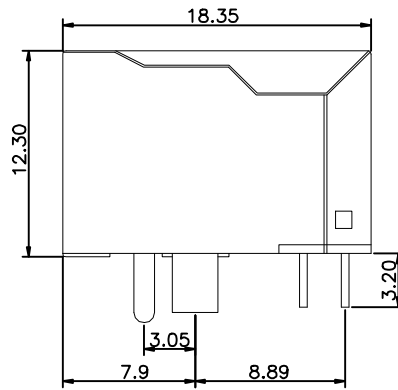


RIGHT SIDE VIEW

MATERIAL:  
 HOUSING: PA46,UL94V-0,BLACK.  
 TERMINAL: PHOSPHOR BRONZE  
 SHIELD: C2680  
 MECHANICAL:  
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
 INSERTION FORCE: 2.2KG.F MAX.  
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PWG  
 OPERATING TEMPERATURE: -40°C~+85°C.  
 STORAGE TEMPERATURE: -40°C~+85°C.  
 ELECTRICAL:  
 VOLTAGE: 125 VOLTS AC.  
 CURRENT RATING : 1.5AMP.  
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.  
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL  
 AFTER 500V DC FOR 1 MINUTE.  
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.  
 INITIAL 50 MILLIOHMS MAX. AFTER  
 DURABILITY TEST.


All materials must meet Greenconn'S requirements for environmental protection



BOTTOM VIEW

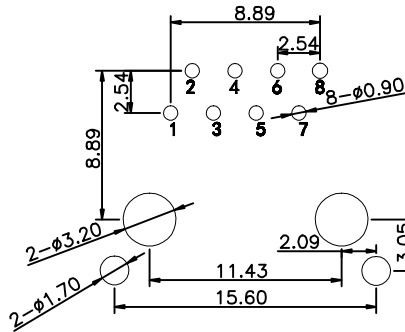

RECOMMENDED PCB LAYOUT  
 VIEWED FROM COMPONENT SIDE

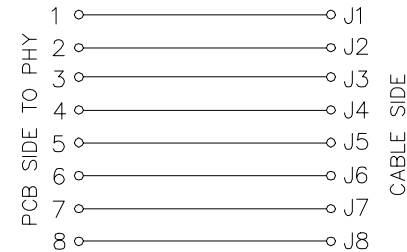

## Ordering Information

C TEB126 - XX XX B 007 F X A X

No. of Pins per Row: 08  
 Standard Plating:  
 02=Gold Flash  
 05=Gold Flash/Tin  
 64=Gold 3u"/Tin  
 53=Gold 6u"/Tin


Color: 1=Black  
 Standard Packing: B=Tray



Website: www.greenconn.com  
 E-mail: sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG  
 PROJ.



PAGE. 1/1

### GENERAL TOLERANCE

X.±5.0'	X.±0.35
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.10

DESIGNED:

CHECKED:

APPROVED:

DATE:

DATE:

DATE:

DWG. NO.

CTEB126-CB7FA

PART NO.

CTEB126-XXXX B007FXAX

TITLE.

RJ45直通 帶屏蔽無燈