


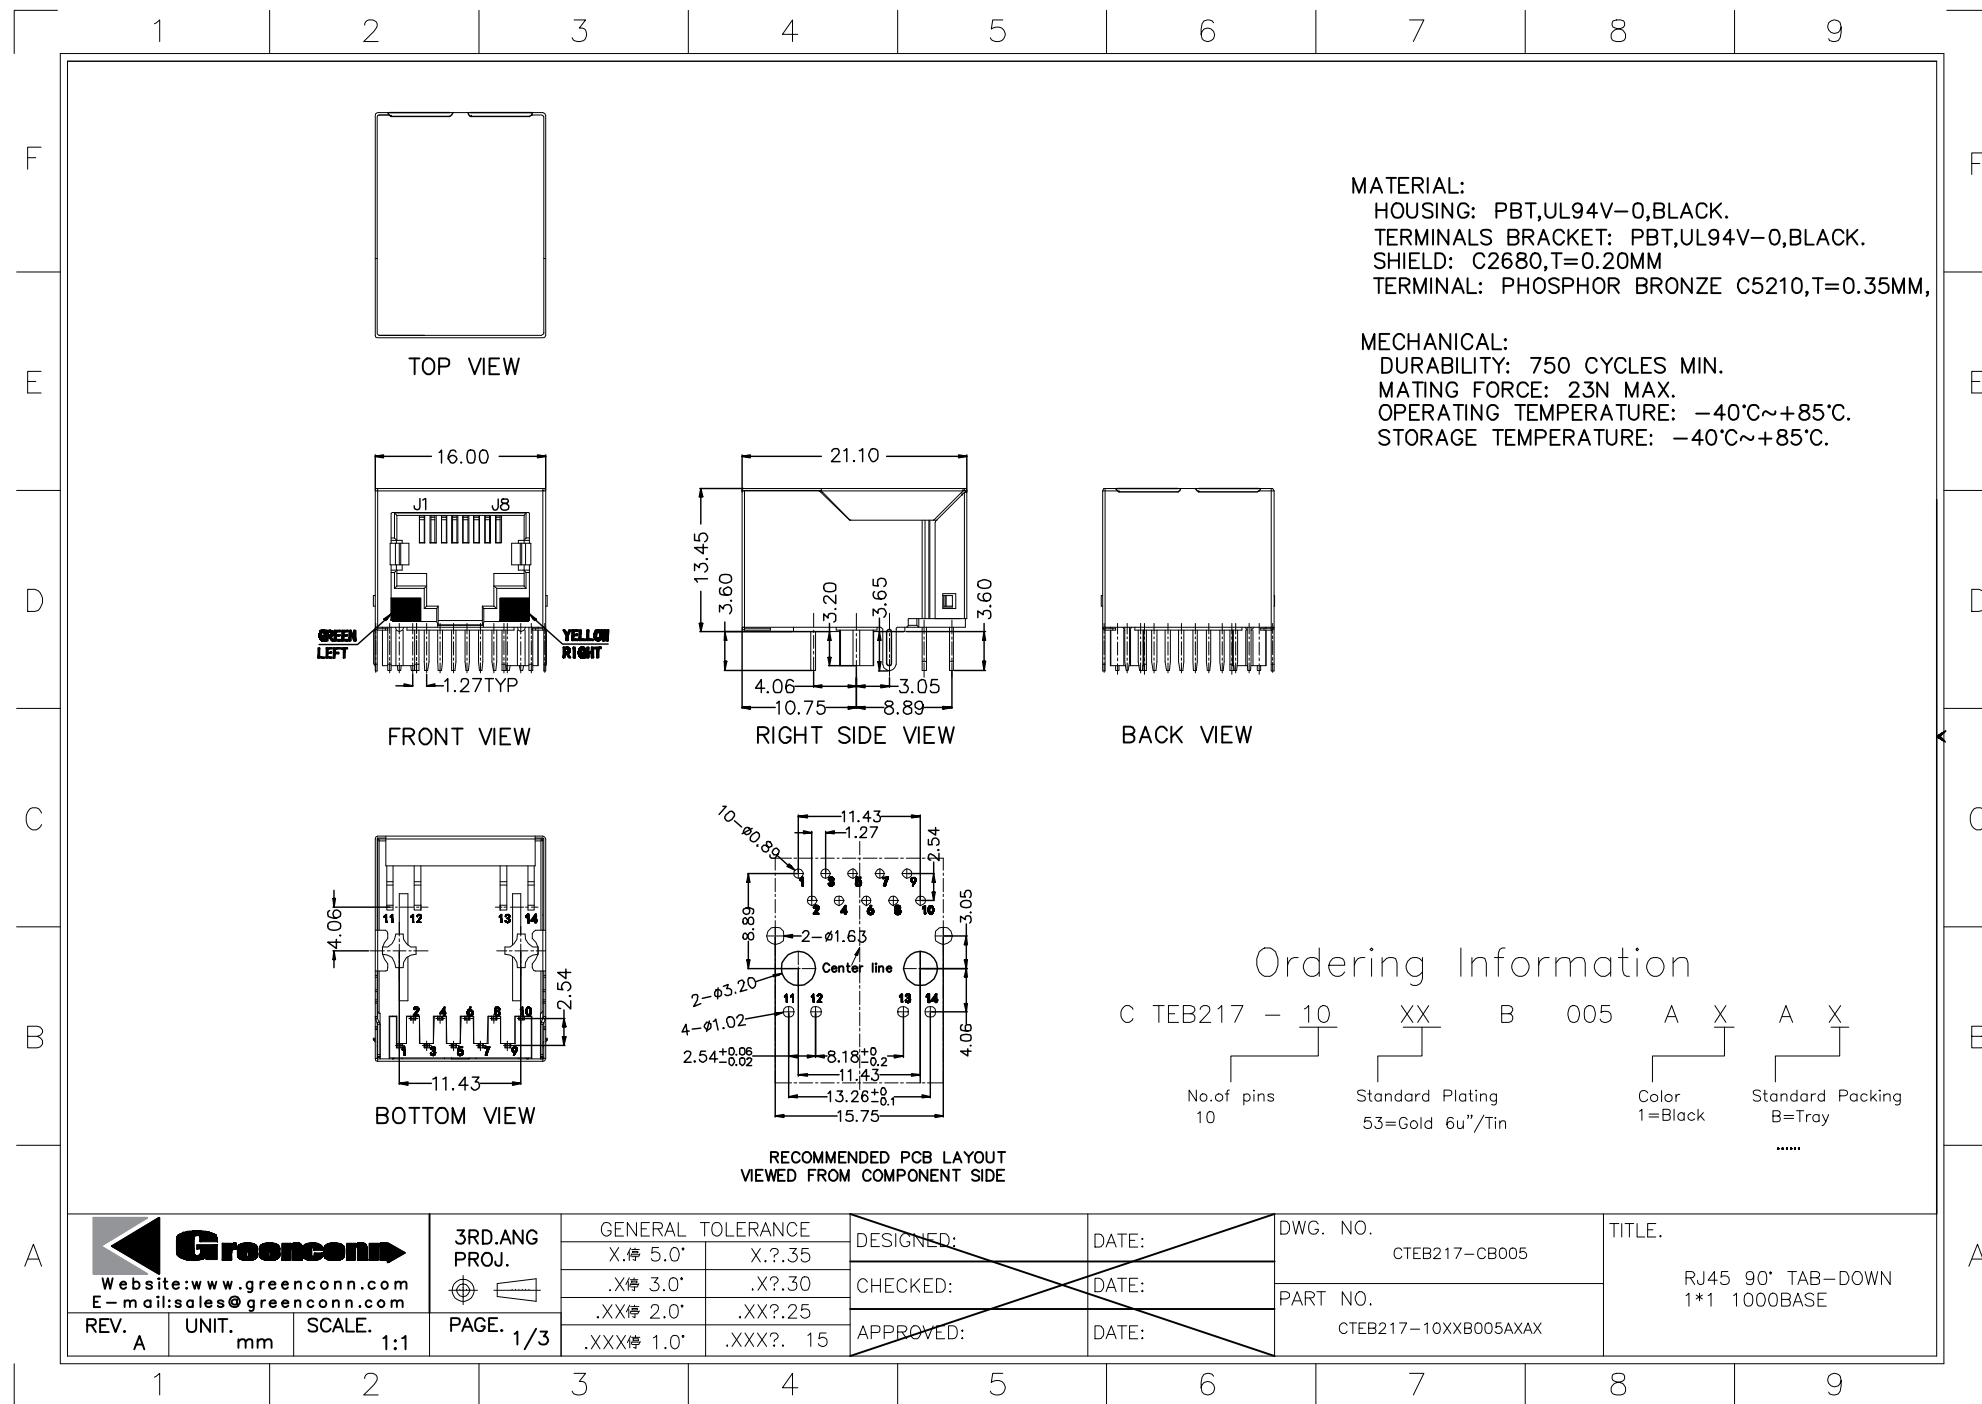

1 2 3 4 5 6 7 8 9

F


E

D

C

B

A

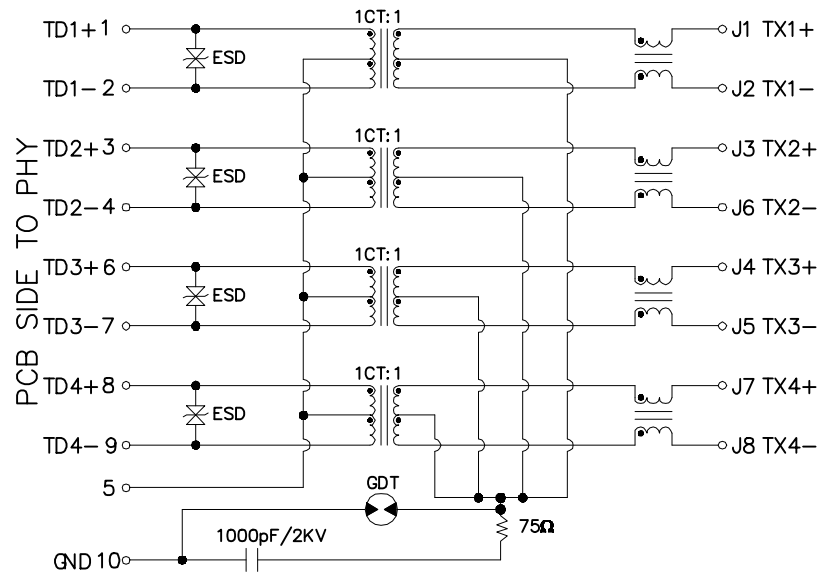


CABLE SIDE

Electrical:

- Turn ratio: 1~2: J1~J2=1CT:1CT(±2%).
3~4: J3~J6=1CT:1CT(±2%).
6~7: J4~J5=1CT:1CT(±2%).
8~9: J7~J8=1CT:1CT(±2%).
- OCL: 350uH Min.at 100KHz 100mV 8mA DC.
- Insertion Loss: -1.0 dB Max 1~100MHz.
- Return loss: -18dB Min 1~30MHz;
-14dB Min 30~60MHz.
-12dB Min 60~80MHz.
-10dB Min 80~100MHz.
- Cross talk: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
- CMR: -30dB Min 1~100MHz;
- IEC 61000-4-2 (ESD) ±30kV (air), ±30kV (contact);
IEC 61000-4-5 (SURGE) ±4kV (Difference Mode),
±6kV (Common mode).
- Hi-Pot: 2250V DC 6S 1mA PRI TO SEC.

LED Specification


Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85~2.45V
Yellow	585nm	20mA	1.7~2.2V

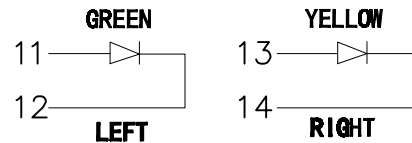

Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 2/3

GENERAL TOLERANCE

X. 5.0'	X. ? .35
.X. 3.0'	.X. ? .30
.XX. 2.0'	.XX. ? .25
.XXX. 1.0'	.XXX. ? .15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTEB217-CB005

PART NO.

CTEB217-10XXB005AXAX

TITLE.

RJ45 90° TAB-DOWN
1*1 1000BASE

1 2 3 4 5 6 7 8 9

