


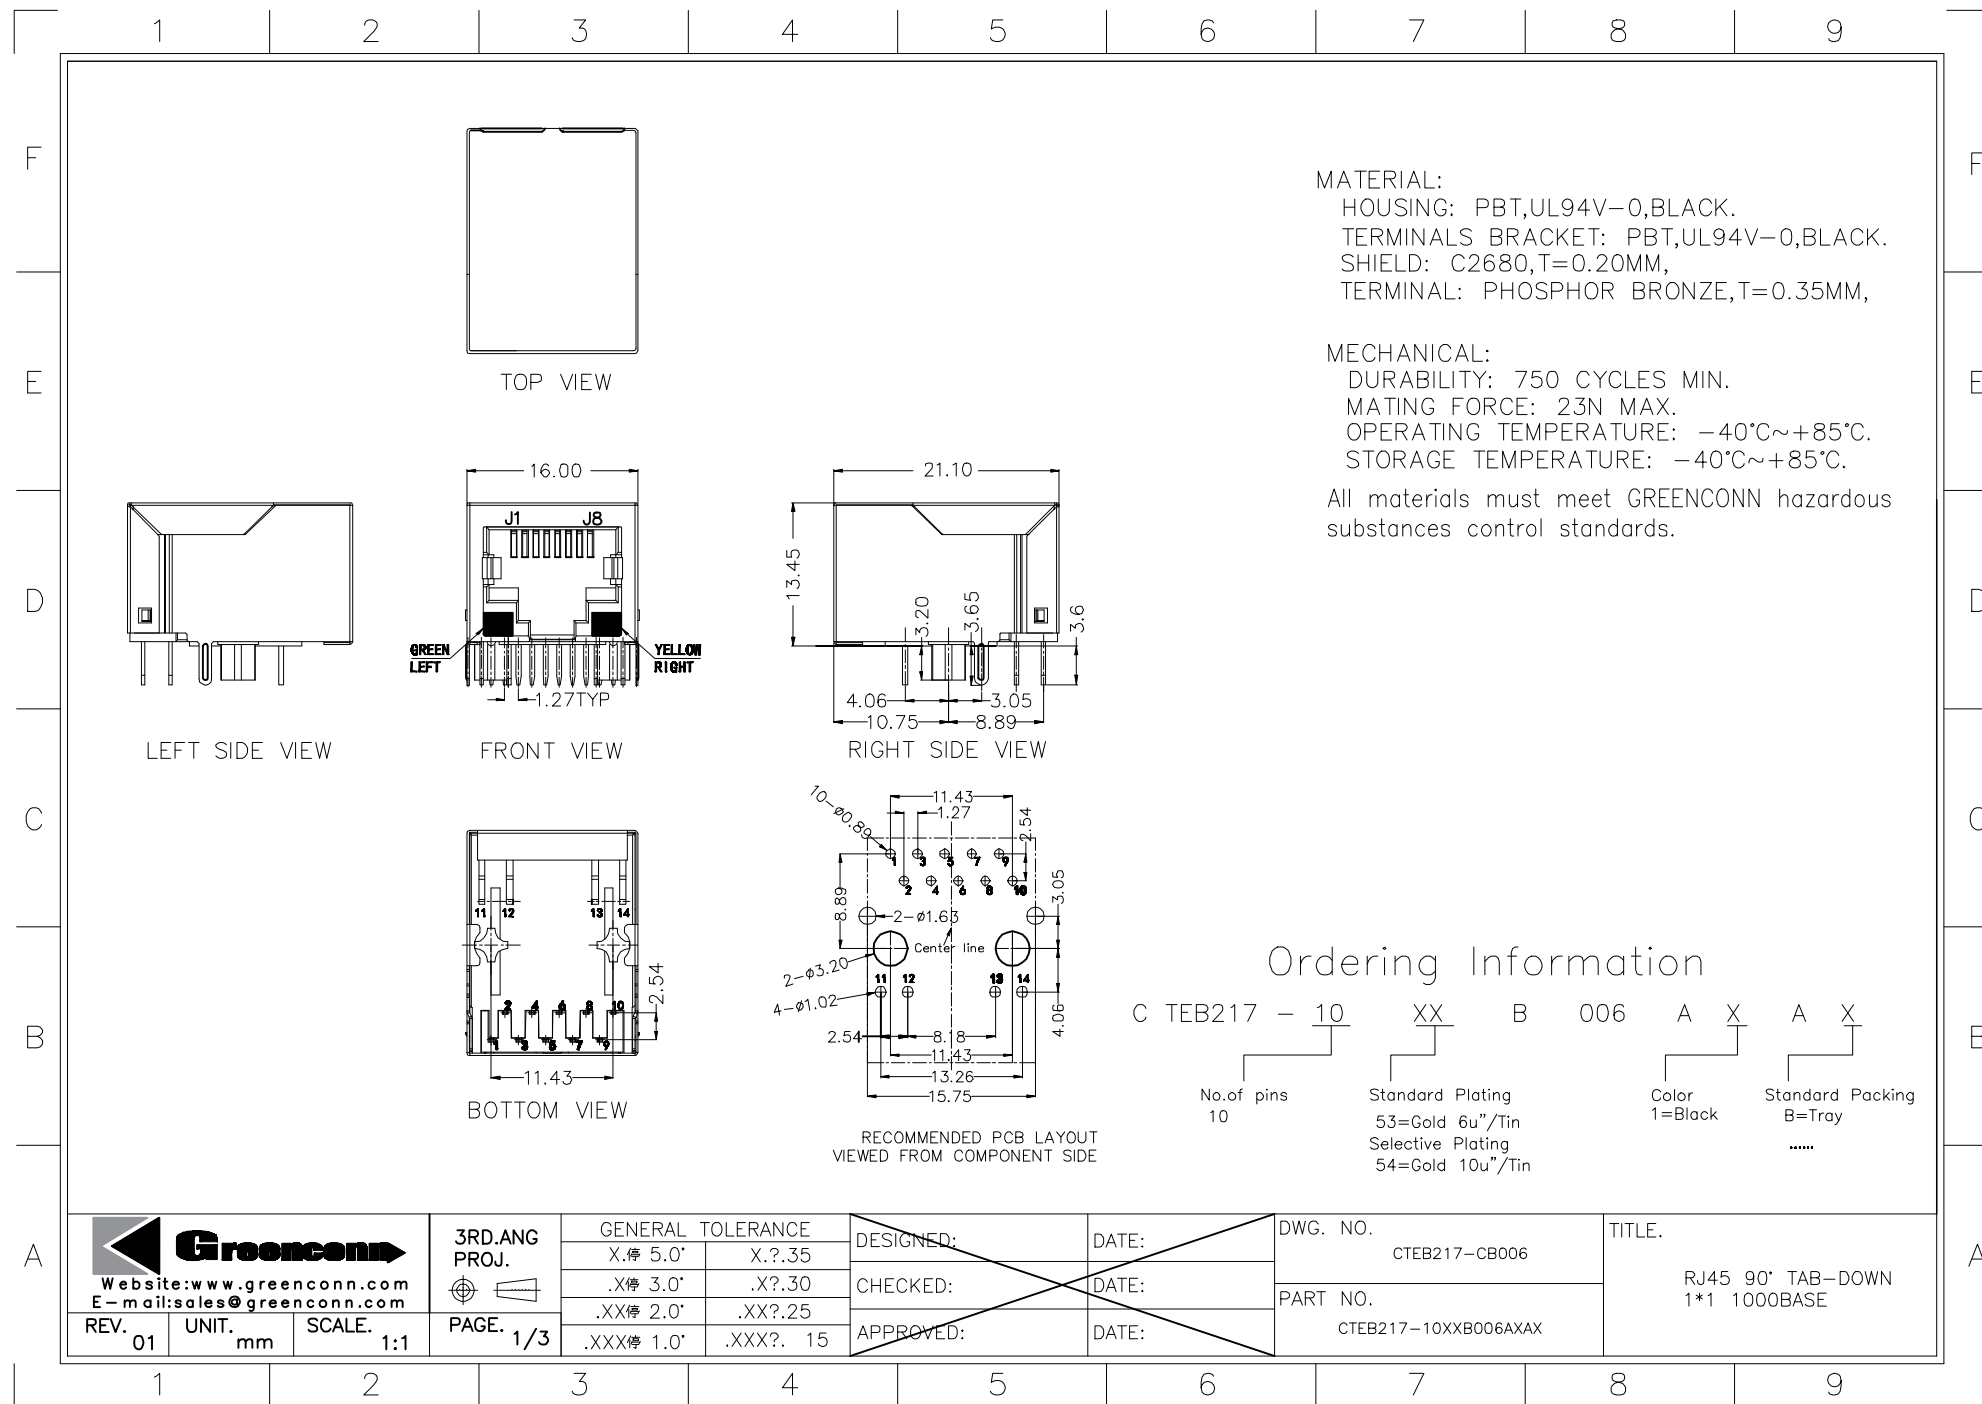

1 2 3 4 5 6 7 8 9

F


E

D

C


B

A

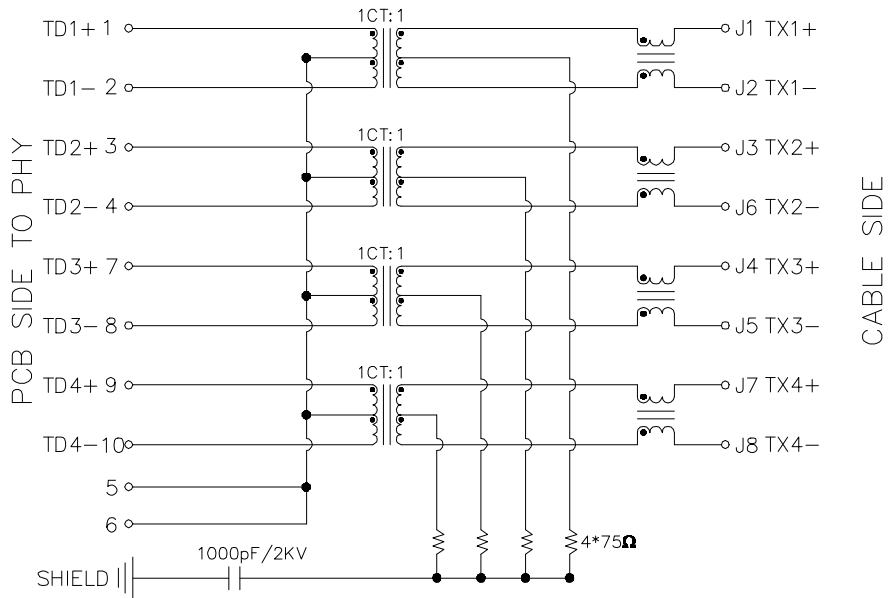

### Electrical:

- Turn ratio: 1~2: J1~J2=1CT:1CT(±2%).  
3~4: J3~J6=1CT:1CT(±2%).  
7~8: J4~J5=1CT:1CT(±2%).  
9~10: J7~J8=1CT:1CT(±2%).
- OCL: 350uH Min.at 100KHz 100mV 8mA DC.
- Insertion Loss: -1.0 dB Max 1~100MHz.
- Return loss: -18dB Min 1~30MHz;  
-14dB Min 30~60MHz.  
-12dB Min 60~80MHz.  
-10dB Min 80~100MHz.
- Cross talk: -40dB Min 1~30MHz;  
-35dB Min 30~60MHz;  
-30dB Min 60~100MHz;
- CMR: -30dB Min 1~100MHz;
- Hi-Pot: 2250V DC 6S 1mA PRI TO SEC

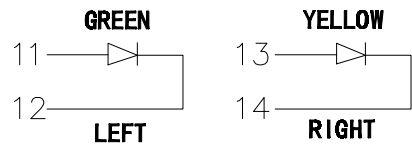

### LED Specification


| Standard LED Color | LED Wavelength | Foward(A) | Foward(V)  |
|--------------------|----------------|-----------|------------|
| Green              | 568nm          | 20mA      | 1.85~2.45V |
| Yellow             | 585nm          | 20mA      | 1.7~2.2V   |



Website: www.greenconn.com  
E-mail: sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG  
PROJ.



PAGE. 2/3

#### GENERAL TOLERANCE

|           |            |
|-----------|------------|
| X. 5.0'   | X. ? .35   |
| .X 3.0'   | .X ? .30   |
| .XX 2.0'  | .XX ? .25  |
| .XXX 1.0' | .XXX ? .15 |

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTEB217-CB006

PART NO.

CTEB217-10XXB006AXAX

TITLE.

RJ45 90° TAB-DOWN  
1\*1 1000BASE

1 2 3 4 5 6 7 8 9

