




1 2 3 4 5 6 7 8 9

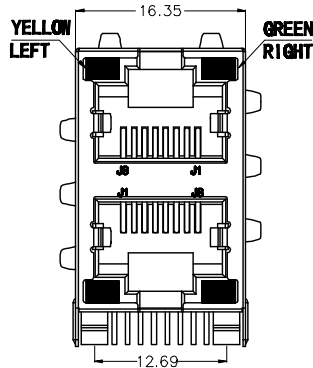


FRONT VIEW

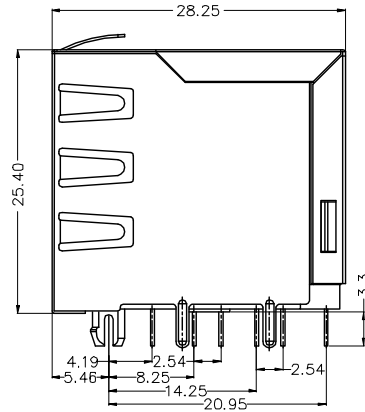

RIGHT SIDE VIEW



BOTTOM VIEW

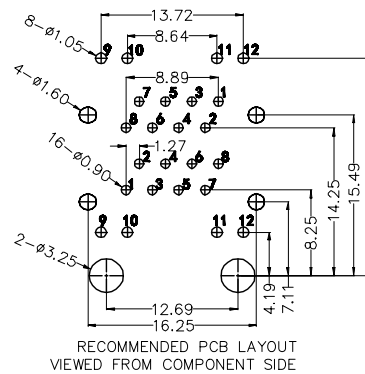

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE



MATERIAL:
HOUSING: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE $\varnothing=0.46\text{MM}$
SHIELD: C2680,T=0.20MM

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85~2.45V
Yellow	585nm	20mA	1.7~2.2V

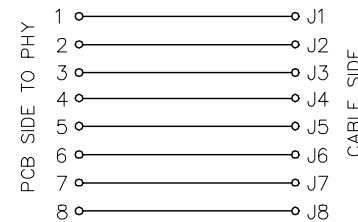

C TEB404 - 16 XX B 002 A X A X
No.of pins 16
Standard Plating
02=Gold Flash
Selective Plating
07=Gold 2u"
Color 1=Black
Standard Packing
B=Tray



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1
3RD.ANG PROJ. PAGE. 1/1

GENERAL TOLERANCE

X'±5.0"	X.±0.35
.X'±3.0"	.X±0.30
.XX'±2.0"	.XX±0.25
.XXX'±1.0"	.XXX±0.10

DESIGNED: DATE:
CHECKED: DATE:
APPROVED: DATE:

DWG. NO. CTEB404-CB002
PART NO. CTEB404-16XXB002AXAX

TITLE. RJ45 2X1PORT 90° DIP

1 2 3 4 5 6 7 8 9