



1 2 3 4 5 6 7 8 9


F  
E  
D  
C  
B  
A




FRONT VIEW




RIGHT SIDE VIEW



BACK VIEW



BOTTOM VIEW




RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE

MATERIAL:  
 HOUSING: LCP,UL94V-0,BLACK  
 TERMINAL: PHOSPHOR BRONZE  
 MACHANICAL:  
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE  
 INSERTION FORCE: 2.2KG.F MAX  
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG  
 OPERATING TEMPERATURE: -40°C~+85°C  
 STORAGE TEMPERATURE: -40°C~+85°C.  
 ELECTRICAL:  
 VOLTAGE: 125 VOLTS AC  
 CURRENT RATING:1.5AMP  
 DIELECTRIC STRENGTH:1000 VAC RMS 50HZ OR 60HZ,1 MIN  
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL 500V DC FOR 1 MINUTE  
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.  
 All materials must meet GREENCONN hazardous substances control standards.



### Ordering Information

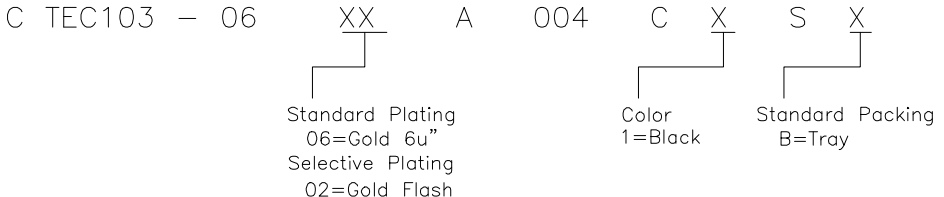

**格菱股份有限公司**  
**Greenconn Corporation**

REV. A		UNIT. mm	SCALE. 1:1	PAGE. 1/1	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. CTEC103-CA4CS	TITLE. RJ11 1*1 PORT 无灯
					X.'±3.0'	X.±0.35	CHECKED:	DATE:	PART NO. CTEC103-06XXA004CXSX	<b>全塑</b>
					.X'±2.0'	.X±0.30	APPROVED:	DATE:		
					.XX'±1.5'	.XX±0.25				
					.XXX'±1.0'	.XXX±0.10				

1 2 3 4 5 6 7 8 9