




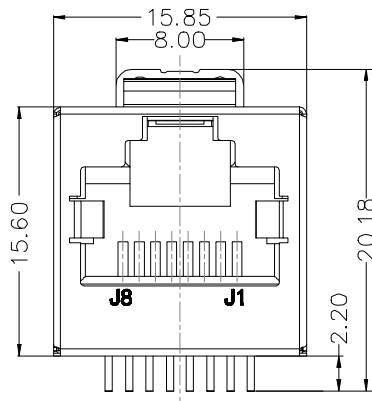

FRONT VIEW

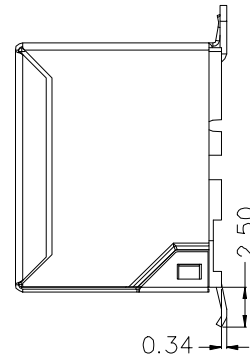

RIGHT SIDE VIEW




麦拉


MATERIAL:
HOUSING: PA9T,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.30MM
SHIELD: BRASS,T=0.20MM
MECHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40°C~+85°C
STORAGE TEMPERATURE: -40°C~+85°C

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.


All materials must meet GREENCONN hazardous substances control standards.



BOTTOM VIEW

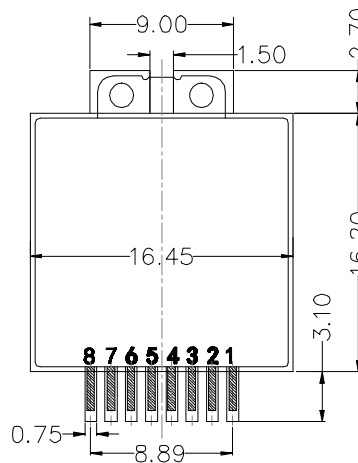

RECOMMENDED PCB LAYOUT

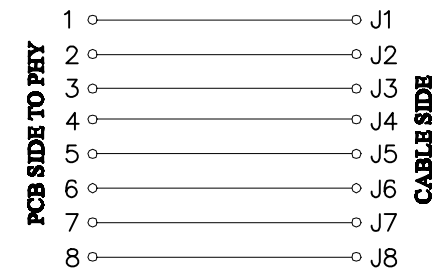

Ordering Information

C TEC108 - 08

XX

A

001

D

X

S

X

Standard Plating
53=Gold 6u"/Tin
Selective Plating
05=Gold Flash/Tin

Color
1=Black

Standard Packing
M=Tray+Mylar



Website:www.greenconn.com
E-mail:sales@greenconn.com

REV. 01 UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.

PAGE. 1/1

GENERAL TOLERANCE

X.±5.0'	X.±0.35
.X'±3.0'	.X±0.30
.XX'±2.0'	.XX±0.25
.XXX'±1.0'	.XXX±0.15

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTEC108-CA001

PART NO.

CTEC108-08XXA001DXSX

TITLE.

RJ45 1*1 8P8C