

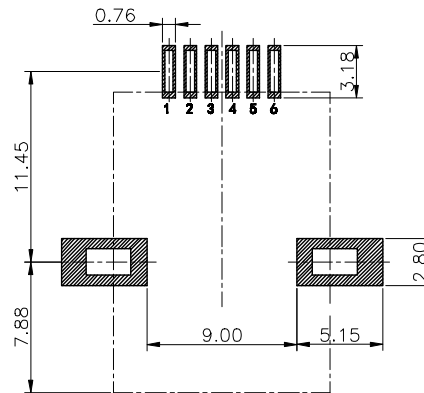
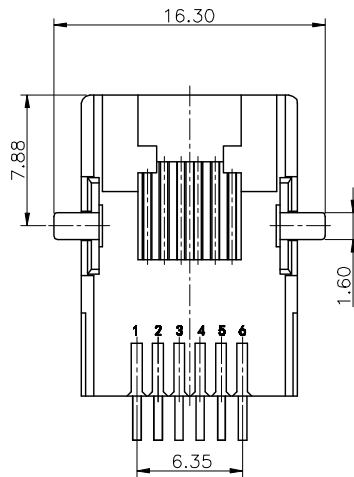
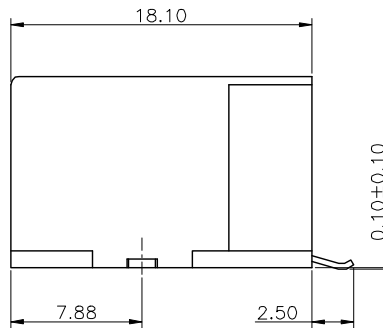




PCB LAYOUT(±0.05)



MATERIAL:
HOUSING: FR52,UL94V-0,BLACK
TERMINAL: PHOSPHOR BRONZE
MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE
INSERTION FORCE: 2.2KG.F MAX
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK
AND PLUG
OPERATING TEMPERATURE: 0°C~+70°C
STORAGE TEMPERATURE: -40°C~+85°C.
ELECTRICAL:
VOLTAGE: 125 VOLTS AC
CURRENT RATING:1.5AMP
DIELECTRIC STRENGTH:1000 VAC RMS 50HZ
OR 60HZ,1 MIN
INSULATION RESISTANCE: 500 MEGA OHMS
MIN. INITIAL 500V DC FOR 1 MINUTE
CONTACT RESISTANCE: SINGLE TERMINAL 30
MILLIOHMS MAX.INITIAL 50 MILLIOHMS MAX.
AFTER DURABILITY TEST.
All materials must meet GREENCONN
hazardous substances control standards.

Ordering Information

C TED103 - 06 XX A 001 E X S X

Standard Plating
53=Gold 6u"/Tin

Color
1=Black

Standard Packing
D=Tape&Reel

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.'±3.0'	X.±0.25
.X'±2.0'	.X±0.20
.XX'±1.5'	.XX±0.10
.XXX'±1.0'	.XXX±0.05

DESIGNED:

DATE:

DWG. NO.

CTED103-CA1ES

TITLE.

56 SMT 无灯全塑

CHECKED:

DATE:

PART NO.

CTED103-06XXA001ESX

APPROVED:

DATE:

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	