


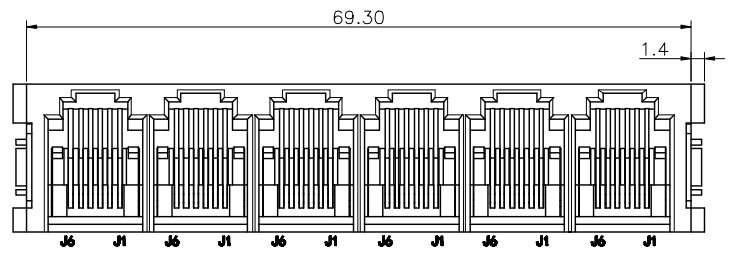


1 2 3 4 5 6 7 8 9


F
E
D
C
B
A

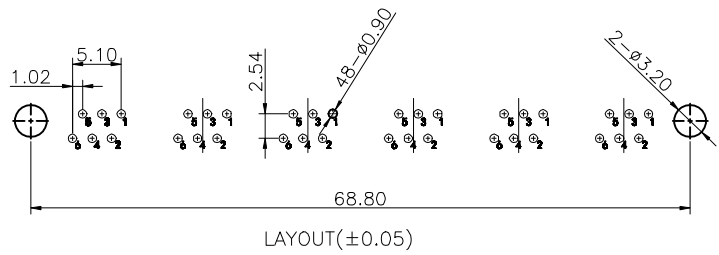

MATERIAL:
 HOUSING: PBT,UL94V-0,Gray
 TERMINAL: PHOSPHOR BRONZE
 MECHANICAL:
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG
 OPERATING TEMPERATURE: -40°C~+85°C
 STORAGE TEMPERATURE: -40°C~+85°C.
 ELECTRICAL:
 VOLTAGE: 125 VOLTS AC
 CURRENT RATING: 1.5AMP
 DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1 MIN
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL 500V DC FOR 1 MINUTE
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.
 All materials must meet GREENCONN hazardous substances control standards.

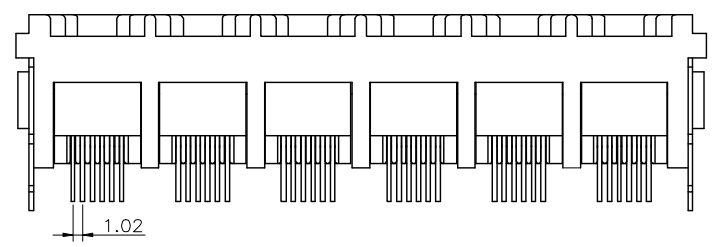

Ordering Information

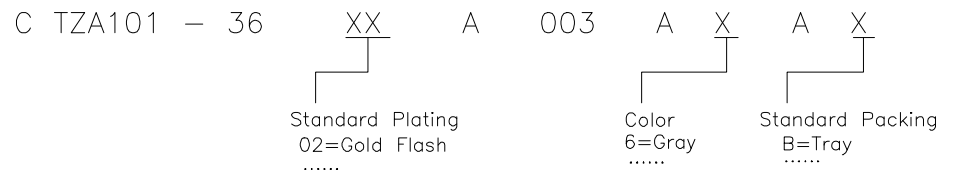

格稜股份有限公司
Greenconn Corporation

REV. 01	UNIT. mm	SCALE. 1:1	PAGE. 1/1	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. CTZA101-CA3AA	TITLE. RJ11 6P6C 1*6 PORT		
				X.'±3.0'	X.±0.35					CHECKED:	DATE:
				.X'±2.0'	.X±0.30						
				.XX'±1.5'	.XX±0.25	APPROVED:	DATE:	PART NO. CTZA101-36XXA003AXAX			
				.XXX'±1.0'	.XXX±0.10						

1 2 3 4 5 6 7 8 9