







FRONT VIEW

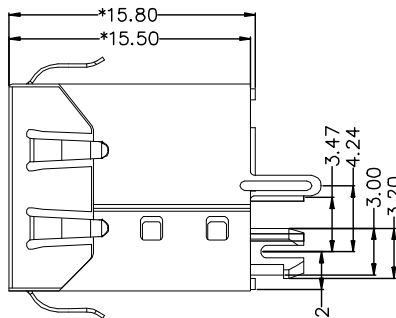


RIGHT SIDE VIEW



BOTTOM VIEW

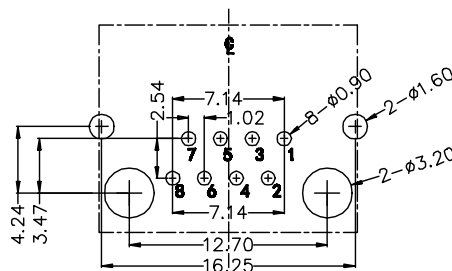

PCB LAYOUT(±0.05)

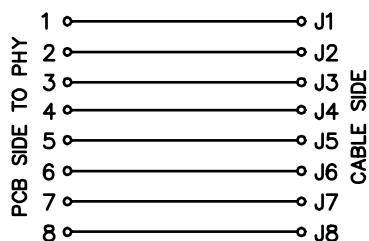

Material:
Housing: PBT ,UL 94V-0,Black
Terminal: Phosphor Bronze
Shield: C2680
Mechanical:
Durability: 750 cycles Min,12.5mm/minute
Insertion force: 2.2Kg.F Max.
Retention strength:
7.7Kg.F between jack and plug
Operating temperature: -40°~+85°
Electrical:
Voltage: 125 Volts AC.
Current rating: 1.5AMP
Dielectric strength:
1000 VAC RMS 50Hz or 60Hz,1MIN.
Insulation Resistance:
500 Mega ohms minimum initial after
500V DC for 1 minute.
Low Level Contact Resistance:
Single Terminal 30 milliohms maximum
initial 50 milliohms maximum after
durability test.
All materials must meet GREENCONN hazardous
substances control standards.

Ordering Information

C TZA108- 08 XX B 001 A X S X

Standard Plating
02=Gold Flash
Selective Plating
05=Gold Flash/Tin

Color
1=Black

Standard Packing
B=Tray

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE				DESIGN:	DATE:	DWG. NO.	TITLE.
REV.	UNIT.	SCALE.	PAGE.	X: ±/	X: ±/	CTZA108-CB1AS	
A	mm	1:1	1/1	.X: ±/	.X ±0.30	PART NO.	
				.XX: ±/	.XX ±0.20	CTZA108-08XXB001AXSX	180° TAP-UP
				.XXX: ±/	.XXX ±0.10		