



1 2 3 4 5 6 7 8 9


F




TOP VIEW

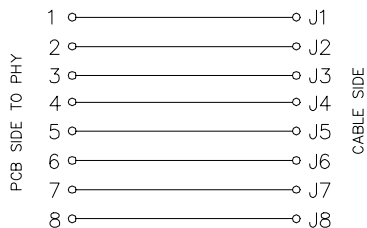


E



FRONT VIEW




RIGHT SIDE VIEW




BACK VIEW

D



BOTTOM VIEW



PCB LAYOUT(±0.05)


C

MATERIAL:  
 HOUSING: PA46,UL94V-0,BLACK  
 TERMINAL: PHOSPHOR BRONZE  
 MACHANICAL:  
 DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
 INSERTION FORCE: 2.2KG.F MAX  
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG  
 OPERATING TEMPERATURE: -40°C~+85°C  
 STORAGE TEMPERATURE: -40°C~+85°C.  
 ELECTRICAL:  
 VOLTAGE: 125 VOLTS AC  
 CURRENT RATING:1.5AMP  
 DIELECTRIC STRENGTH:1000 VAC RMS 50HZ OR 60HZ,1 MIN  
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL 500V DC FOR 1 MINUTE  
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.  
 All materials must meet GREENCONN hazardous substances control standards.

B

LED Specification

Standard LED Color	LED Wavelength	Forward(A)	Forward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V



Ordering Information

C TZA110 - 08 XX B 001 F X S X  
 Standard Plating 02=Gold Flash  
 Color 1=Black  
 Standard Packing B=Tray

A

格稜股份有限公司  
**Greenconn Corporation**

GENERAL TOLERANCE	
X: ±3.0'	X: ±0.35
.X' ±2.0'	.X' ±0.30
.XX' ±1.5'	.XX' ±0.25
.XXX' ±1.0'	.XXX' ±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. CTZA110-CB1FS
PART NO. CTZA110-08XXB001FXSX

TITLE. RJ45 180° DIP TAB-UP
-----------------------------------

1 2 3 4 5 6 7 8 9