







FRONT VIEW

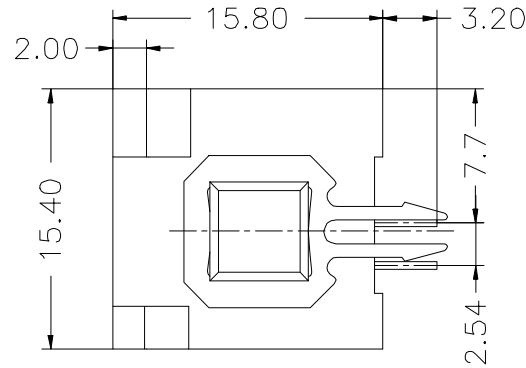

RIGHT SIDE VIEW



BOTTOM VIEW

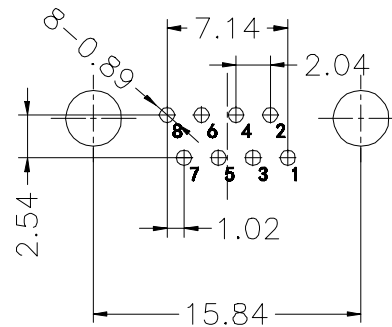

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:
HOUSING: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE $\varnothing=0.46\text{MM}$
IRON FEET: IRON.

MACHANICAL:
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: $-40^{\circ}\text{C}+85^{\circ}\text{C}$
STORAGE TEMPERATURE: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$.

ELECTRICAL:
VOLTAGE: 125 VOLTS AC.
CURRENT RATING: 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX. INITIAL
50 MILLIOHMS MAX. AFTER DURABILITY TEST.

1	○	J1
2	○	J2
3	○	J3
4	○	J4
5	○	J5
6	○	J6
7	○	J7
8	○	J8

POB SIDE TO PHY

CABLE SIDE

Ordering Information


C	TZA206	-	08	XX	A	001	A	X	S	X
			No. of pins	Standard Plating			Color		Standard Packing	
			08	02=Gold Flash			1=Black		B=Tray	



Website: www.greenconn.com
E-mail: sales@greenconn.com

REV. A UNIT. mm SCALE. 1:1

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X. 5.0'	X. ? .35
.X. 3.0'	.X. ? .30
.XX. 2.0'	.XX. ? .25
.XXX. 1.0'	.XXX. ? .10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

CTZA206-CA1AS

PART NO.

CTZA206-08XXA001AXSX

TITLE.

RJ45 8P8C 无灯全塑
(带铁脚)