
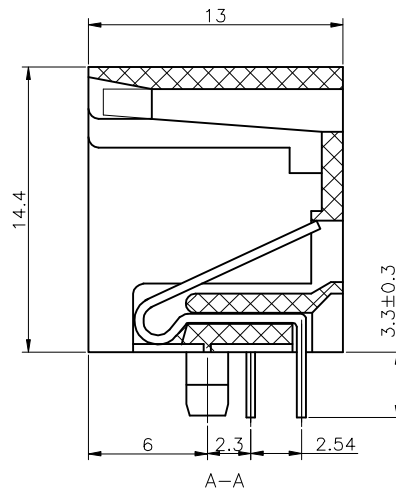
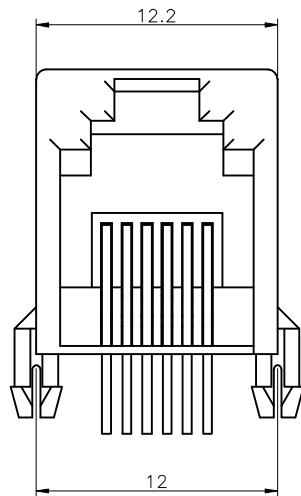


PCB LAYOUT(±0.05)



ELECTRICAL:

- 1.Voltage Rating: 125 VAC RMS
- 2.Current Rating: 1.5 AMP
- 3.Contact Resistance: 30mΩ MAX
- 4.Insulation Resistance:500 MEGOHMS min @500 VDC
- 5.Dielectric Strength: 1000 VAC RMS 50Hz or 60Hz,1MIN

MECHANICAL:

- 1.Housing & Insulation Material:PBT UL94V-0
- 2.Contact Material: Phosphor Bronze, Gold Plating Over Nickel
- 3.Mating/Unmating Force:2.2kg, F MAX
- 4.Retention Strength: 7.7kg F MIN Between Jack AND Plug
- 5.Operating Life:750 Cycles MIN

ENVIRONMENTAL:

- 1.Storage:-40°C ~ +85°C
- 2.Operation:-40°C ~ +85°C

All materials must meet GREENCONN hazardous substances control standards.

Ordering Information

C TZB108 - 06 XX B 004 A X S X

Standard Plating
02=Gold Flash

Color
1=Black

Standard Packing
B=Tray

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X:±/	X.±/
.X'±/	.X±0.30
.XX'±/	.XX±0.20
.XXX'±/	.XXX±0.10

DESIGN:

DATE:

DWG. NO.

CTZB108-CB4AS

TITLE.

1X1 Tab-UP RJ11

CHECKED:

DATE:

PART NO.

CTZB108-06XXB004AXSX

APPROVED:

DATE:

REV.	UNIT.	SCALE.	PAGE.	
01	mm	1:1	1/1	